

Device Modeling Report


COMPONENTS: Programmable Unijunction Transistor
PART NUMBER: TN41A
MANUFACTURER: TOSHIBA




Bee Technologies Inc.

Pspice model parameter	Model description
IS	Saturation Current
ISE	Non-ideal Base-Emitter Diode Saturation Current
RC	Series Collector Resistance
TR	Reverse transit time
TF	Forward Transit Time

Equivalent circuit

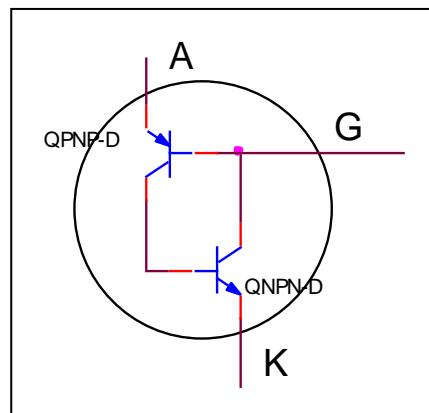

Peak Voltage (V_p) and Peak Current (I_p) Characteristics

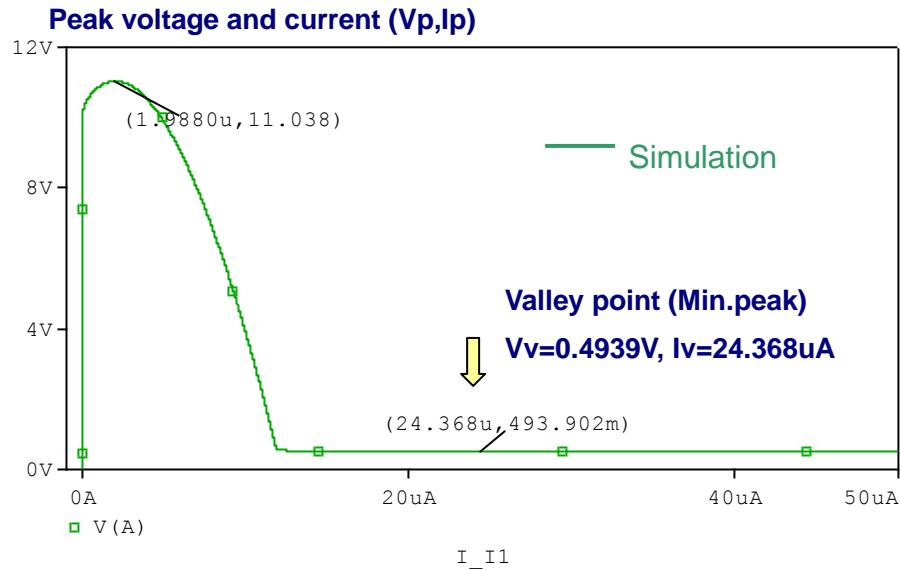


Simulation Result

$$V_p=11.038(V) \quad \text{at } I_p=2u(A)$$

SPEC: V_p=10.2(V) to 11.6(V) at I_{p(max.)}=2u(A)

Forward Voltage Characteristics

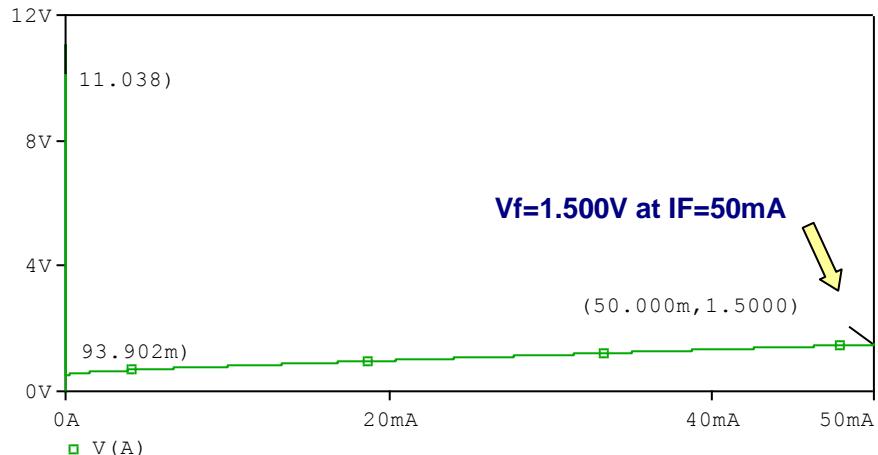


Simulation Result

$$V_f=1.5(V) \quad \text{at } I_f=50m(A)$$


SPEC: V_f=1.5(V)MAX. at I_f=50m(A)

Voltage and Current Characteristics


Reference

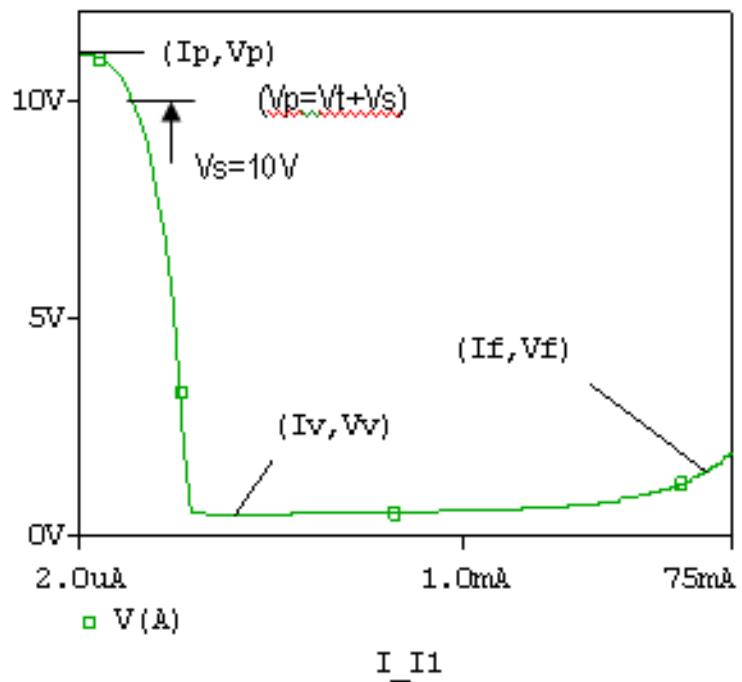

Evaluation Circuit

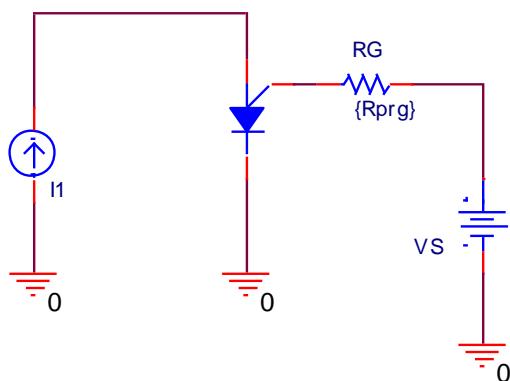

Pulse Output Voltage and Pulse Output Rise Time

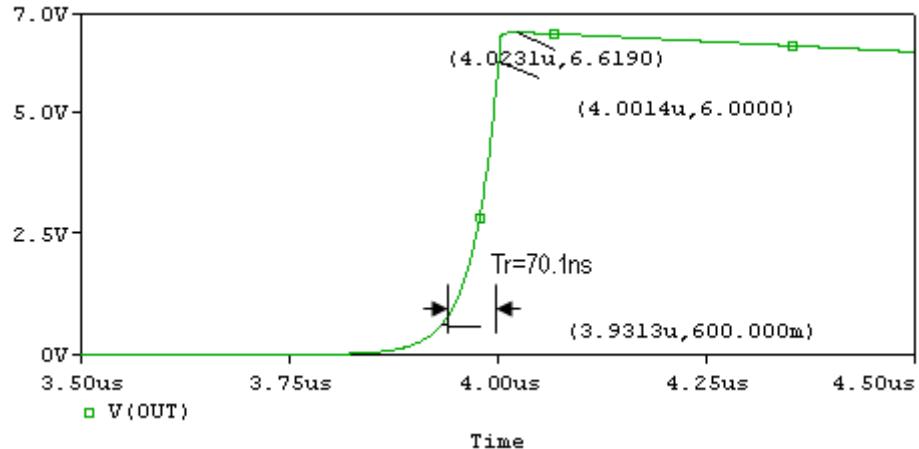

V_o=6.619(V) at V_i=20(V), C_t=0.2u(F)

SPEC: V_o=6(V) to 10(V) at V_i=20(V), C_t=0.2u(F)

tr=70.1(ns) at V_i=20(V), C_t=0.2u(F)

SPEC: tr=70(ns) to 80(ns) at V_i=20(V), C_t=0.2u(F)

Evaluation circuit

