

Device Modeling Report

COMPONENTS:
DIODE/ SCHOOTKY RECTIFIER / STANDARD
PART NUMBER: DE10PC3
MANUFACTURER: SHINDENGEN




Bee Technologies Inc.


PSpice model parameter	Model description
IS	Saturation Current
N	Emission Coefficient
RS	Series Resistance
IKF	High-injection Knee Current
CJO	Zero-bias Junction Capacitance
M	Junction Grading Coefficient
VJ	Junction Potential
ISR	Recombination Current Saturation Value
BV	Reverse Breakdown Voltage(a positive value)
IBV	Reverse Breakdown Current(a positive value)
TT	Transit Time
EG	Energy-band Gap

Forward Current Characteristic

Circuit Simulation Result

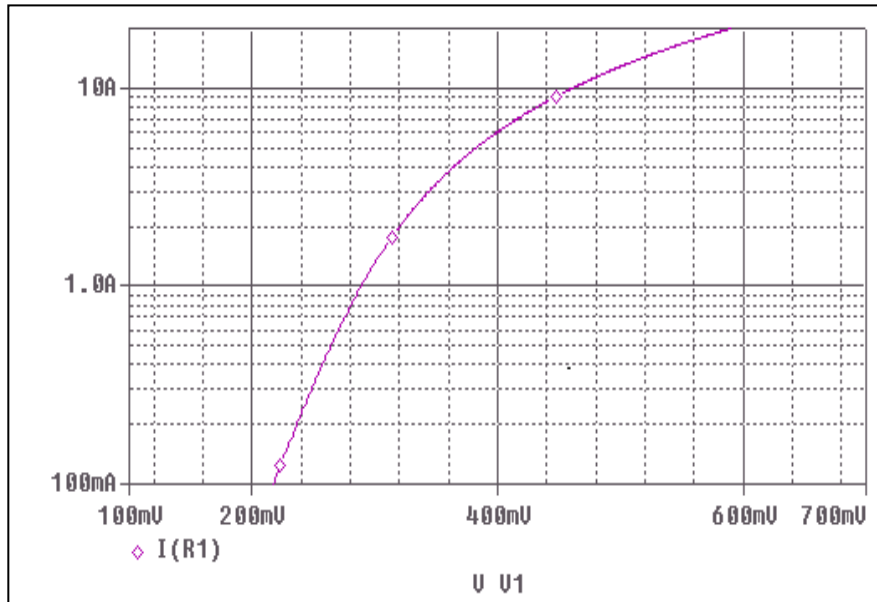


Evaluation Circuit

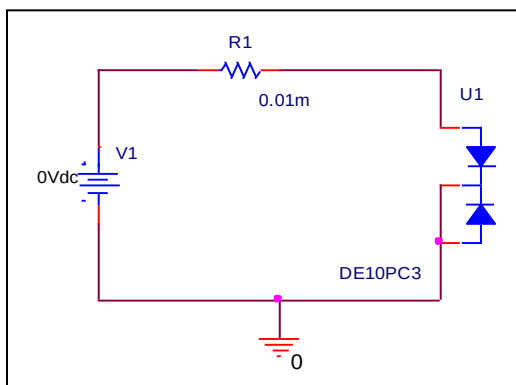

Comparison Graph

Circuit Simulation Result

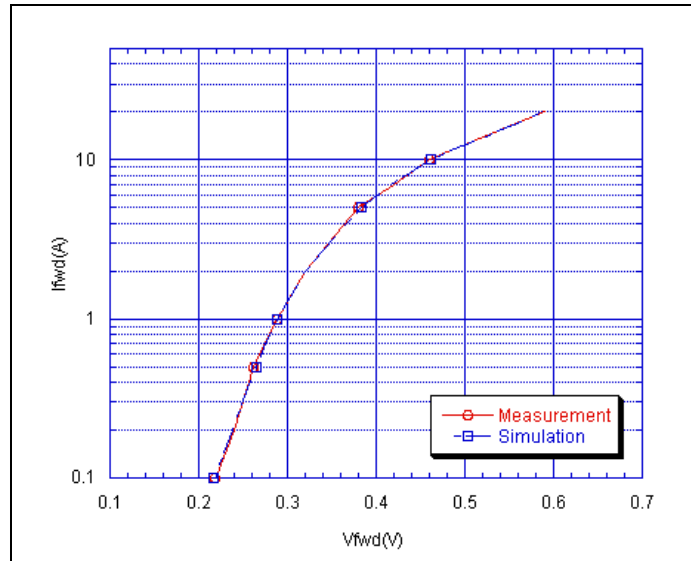


Simulation Result


Ifwd(A)	Vfwd(V) Measurement	Vfwd(V) Simulation	%Error
0.1	0.218	0.218	-0.23
0.2	0.240	0.238	-0.83
0.5	0.262	0.264	0.88
1	0.288	0.289	0.31
2	0.320	0.320	0.03
5	0.380	0.383	0.74
10	0.460	0.461	0.24
20	0.590	0.590	0.03

Junction Capacitance Characteristic

Circuit Simulation Result

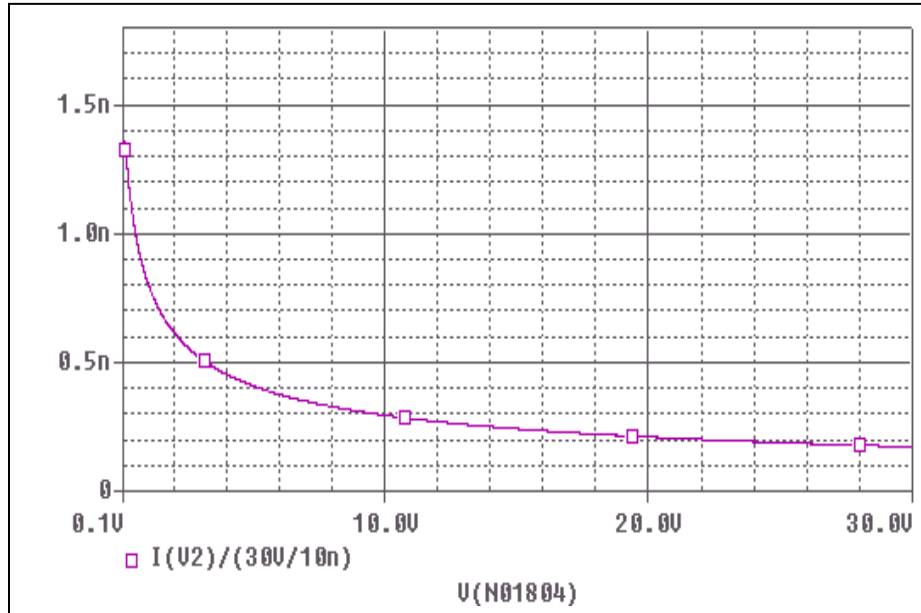


Evaluation Circuit

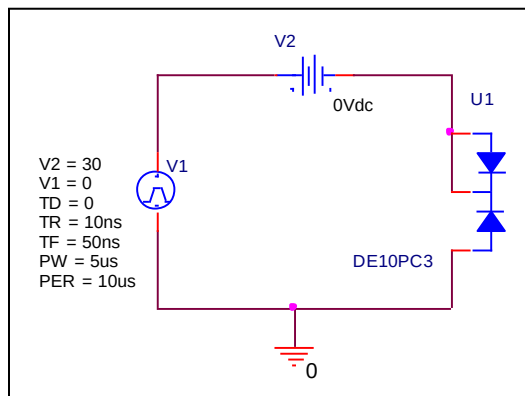

Comparison Graph

Circuit Simulation Result

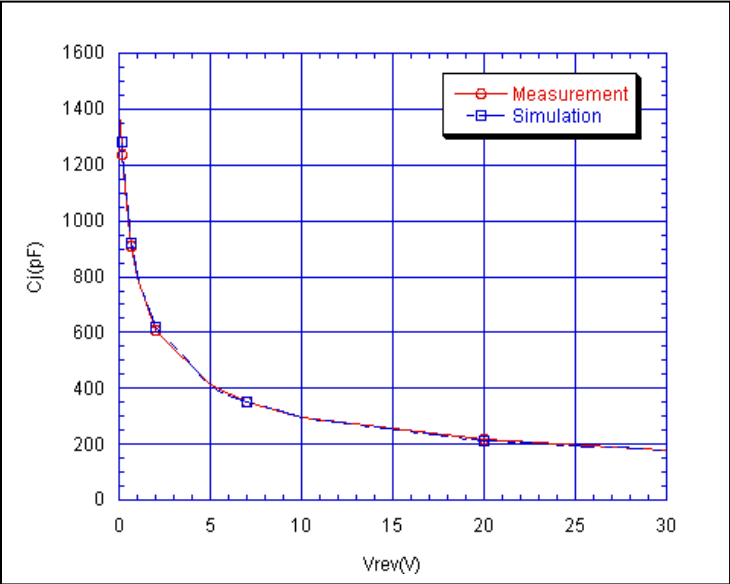

Simulation Result

Vrev(V)	Cj(pF) Measurement	Cj(pF) Simulation	%Error
0.1	1360.000	1319.000	-3.01
0.2	1240.000	1280.000	3.23
0.5	1005.000	1042.000	3.68
1	795.000	800.700	0.72
2	610.000	618.800	1.44
5	415.000	409.500	-1.33
10	295.000	294.500	-0.17
20	215.000	212.300	-1.26
30	175.000	174.300	-0.40