

Device Modeling Report

COMPONENTS:

DIODE/ GENERAL PURPOSE RECTIFIER/ PROFESSIONAL

PART NUMBER: 1SS250

MANUFACTURER: TOSHIBA



Bee Technologies Inc.


All Rights Reserved Copyright (C) Bee Technologies Inc. 2008

DIODE MODEL PARAMETERS


PSpice model parameter	Model description
IS	Saturation Current
N	Emission Coefficient
RS	Series Resistance
IKF	High-injection Knee Current
CJO	Zero-bias Junction Capacitance
M	Junction Grading Coefficient
VJ	Junction Potential
ISR	Recombination Current Saturation Value
BV	Reverse Breakdown Voltage(a positive value)
IBV	Reverse Breakdown Current(a positive value)
TT	Transit Time
EG	Energy-band Gap

Forward Current Characteristic

Circuit Simulation Result

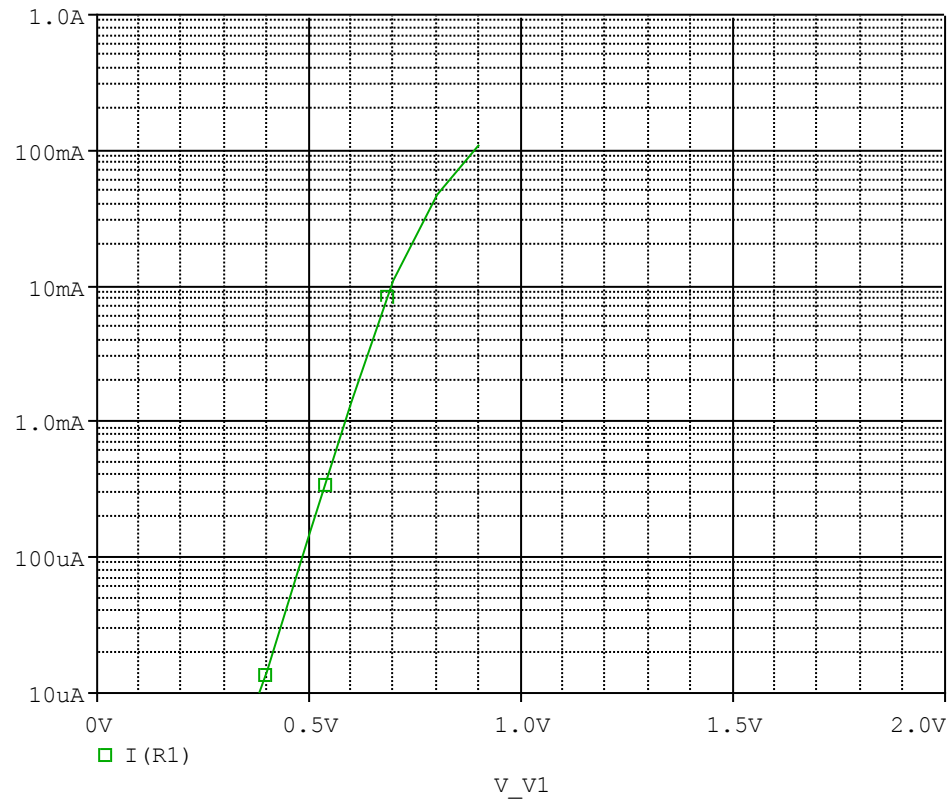


Evaluation Circuit

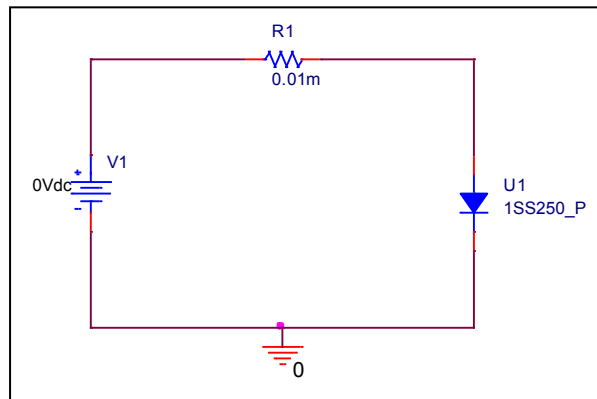

Comparison Graph

Circuit Simulation Result

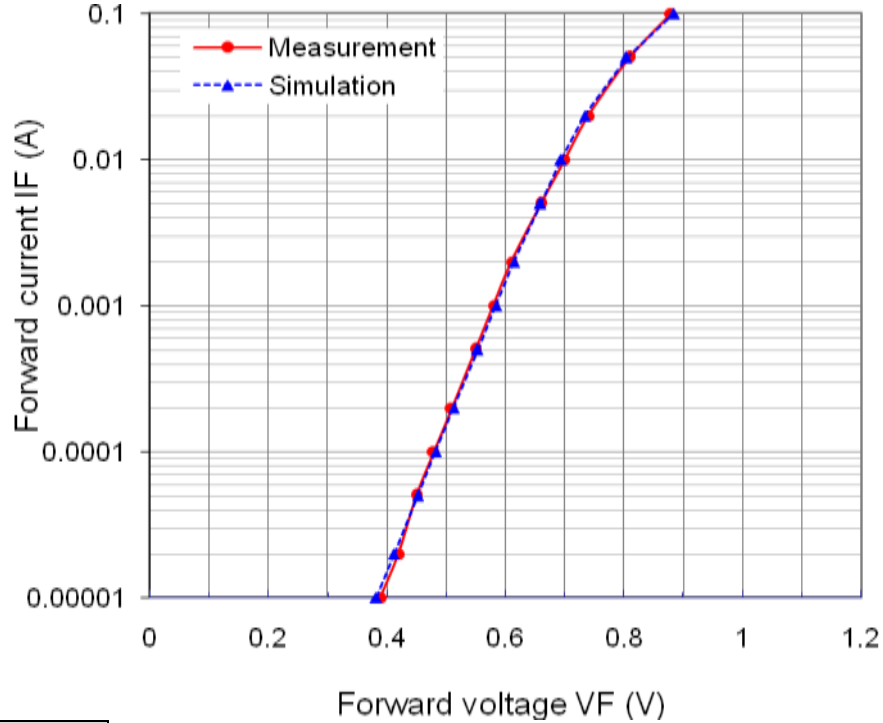


Simulation Result


Ifwd (A)	Vfwd (V)		%Error
	Measurement	Simulation	
0.00001	0.390	0.382	-2.05
0.00002	0.420	0.412	-1.90
0.00005	0.450	0.452	0.44
0.0001	0.480	0.483	0.63
0.0002	0.510	0.513	0.59
0.0005	0.550	0.553	0.55
0.001	0.580	0.584	0.69
0.002	0.610	0.615	0.82
0.005	0.660	0.659	-0.15
0.01	0.700	0.694	-0.86
0.02	0.740	0.734	-0.81
0.05	0.810	0.804	-0.74
0.1	0.880	0.884	0.45

Capacitance Characteristic

Circuit Simulation Result

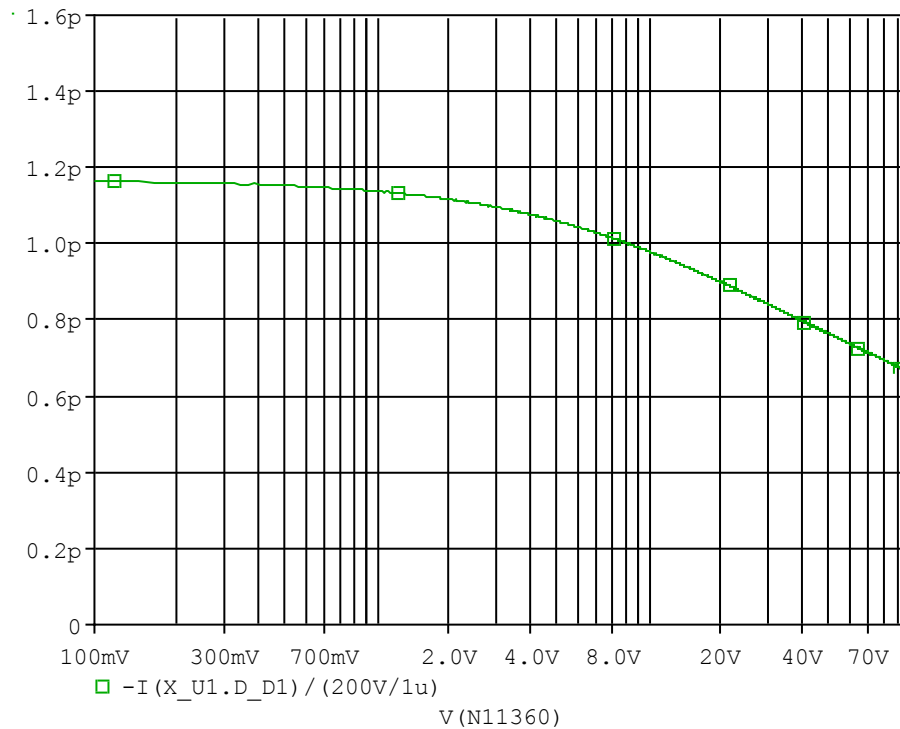


Evaluation Circuit

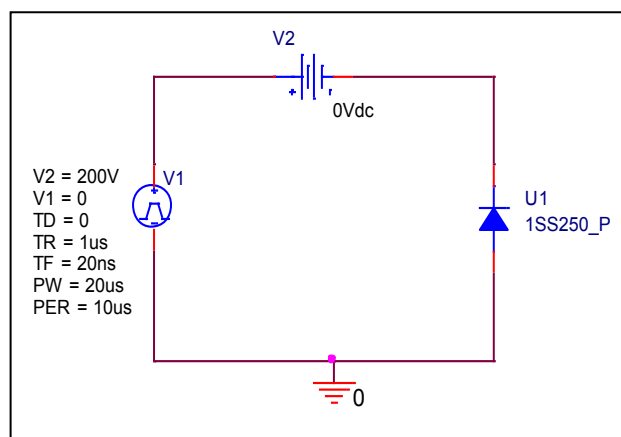

Comparison Graph

Circuit Simulation Result

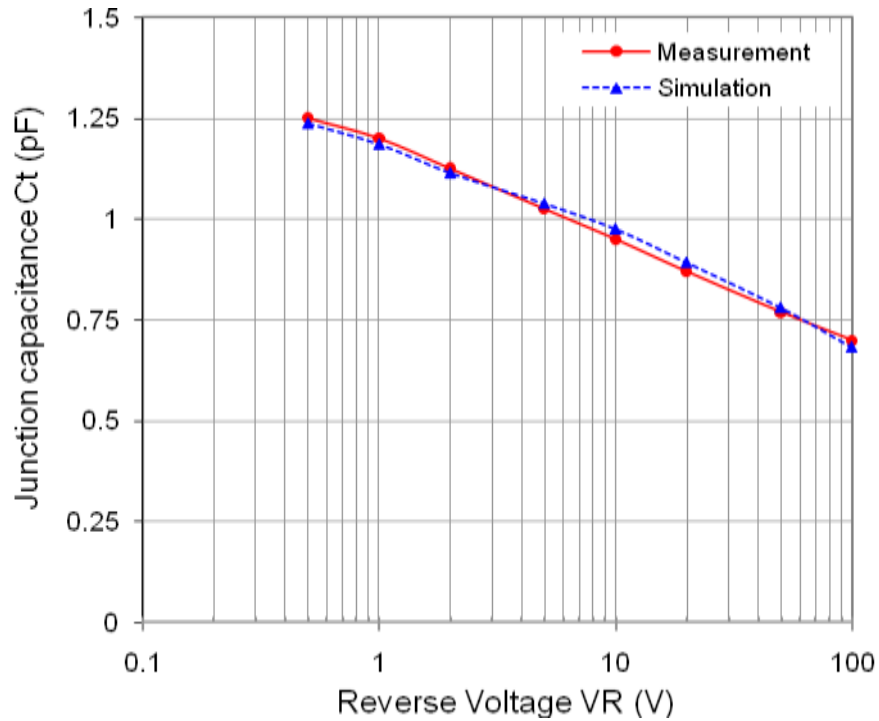


Simulation Result


Vrev (V)	Ct (pF)		%Error
	Measurement	Simulation	
0.5	1.250	1.237	-1.04
1	1.200	1.185	-1.25
2	1.125	1.114	-0.98
5	1.025	1.038	1.27
10	0.950	0.975	2.63
20	0.870	0.892	2.53
50	0.770	0.780	1.30
100	0.700	0.682	-2.57

Reverse Recovery Characteristic

Circuit Simulation Result

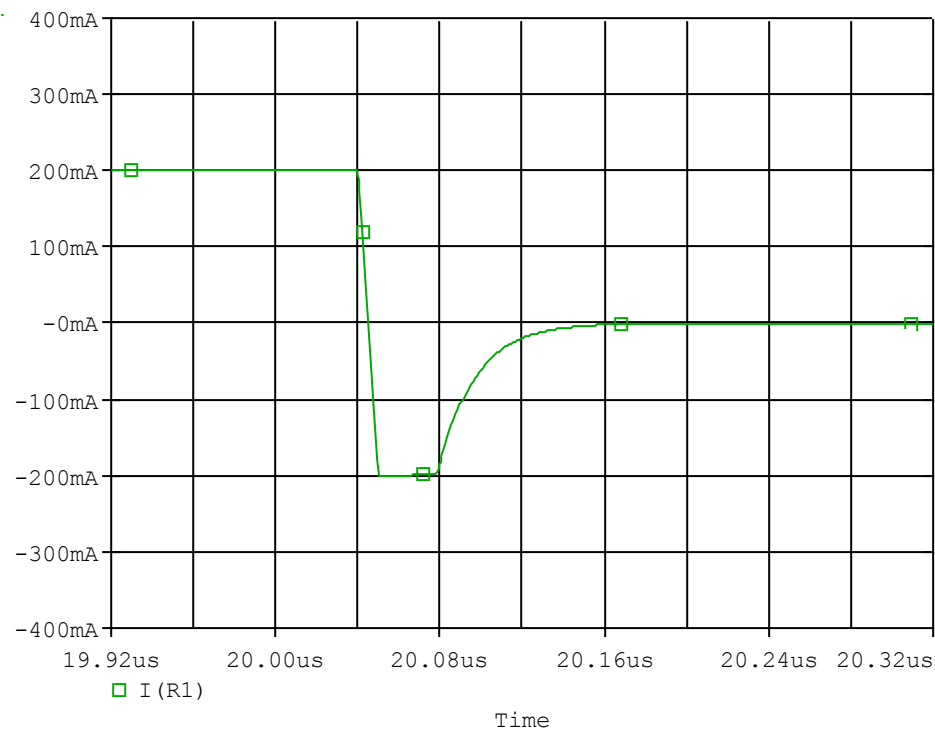

Evaluation Circuit

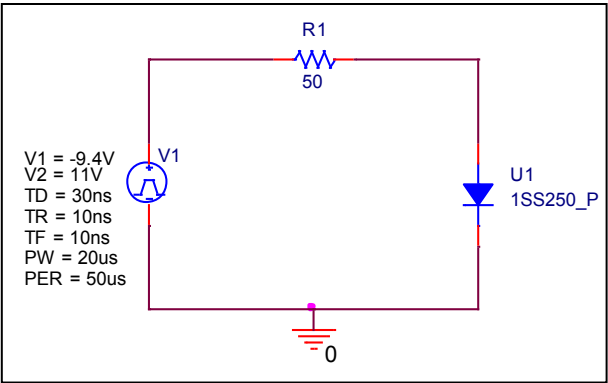


Compare Measurement vs. Simulation

		Measurement	Simulation	%Error
trj	ns	32.800	32.506	-0.89
trb	ns	39.200	39.269	0.17
trr	ns	72.000	71.775	-0.31

Reverse Recovery Characteristic


Reference

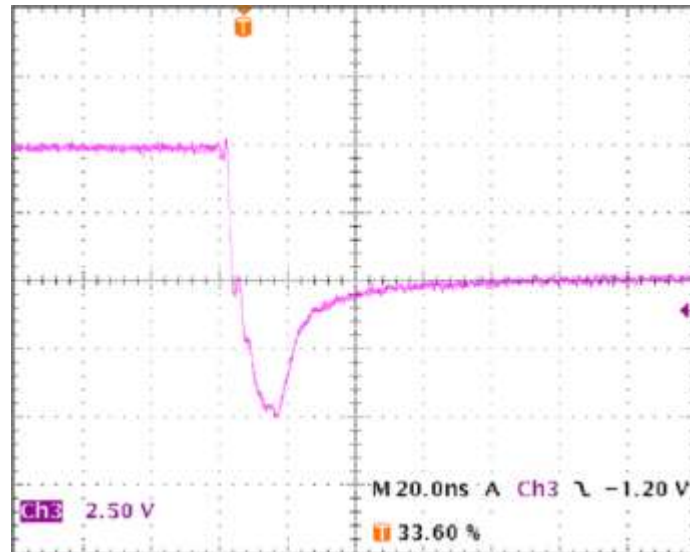

$T_{rj} = 32.8(\text{ns})$

$T_{rb} = 39.2(\text{ns})$

Conditions: $I_{fwd} = 0.2\text{A}$, $I_{rev} = 0.2\text{A}$, $R_I = 50$

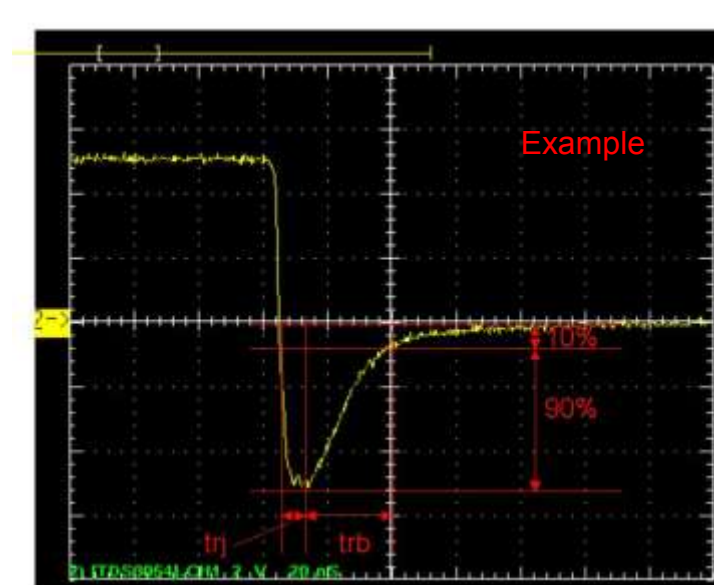

Relation between t_{rj} and t_{rb}