

# Device Modeling Report

COMPONENTS:

DIODE/ GENERAL PURPOSE RECTIFIER/ PROFESSIONAL

PART NUMBER: S5295G

MANUFACTURER: TOSHIBA




Bee Technologies Inc.


| PSpice model parameter | Model description                           |
|------------------------|---|
| IS                     | Saturation Current                          |
| N                      | Emission Coefficient                        |
| RS                     | Series Resistance                           |
| IKF                    | High-injection Knee Current                 |
| CJO                    | Zero-bias Junction Capacitance              |
| M                      | Junction Grading Coefficient                |
| VJ                     | Junction Potential                          |
| ISR                    | Recombination Current Saturation Value      |
| BV                     | Reverse Breakdown Voltage(a positive value) |
| IBV                    | Reverse Breakdown Current(a positive value) |
| TT                     | Transit Time                                |
| EG                     | Energy-band Gap                             |

## Forward Current Characteristic

Circuit Simulation Result

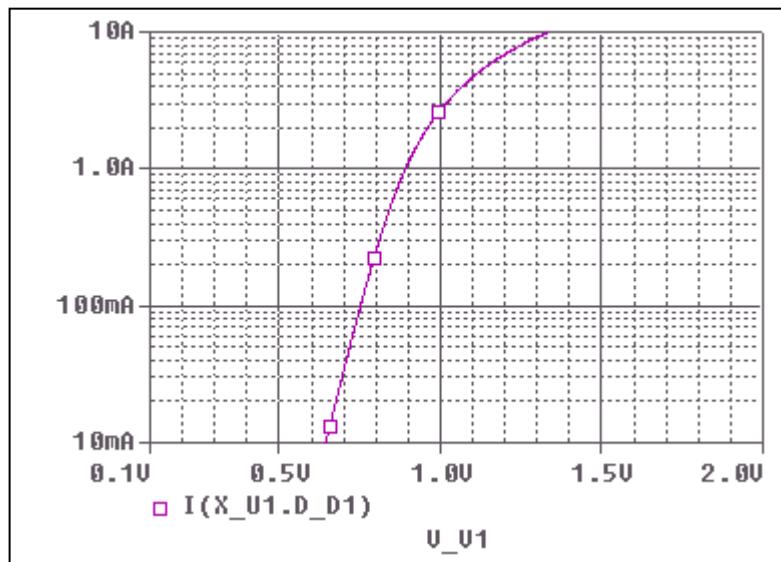


Evaluation Circuit

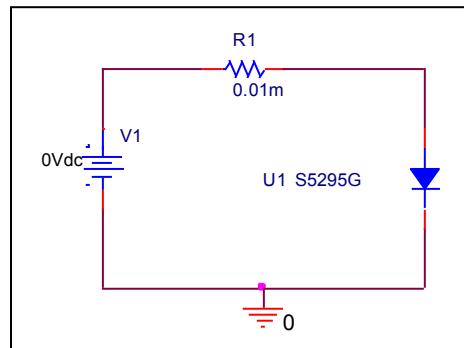

## Comparison Graph

### Circuit Simulation Result

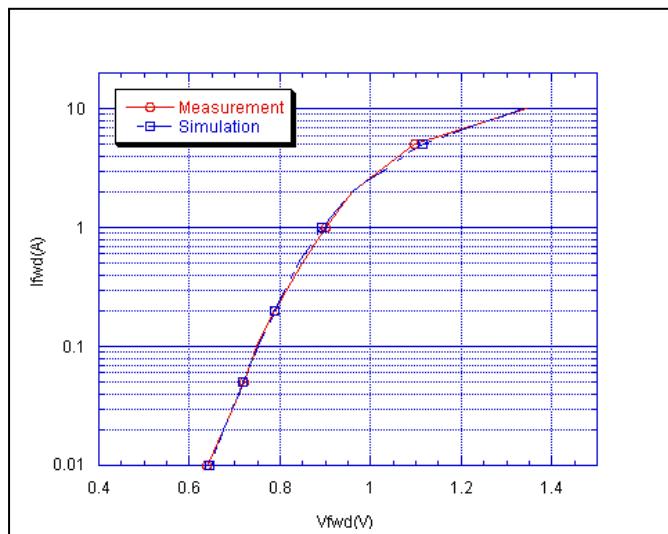


### Simulation Result


| Ifwd(A) | Vfwd(V)<br>Measurement | Vfwd(V)<br>Simulation | %Error |
|---------|------------------------|-----------------------|--------|
| 0.01    | 0.640                  | 0.644                 | -0.609 |
| 0.02    | 0.675                  | 0.676                 | -0.163 |
| 0.05    | 0.722                  | 0.719                 | 0.429  |
| 0.1     | 0.750                  | 0.752                 | -0.320 |
| 0.2     | 0.788                  | 0.789                 | -0.102 |
| 0.5     | 0.850                  | 0.841                 | 1.059  |
| 1       | 0.900                  | 0.891                 | 1.000  |
| 2       | 0.958                  | 0.961                 | -0.282 |
| 5       | 1.096                  | 1.115                 | -1.770 |
| 10      | 1.344                  | 1.334                 | 0.751  |

## Junction Capacitance Characteristic

### Circuit Simulation Result

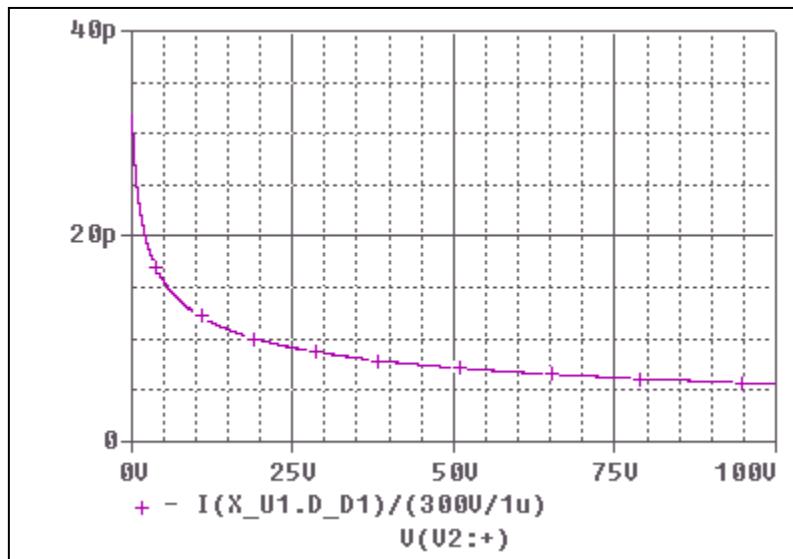


### Evaluation Circuit

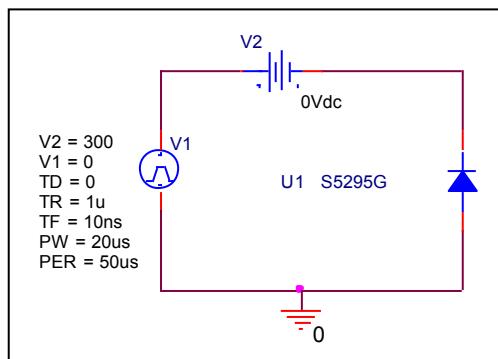

## Comparison Graph

### Circuit Simulation Result

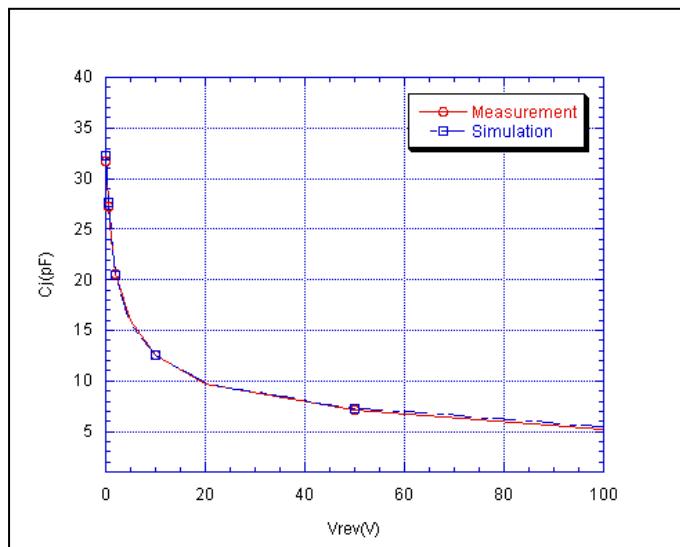


### Simulation Result


| $V_{rev}(V)$ | $C_j(pF)$<br>Measurement | $C_j(pF)$<br>Simulation | %Error |
|--------------|--------------------------|-------------------------|--------|
| 0            | 33.743                   | 33.743                  | 0.000  |
| 0.1          | 31.722                   | 32.242                  | -1.639 |
| 0.2          | 30.298                   | 30.769                  | -1.555 |
| 0.5          | 27.184                   | 27.588                  | -1.486 |
| 1            | 24.135                   | 24.238                  | -0.427 |
| 2            | 20.581                   | 20.503                  | 0.379  |
| 5            | 15.931                   | 15.656                  | 1.726  |
| 10           | 12.581                   | 12.504                  | 0.612  |
| 20           | 9.744                    | 9.897                   | -1.567 |
| 50           | 7.112                    | 7.212                   | -1.412 |
| 100          | 5.058                    | 5.280                   | -4.407 |

## Reverse Recovery Characteristic

### Circuit Simulation Result

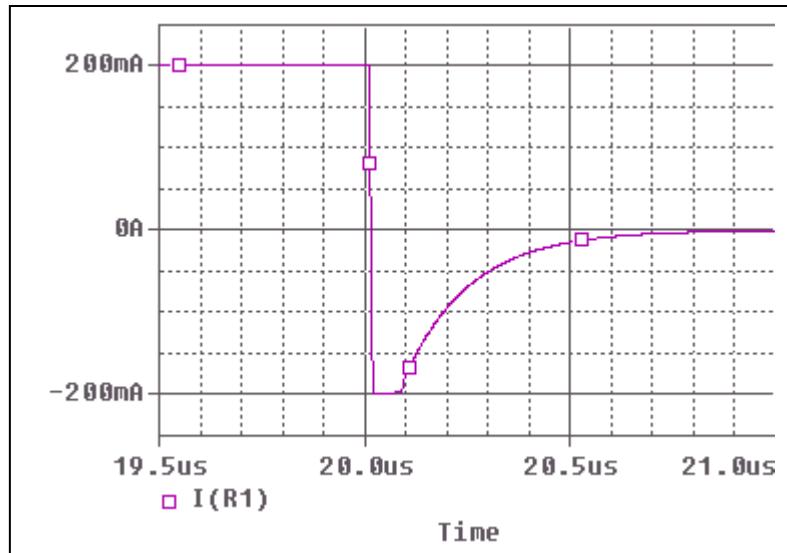

### Evaluation Circuit

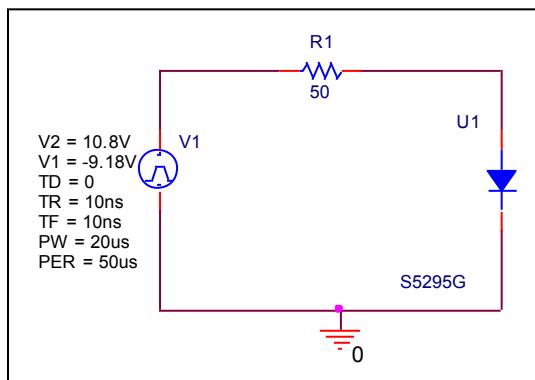


### Compare Measurement vs. Simulation

|     | Measurement |    | Simulation |    | %Error |
|-----|-------------|----|------------|----|--------|
| trj | 74.0        | ns | 74.3       | ns | 0.405  |
| trb | 364         | ns | 362.7      | ns | 0.357  |

## Reverse Recovery Characteristic


## Reference

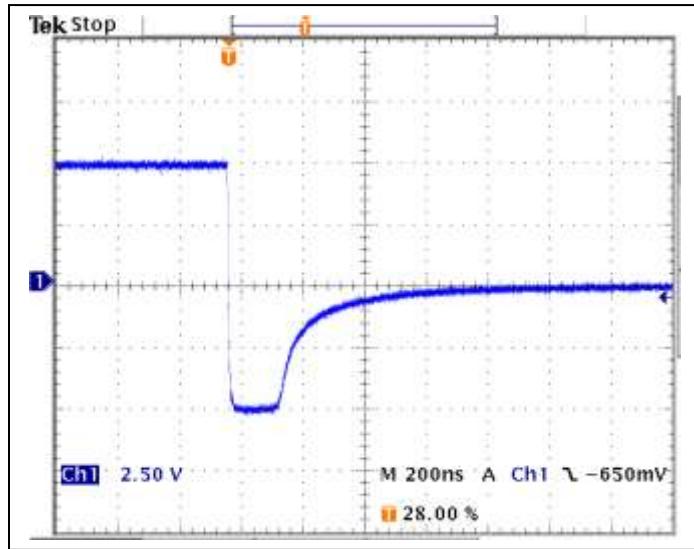

$Trj = 76(\text{ns})$

$Trb = 364(\text{ns})$

Conditions:  $I_{fwd} = 0.2(\text{A})$ ,  $I_{rev} = 0.2(\text{A})$ ,  $R_I = 50$

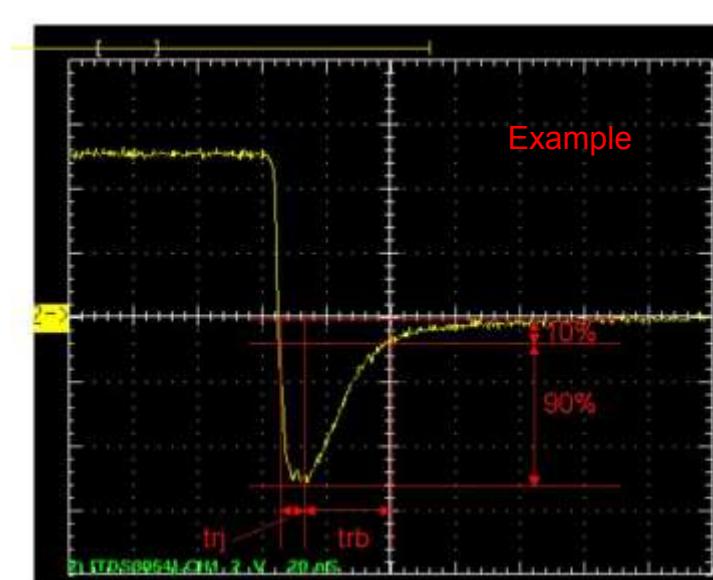

Relation between  $trj$  and  $trb$