

# **Device Modeling Report**

COMPONENTS: Laser Diode

PART NUMBER: ML7924

MANUFACTURER: MITSUBISHI




**Bee Technologies Inc.**


PSpice model parameter	Model description
IS	Saturation Current
N	Emission Coefficient
RS	Series Resistance
IKF	High-injection Knee Current
CJO	Zero-bias Junction Capacitance
M	Junction Grading Coefficient
VJ	Junction Potential
ISR	Recombination Current Saturation Value
BV	Reverse Breakdown Voltage(a positive value)
IBV	Reverse Breakdown Current(a positive value)
TT	Transit Time

## Optical Output Power vs. Forward current characteristics

Circuit simulation result

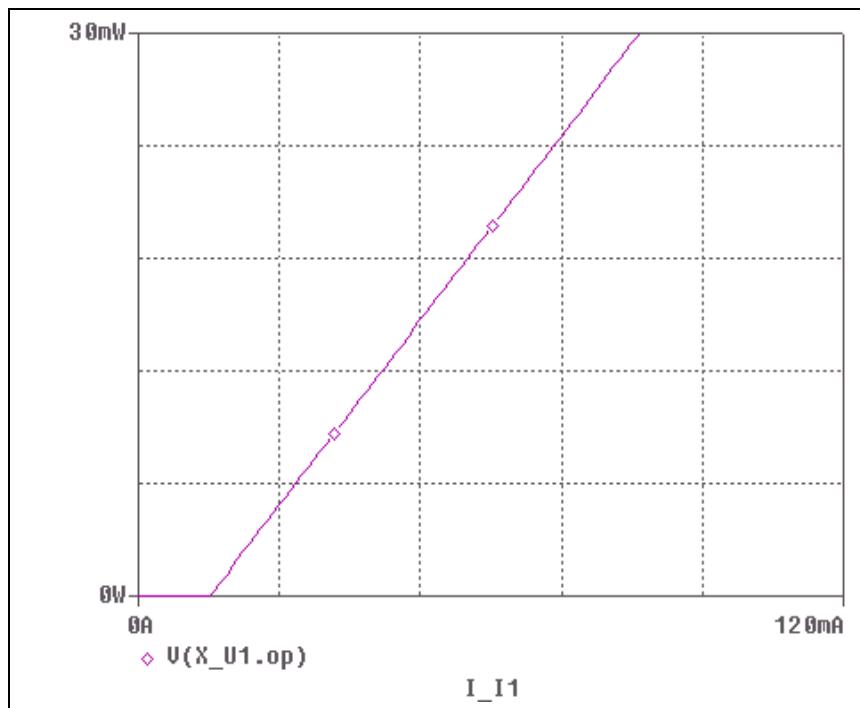


Evaluation circuit

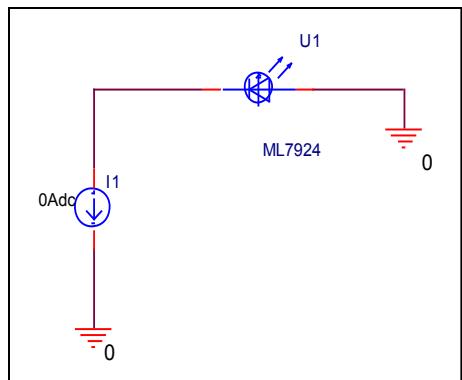

# Comparison graph

Circuit simulation result

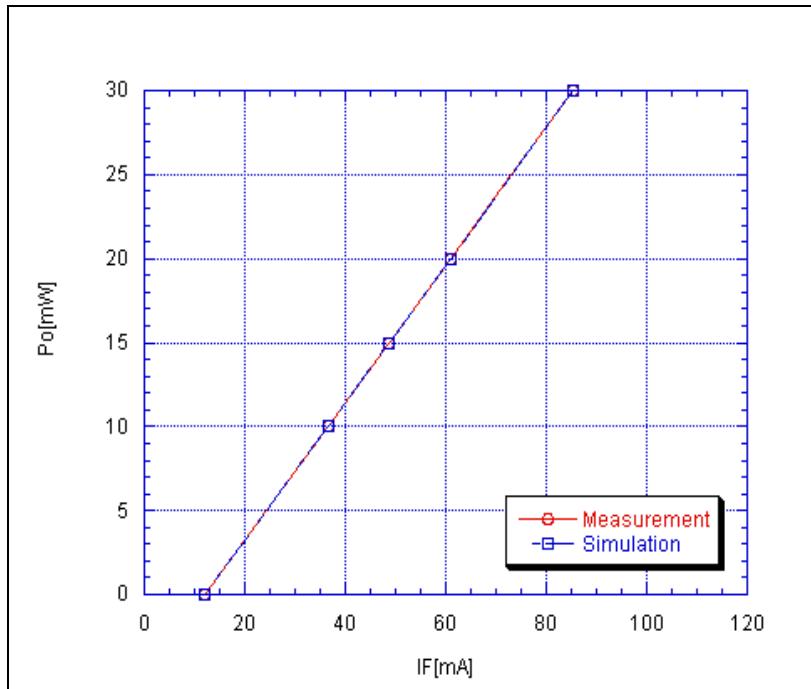

Simulation Result

Po[mW]	IF[mA]		Error (%)
	Measurement	Simulation	
0	11.91	11.918	0.0671
5	24.333	24.345	0.0493
10	36.542	36.54	0.0054
15	48.735	48.734	0.0020
20	60.929	60.929	0.0016
15	73.125	73.123	0.0027
30	85.318	85.318	0