

# **Device Modeling Report**

**COMPONENTS:**

DIODE/ SCHOTTKY RECTIFIER / STANDARD

PART NUMBER: 1SS394

MANUFACTURER: TOSHIBA




**Bee Technologies Inc.**


| PSpice model parameter | Model description                           |
|------------------------|---|
| IS                     | Saturation Current                          |
| N                      | Emission Coefficient                        |
| RS                     | Series Resistance                           |
| IKF                    | High-injection Knee Current                 |
| CJO                    | Zero-bias Junction Capacitance              |
| M                      | Junction Grading Coefficient                |
| VJ                     | Junction Potential                          |
| ISR                    | Recombination Current Saturation Value      |
| BV                     | Reverse Breakdown Voltage(a positive value) |
| IBV                    | Reverse Breakdown Current(a positive value) |
| TT                     | Transit Time                                |
| EG                     | Energy-band Gap                             |

## Forward Current Characteristic

Circuit Simulation Result

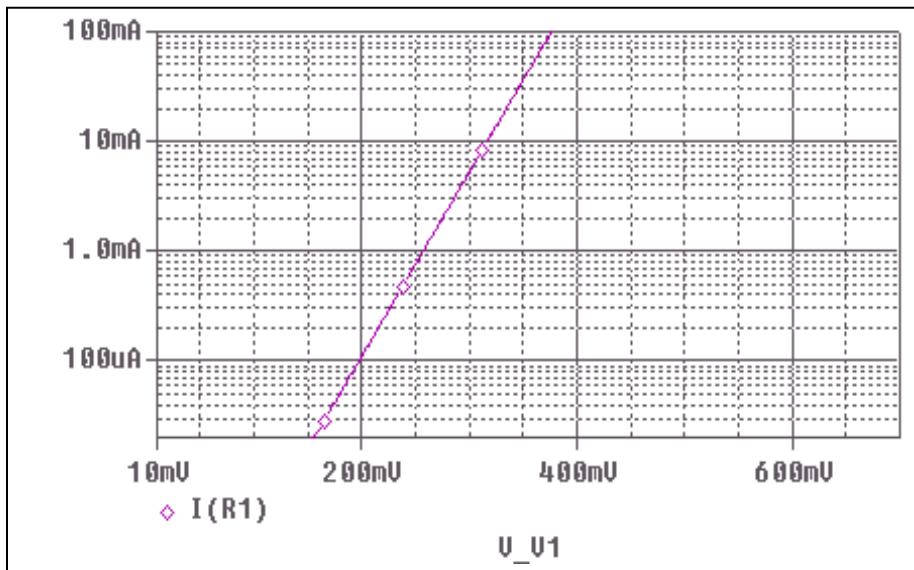


Evaluation Circuit

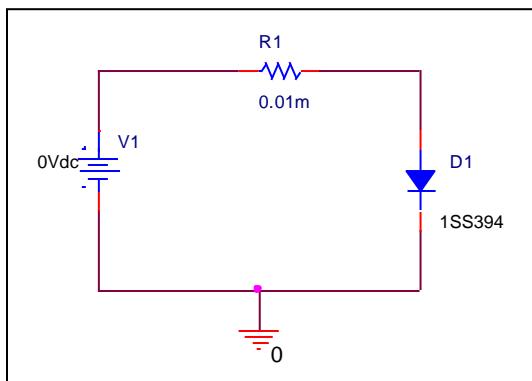

## Comparison Graph

Circuit Simulation Result

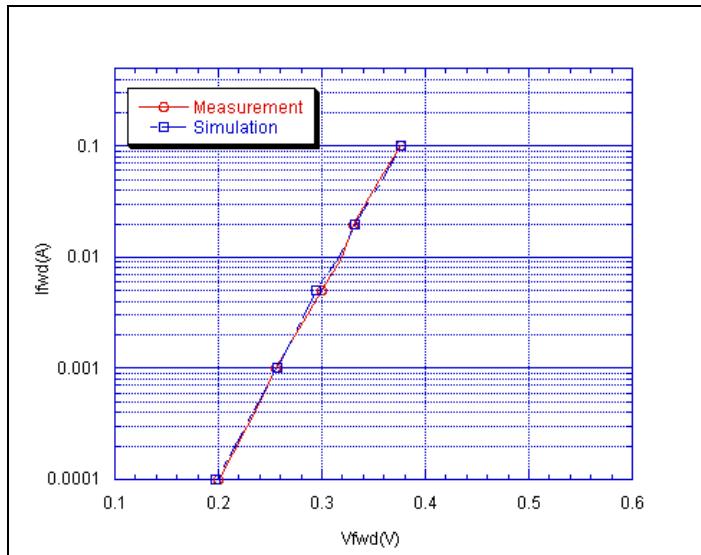


Simulation Result


| $I_{fwd}$ (A) | $V_{fwd}$ (V)<br>Measurement | $V_{fwd}$ (V)<br>Simulation | %Error |
|---------------|------------------------------|-----------------------------|--------|
| 0.00002       | 0.160                        | 0.156                       | -2.56  |
| 0.00005       | 0.178                        | 0.180                       | 0.90   |
| 0.0001        | 0.200                        | 0.198                       | -1.25  |
| 0.0005        | 0.240                        | 0.239                       | -0.37  |
| 0.001         | 0.255                        | 0.257                       | 0.82   |
| 0.005         | 0.300                        | 0.295                       | -1.67  |
| 0.01          | 0.320                        | 0.317                       | -0.97  |
| 0.02          | 0.330                        | 0.332                       | 0.61   |
| 0.05          | 0.355                        | 0.358                       | 0.90   |
| 0.1           | 0.376                        | 0.376                       | 0.05   |

## Junction Capacitance Characteristic

Circuit Simulation Result

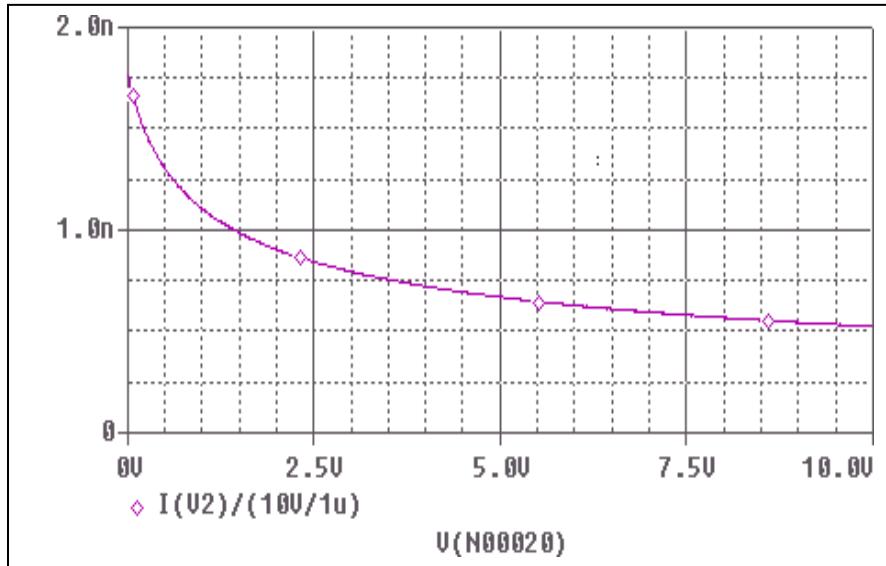


Evaluation Circuit

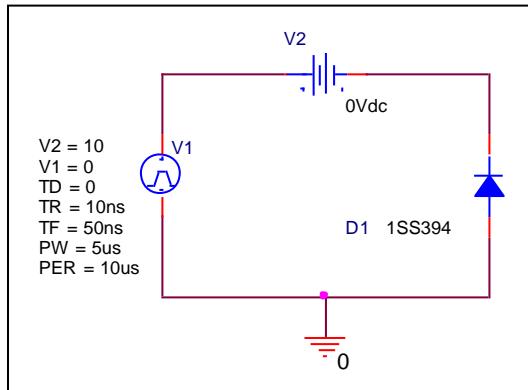

## Comparison Graph

Circuit Simulation Result

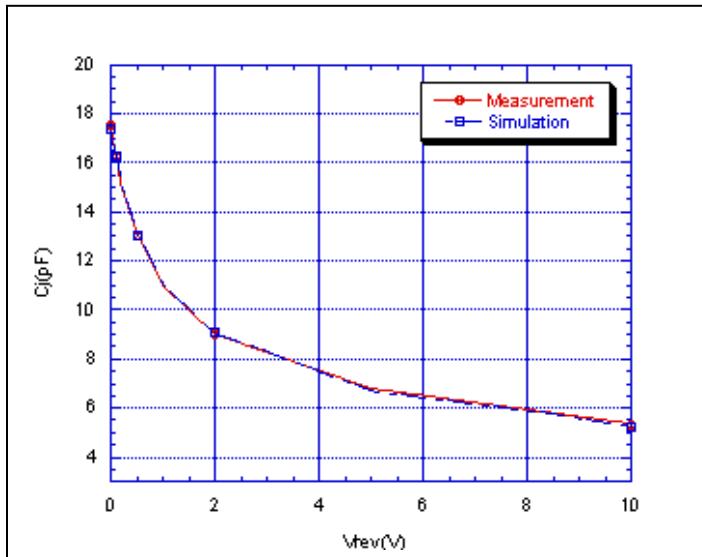

Simulation Result

| $V_{rev}(V)$ | $C_j(pF)$<br>Measurement | $C_j(pF)$<br>Simulation | %Error |
|--------------|--------------------------|-------------------------|--------|
| 0.02         | 17.500                   | 17.334                  | -0.95  |
| 0.05         | 17.000                   | 16.964                  | -0.21  |
| 0.1          | 16.300                   | 16.295                  | -0.03  |
| 0.2          | 15.200                   | 15.223                  | 0.15   |
| 0.5          | 13.000                   | 13.036                  | 0.28   |
| 1            | 11.000                   | 11.040                  | 0.36   |
| 2            | 9.000                    | 9.070                   | 0.78   |
| 5            | 6.800                    | 6.685                   | -1.69  |
| 10           | 5.300                    | 5.258                   | -0.79  |