

Device Modeling Report

COMPONENTS: Laser Diode
PART NUMBER: DL-3147-021
MANUFACTURER: SANYO




Bee Technologies Inc.


| PSpice model parameter | Model description |
|------------------------|---|
| IS | Saturation Current |
| N | Emission Coefficient |
| RS | Series Resistance |
| IKF | High-injection Knee Current |
| CJO | Zero-bias Junction Capacitance |
| M | Junction Grading Coefficient |
| VJ | Junction Potential |
| ISR | Recombination Current Saturation Value |
| BV | Reverse Breakdown Voltage(a positive value) |
| IBV | Reverse Breakdown Current(a positive value) |
| TT | Transit Time |

Optical Output Power vs. Forward current characteristics

Circuit simulation result

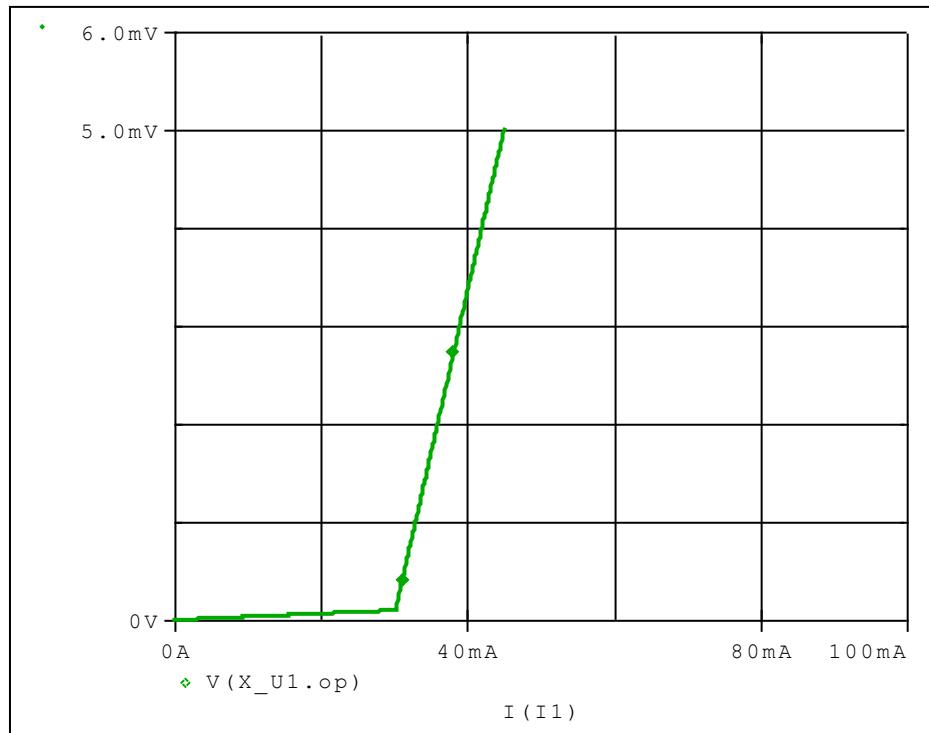


Evaluation circuit

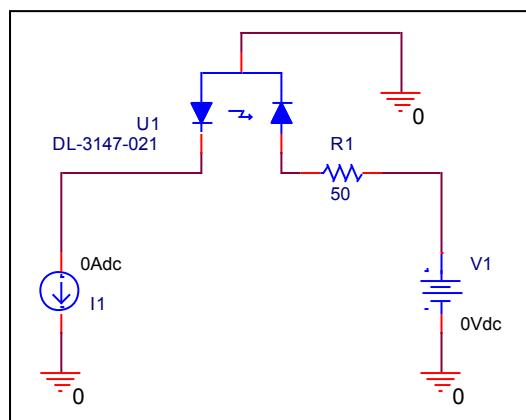

Comparison graph

Circuit simulation result

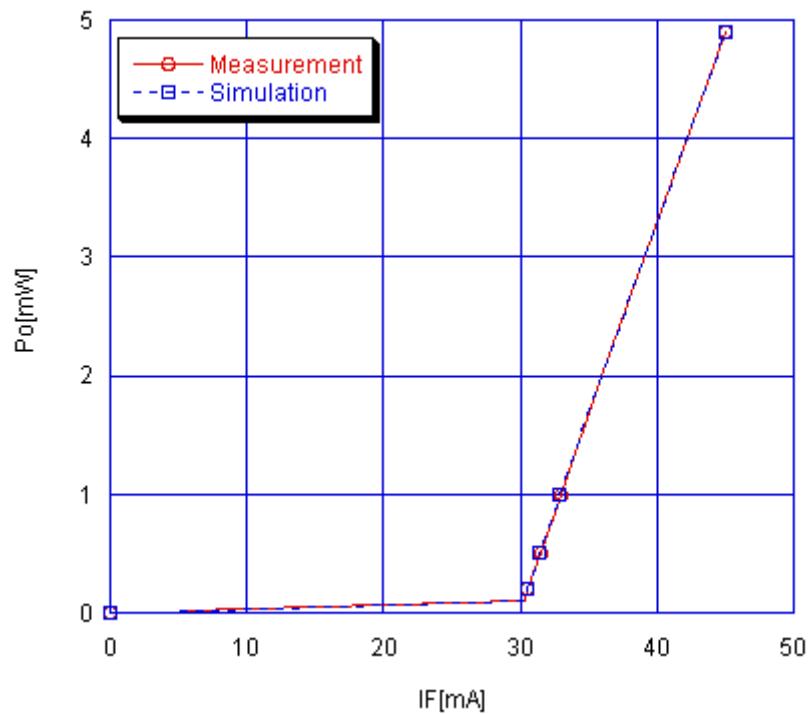


Simulation Result


| Po[mW] | IF[mA] | | Error (%) |
|--------|-------------|------------|-----------|
| | Measurement | Simulation | |
| 0.100 | 30.300 | 30.200 | 0.330 |
| 0.200 | 30.450 | 30.500 | 0.164 |
| 0.500 | 31.500 | 31.400 | 0.317 |
| 1.000 | 33.000 | 32.900 | 0.303 |
| 2.000 | 36.000 | 35.900 | 0.278 |
| 4.900 | 45.000 | 45.000 | 0.000 |

Monitor Current vs. Optical Output Power characteristics

Circuit simulation result

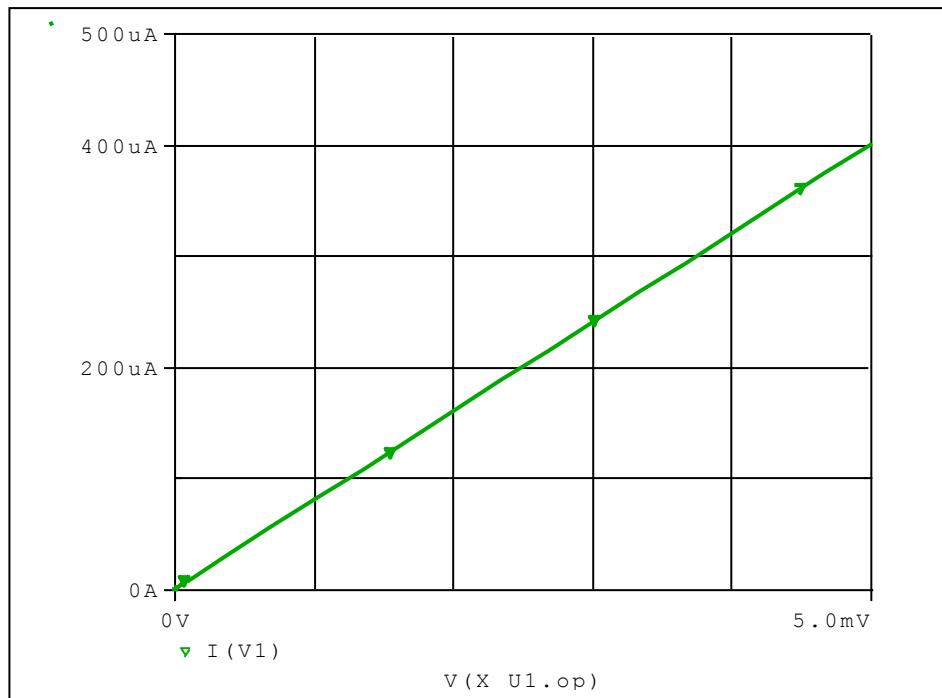


Evaluation circuit

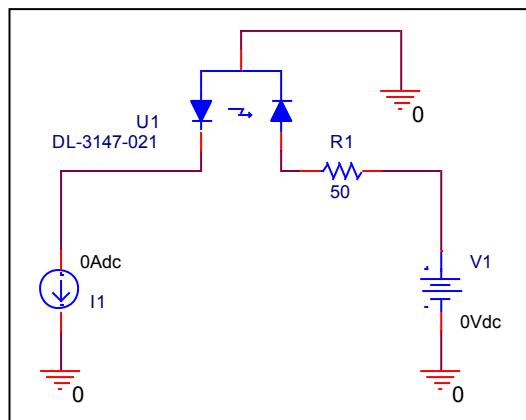

Comparison graph

Circuit simulation result

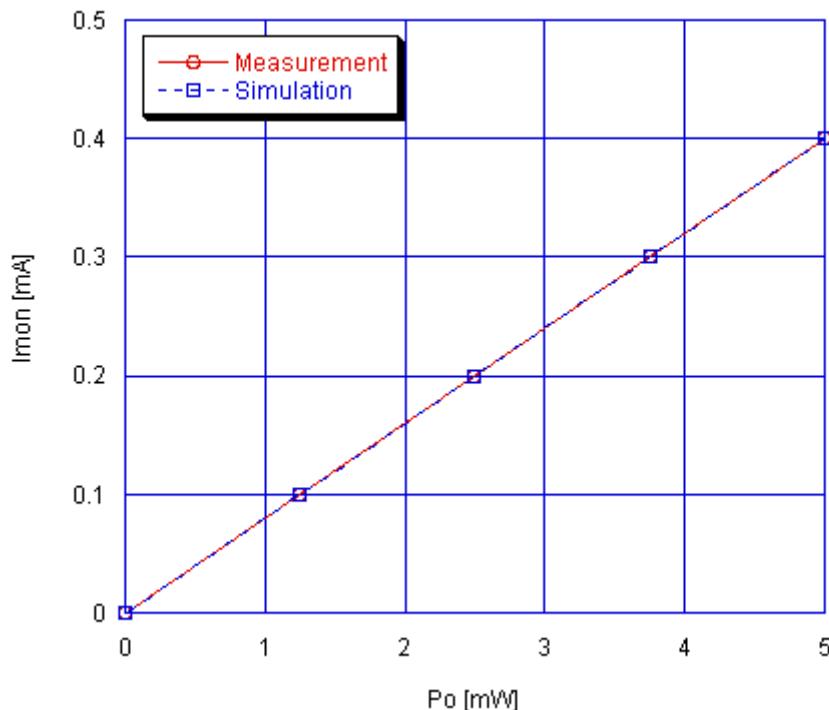

Simulation Result

| I_{mon} [mA] | P_o [mW] | | Error (%) |
|----------------|-------------|------------|-----------|
| | Measurement | Simulation | |
| 0.100 | 1.250 | 1.250 | 0.000 |
| 0.200 | 2.500 | 2.500 | 0.000 |
| 0.300 | 3.750 | 3.750 | 0.000 |
| 0.400 | 5.000 | 5.000 | 0.000 |