

Device Modeling Report

COMPONENTS: Power MOSFET (Professional)
PART NUMBER: 2SK3110
MANUFACTURER: NEC
Body Diode (Professional) / ESD Protection Diode




Bee Technologies Inc.

MOSFET MODEL

PSpice model parameter	Model description
LEVEL	
L	Channel Length
W	Channel Width
KP	Transconductance
RS	Source Ohmic Resistance
RD	Ohmic Drain Resistance
VTO	Zero-bias Threshold Voltage
RDS	Drain-Source Shunt Resistance
TOX	Gate Oxide Thickness
CGSO	Zero-bias Gate-Source Capacitance
CGDO	Zero-bias Gate-Drain Capacitance
CBD	Zero-bias Bulk-Drain Junction Capacitance
MJ	Bulk Junction Grading Coefficient
PB	Bulk Junction Potential
FC	Bulk Junction Forward-bias Capacitance Coefficient
RG	Gate Ohmic Resistance
IS	Bulk Junction Saturation Current
N	Bulk Junction Emission Coefficient
RB	Bulk Series Resistance
PHI	Surface Inversion Potential
GAMMA	Body-effect Parameter
DELTA	Width effect on Threshold Voltage
ETA	Static Feedback on Threshold Voltage
THETA	Mobility Modulation
KAPPA	Saturation Field Factor
VMAX	Maximum Drift Velocity of Carriers
XJ	Metallurgical Junction Depth
UO	Surface Mobility

Transconductance Characteristic

Circuit Simulation Result

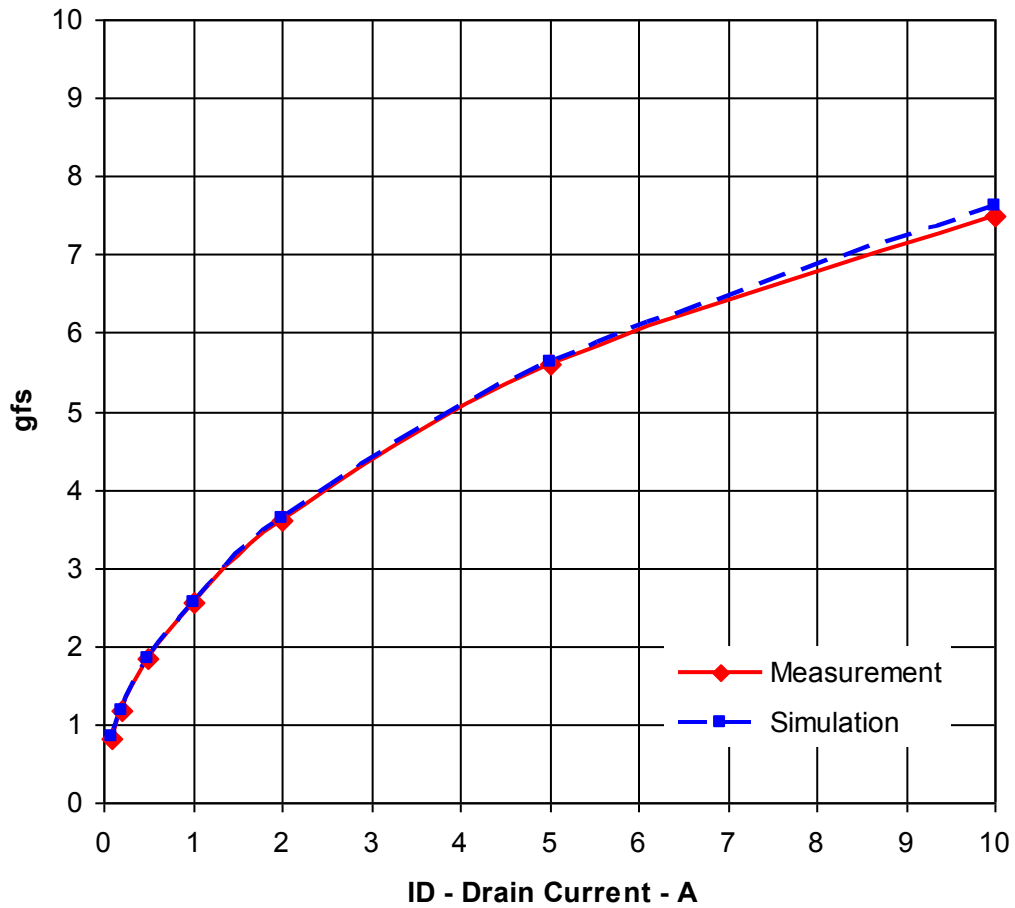


Comparison table


Id(A)	gfs		Error(%)
	Measurement	Simulation	
0.1	0.830	0.833	0.361
0.2	1.175	1.176	0.085
0.5	1.850	1.852	0.108
1	2.550	2.564	0.549
2	3.600	3.621	0.583
5	5.600	5.618	0.321
10	7.500	7.634	1.787

V_{gs}-I_d Characteristic

Circuit Simulation result

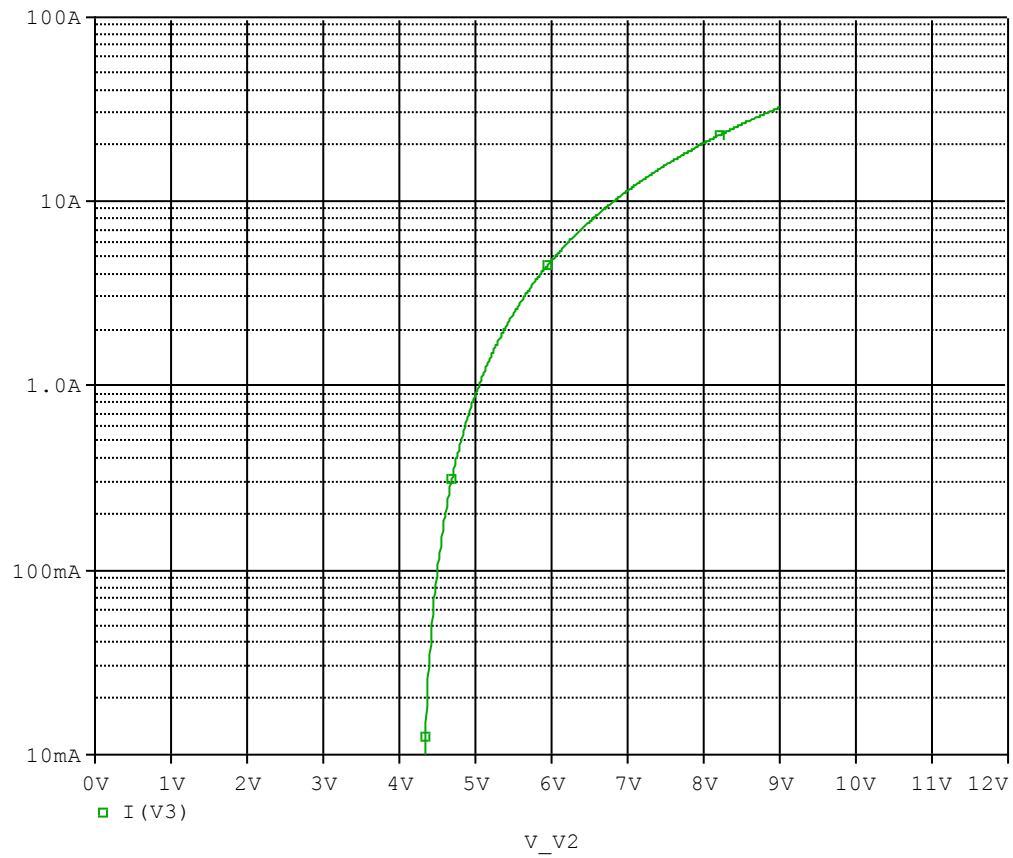


Evaluation circuit

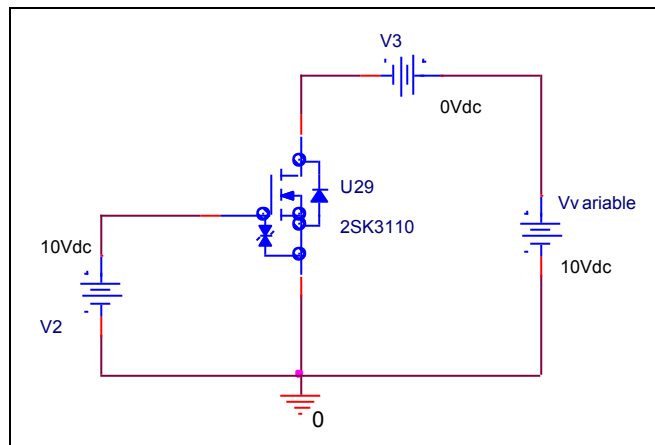

Comparison Graph

Circuit Simulation Result

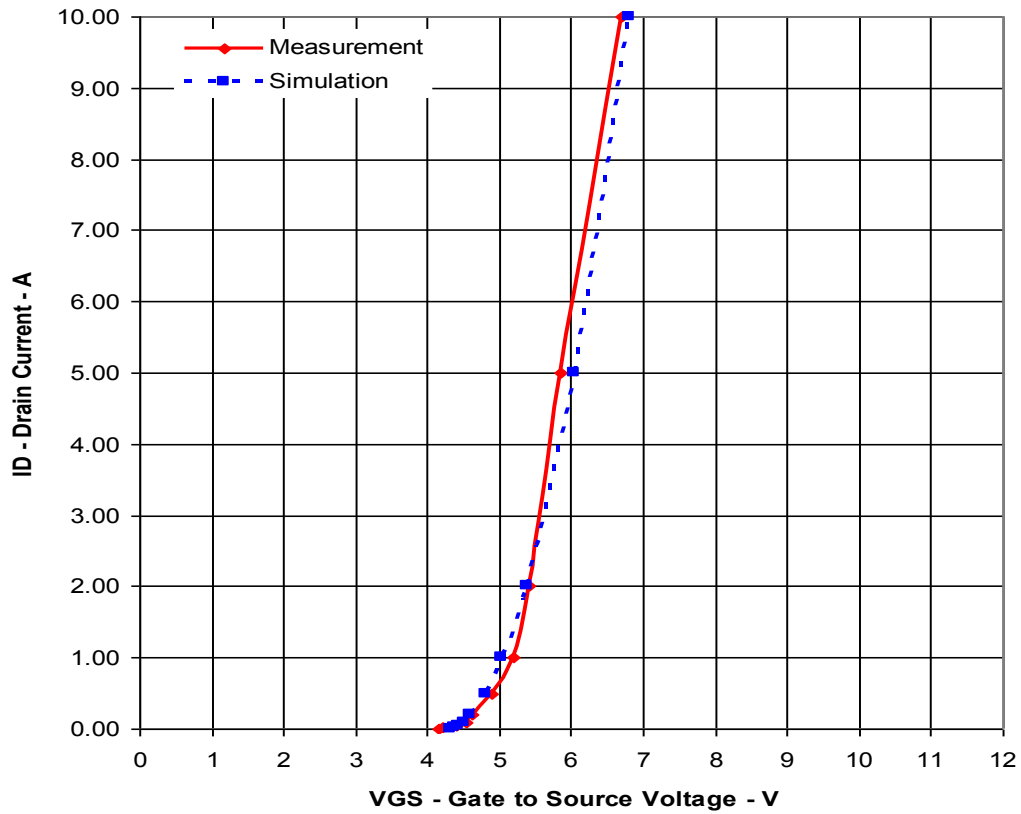


Simulation Result


ID(A)	V _{GS} (V)		Error (%)
	Measurement	Simulation	
0.01	4.150	4.330	4.337
0.02	4.200	4.364	3.905
0.05	4.400	4.428	0.636
0.1	4.550	4.501	-1.077
0.2	4.610	4.604	-0.130
0.5	4.900	4.809	-1.857
1	5.200	5.042	-3.038
2	5.400	5.374	-0.481
5	5.850	6.044	3.316
10	6.700	6.815	1.716

Rds(on) Characteristic

Circuit Simulation result

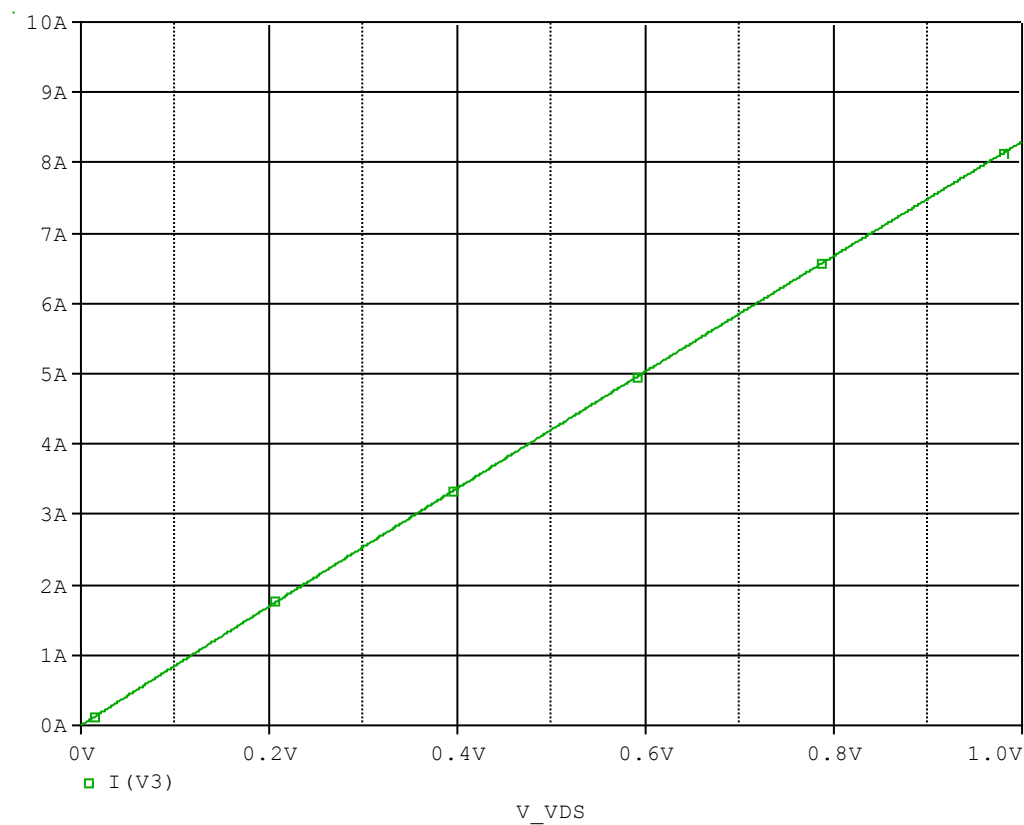

Evaluation circuit

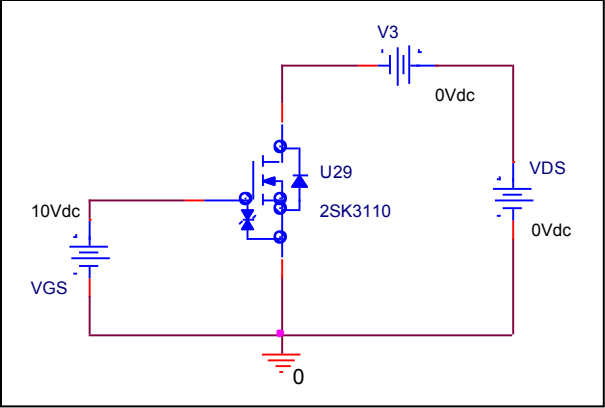


Simulation Result


$I_D=7A, V_{GS}=10V$	Measurement	Simulation	Error (%)
$R_{DS(on)}$	0.120	0.120	0.000

Gate Charge Characteristic

Circuit Simulation result

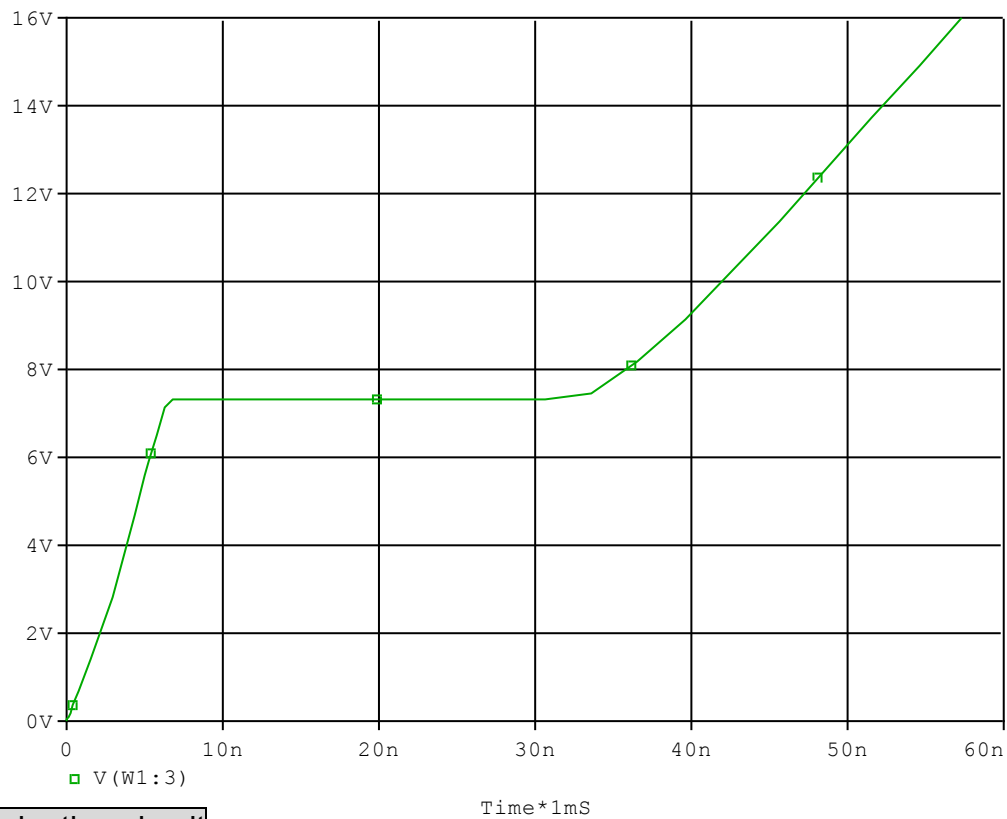

Evaluation circuit

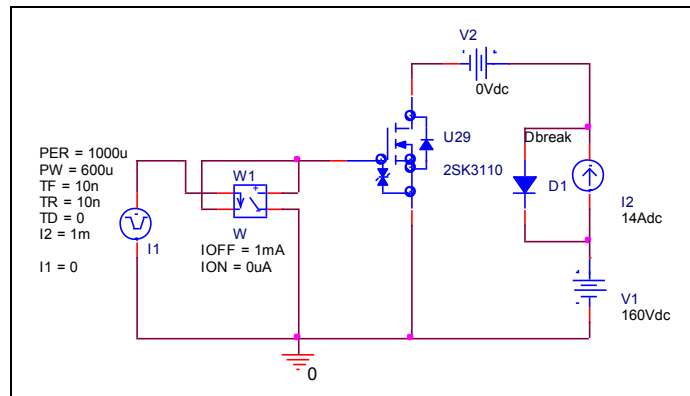


Simulation Result


$V_{DD}=160V, I_D=14A$ $V_{GS}=10V$	Measurement	Simulation	Error (%)
$Q_{gs}(nC)$	7.000	7.051	0.729
$Q_{gd}(nC)$	25.000	25.000	0.000
Q_g	42.000	41.923	-0.183

Switching Time Characteristic

Circuit Simulation result

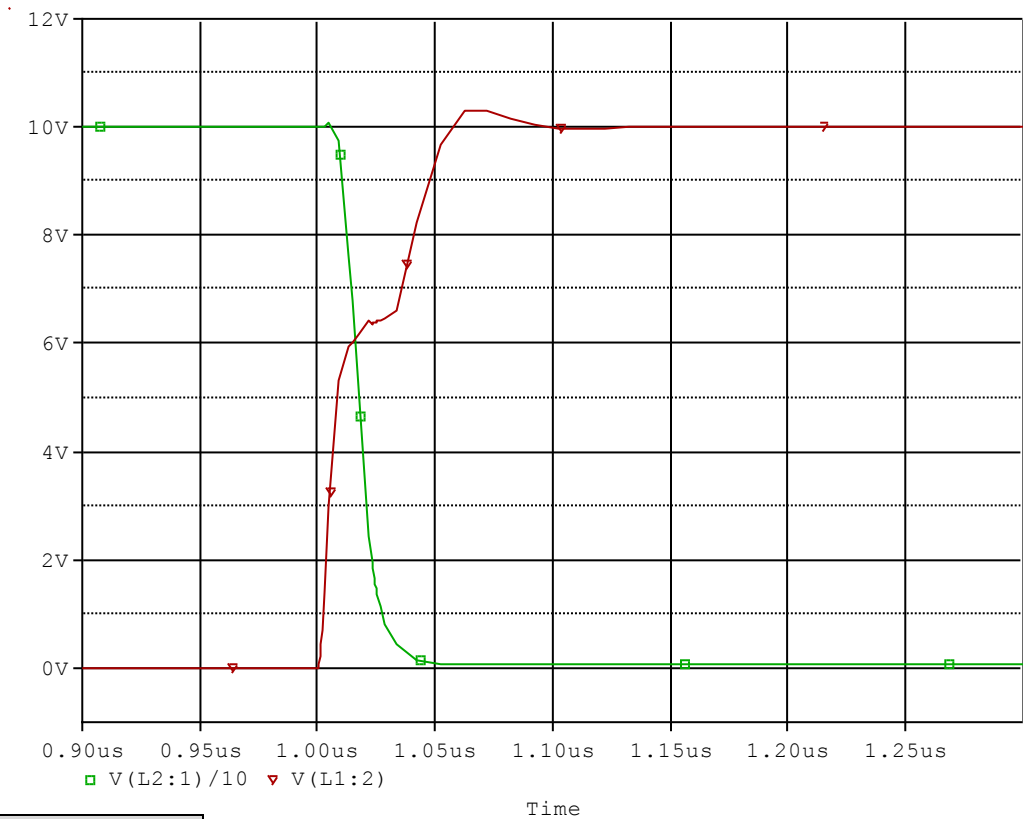

Evaluation circuit

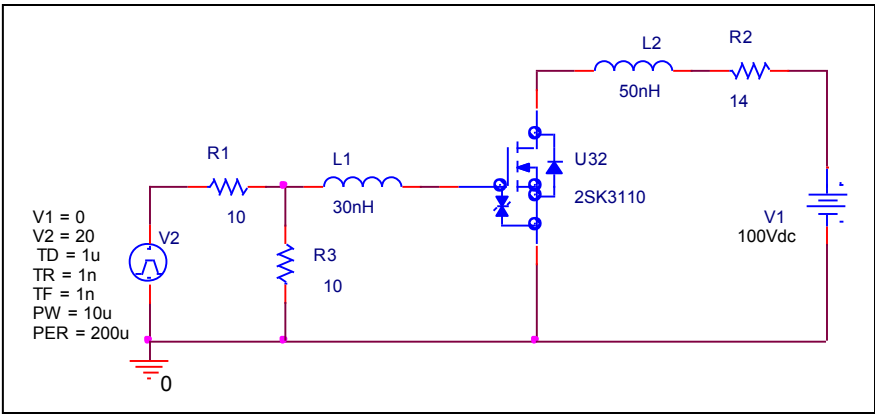


Simulation Result


$I_D=40\text{ A}$, $V_{DD}=30\text{ V}$ $V_{GS}=0/10\text{ V}$	Measurement	Simulation	Error(%)
Ton(ns)	25.000	25.005	0.020

Output Characteristic

Circuit Simulation result

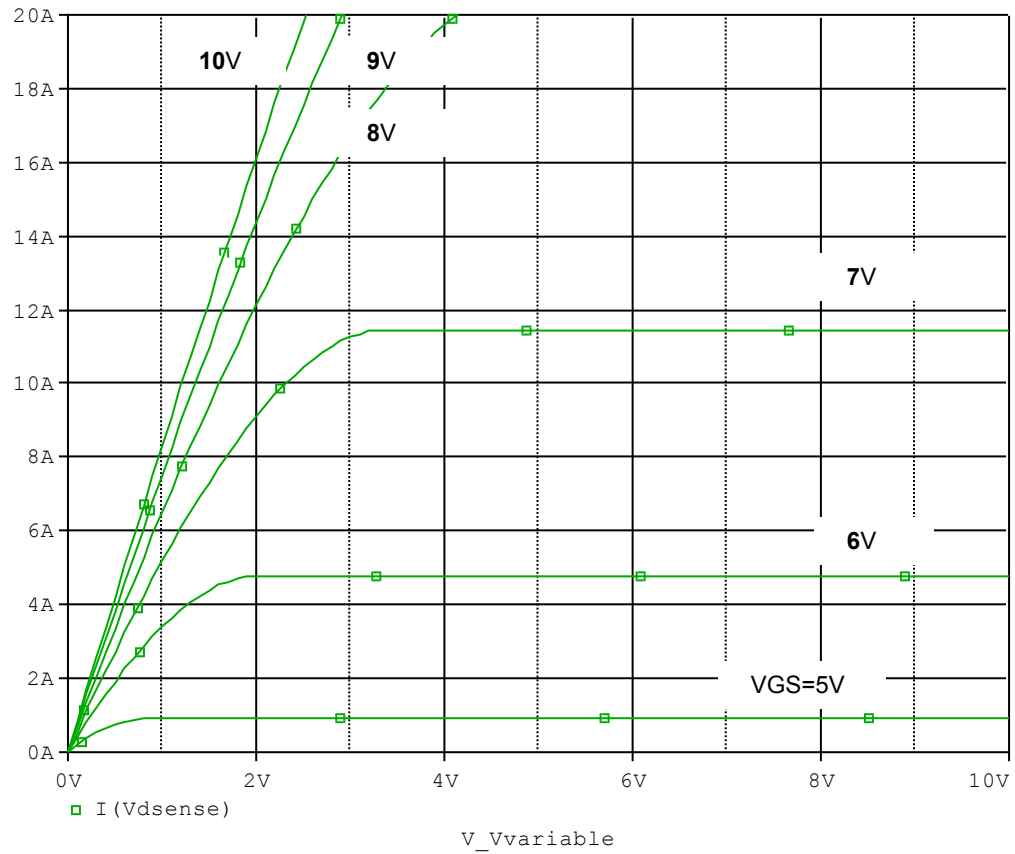


Evaluation circuit

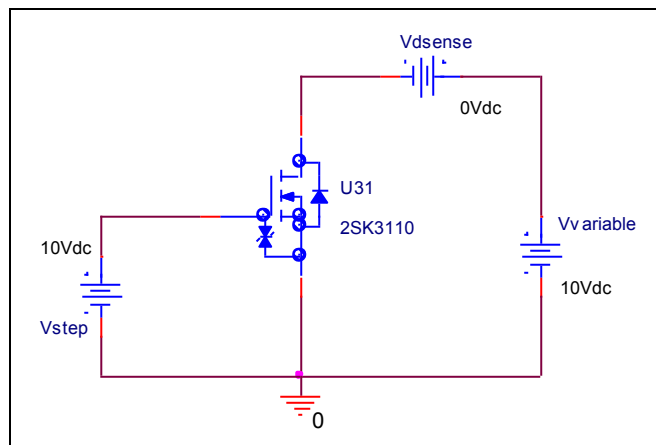


Output Characteristic

Reference

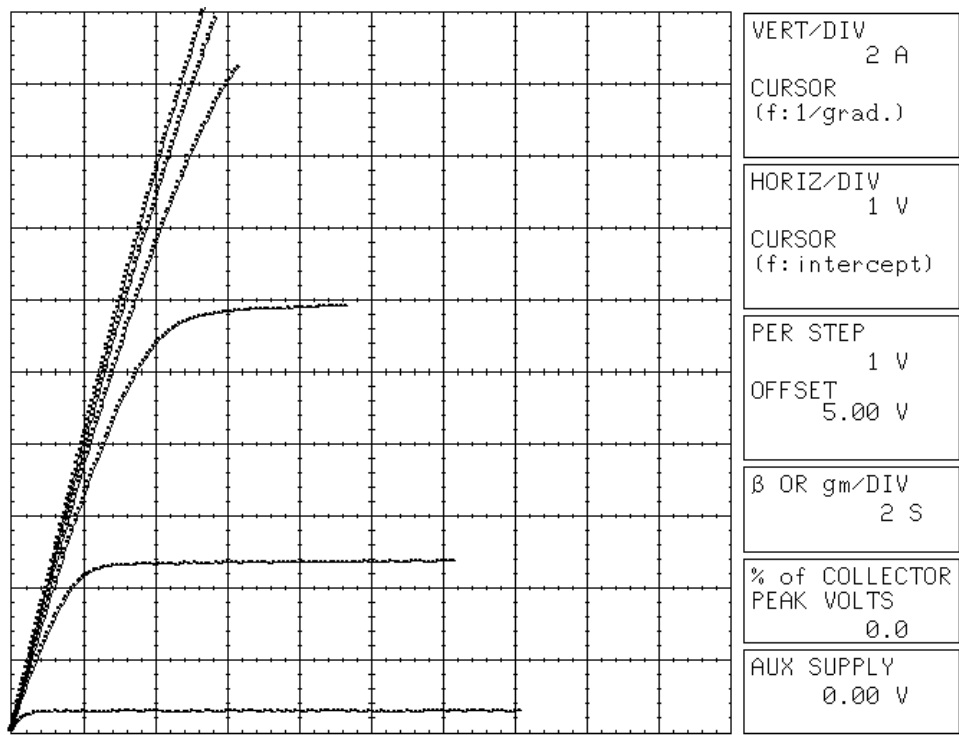


Forward Current Characteristic

Circuit Simulation Result

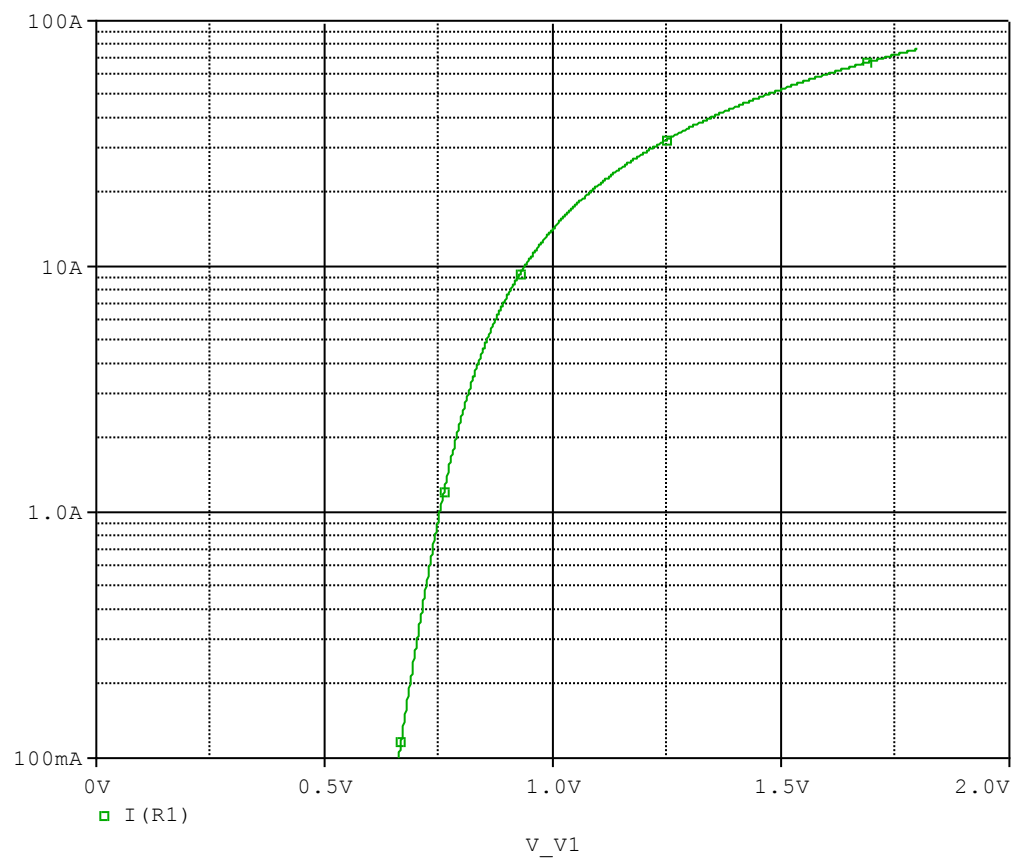


Evaluation Circuit

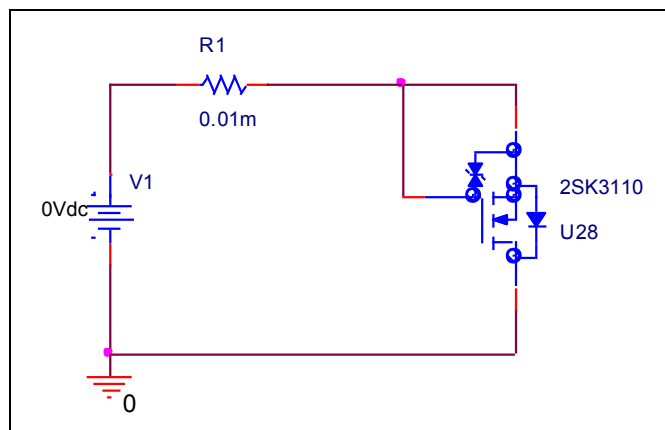

Comparison Graph

Circuit Simulation Result

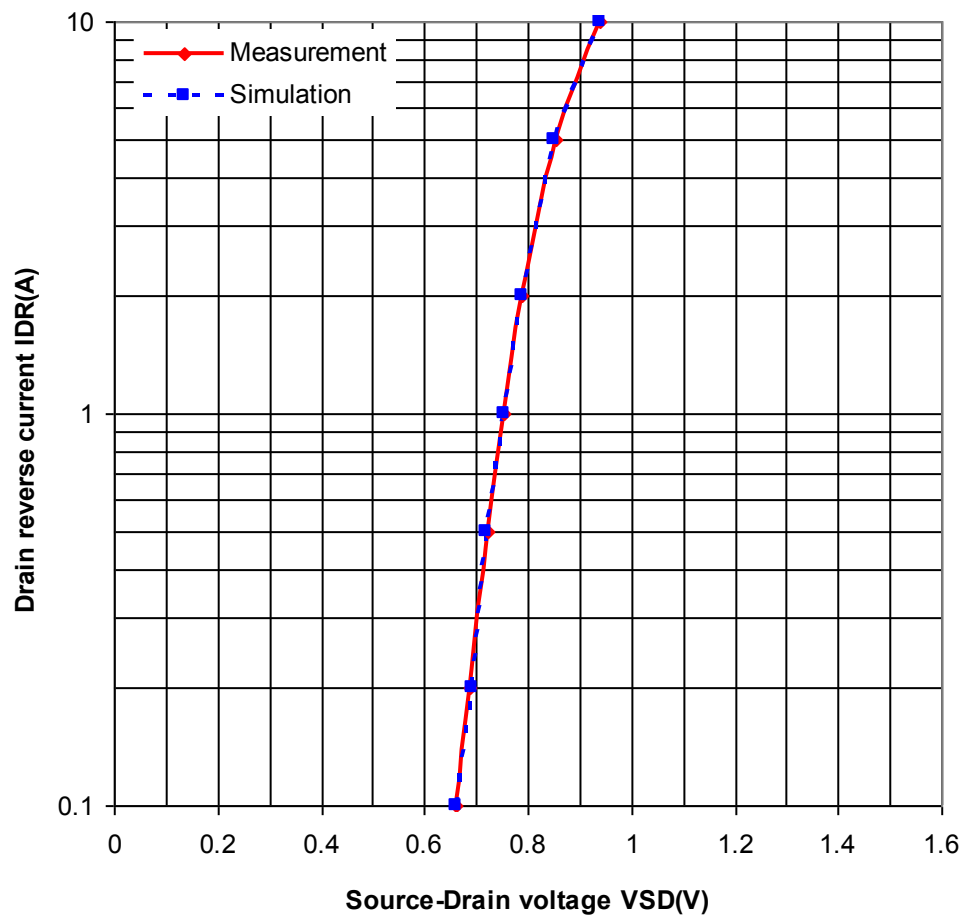


Simulation Result


IDR(A)	VSD(V)		%Error
	Measuremen	Simulation	
0.1	0.662	0.660	-0.302
0.2	0.687	0.690	0.437
0.5	0.721	0.720	-0.139
1	0.752	0.755	0.399
2	0.787	0.790	0.381
5	0.855	0.850	-0.585
10	0.938	0.940	0.213

Reverse Recovery Characteristic

Circuit Simulation Result

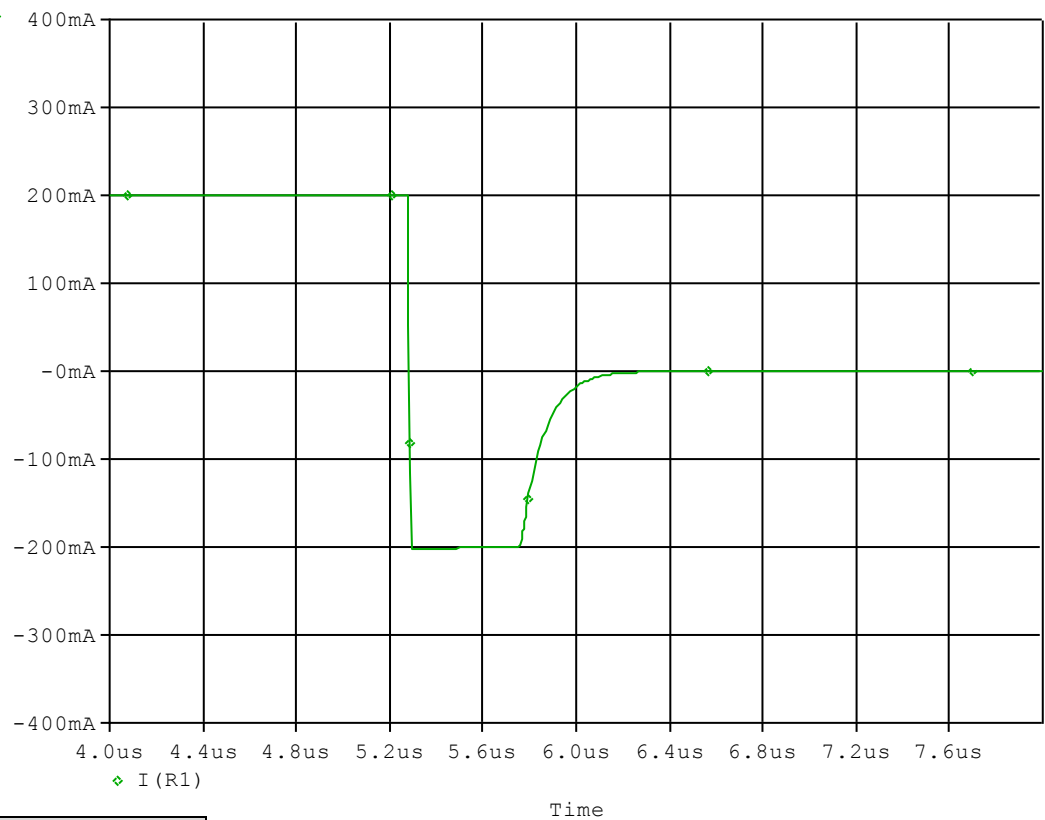

Evaluation Circuit

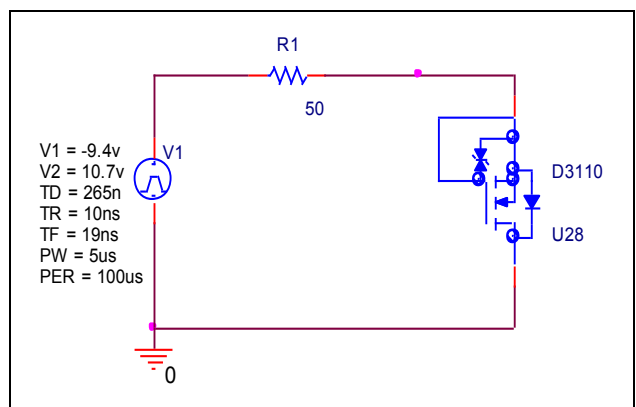


Compare Measurement vs. Simulation

	Measurement	Simulation	Error (%)
Trj(ns)	480	479.234	-0.160
Trb(ns)	220	219.906	-0.043
Trr(ns)	700	699.140	-0.123

Reverse Recovery Characteristic


Reference

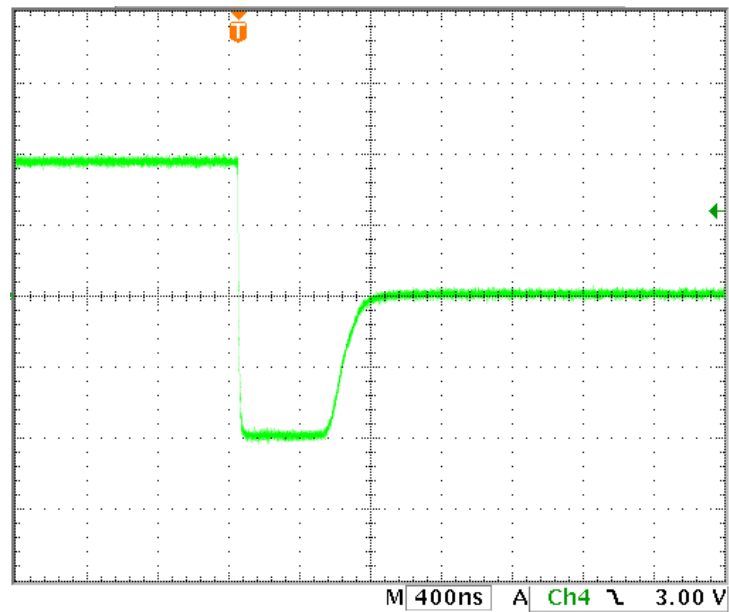

$T_{rr}=480.00(\text{ns})$

$T_{rb}=220.000(\text{ns})$


Conditions: $I_{fwd}=I_{rev}=0.2(\text{A})$, $R_I=50$

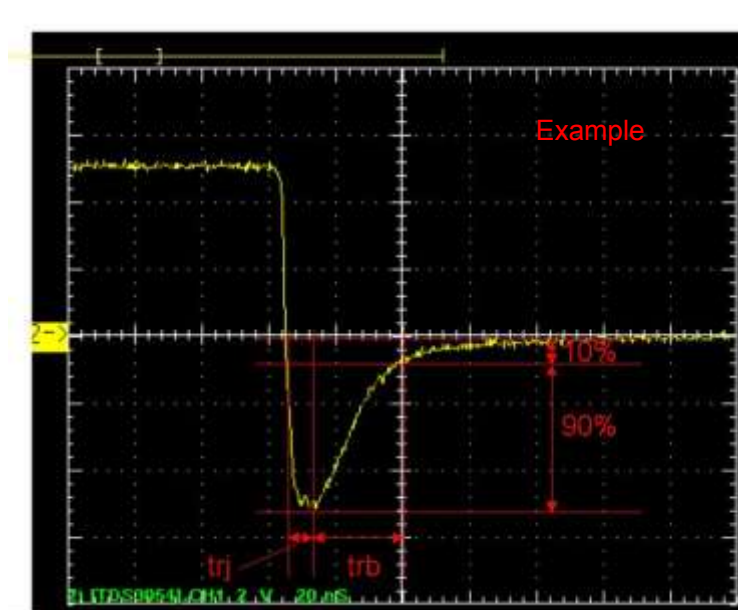


Relation between t_{rr} and t_{rb}

Zener Voltage Characteristic

Circuit Simulation Result

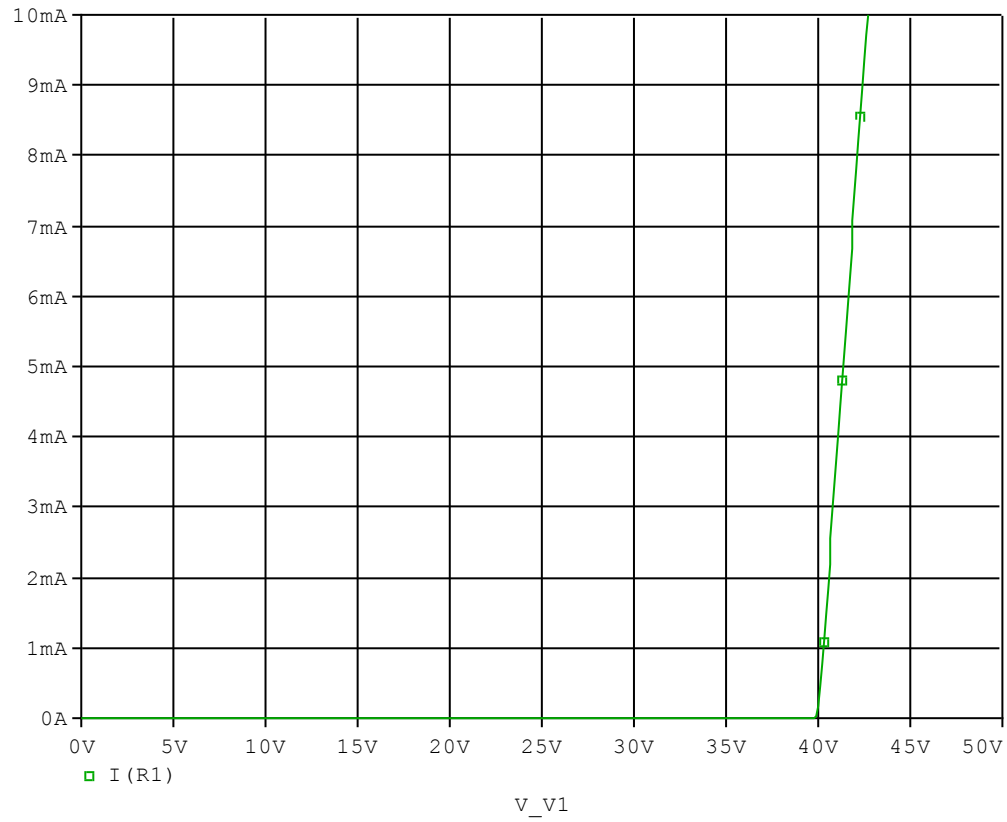

Evaluation Circuit

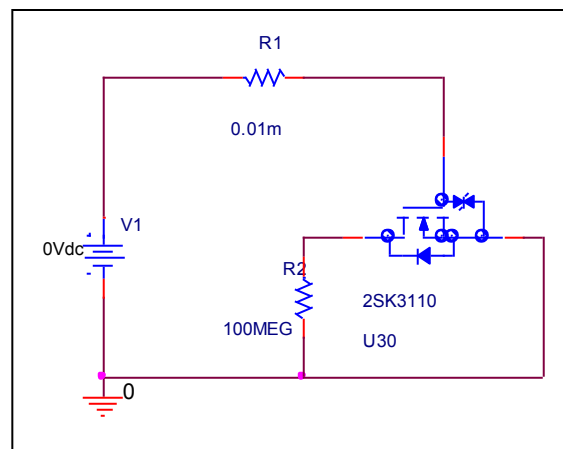

Zener Voltage Characteristic

Reference

