

Device Modeling Report

COMPONENTS: Power MOSFET (Professional)
PART NUMBER: TPCF8A01
MANUFACTURER: TOSHIBA
Body Diode (Standard) / ESD Protection Diode /
Schottky Barrier Diode (Standard)



POWER MOSFET MODEL


Pspice model parameter	Model description
LEVEL	
L	Channel Length
W	Channel Width
KP	Transconductance
RS	Source Ohmic Resistance
RD	Ohmic Drain Resistance
VTO	Zero-bias Threshold Voltage
RDS	Drain-Source Shunt Resistance
TOX	Gate Oxide Thickness
CGSO	Zero-bias Gate-Source Capacitance
CGDO	Zero-bias Gate-Drain Capacitance
CBD	Zero-bias Bulk-Drain Junction Capacitance
MJ	Bulk Junction Grading Coefficient
PB	Bulk Junction Potential
FC	Bulk Junction Forward-bias Capacitance Coefficient
RG	Gate Ohmic Resistance
IS	Bulk Junction Saturation Current
N	Bulk Junction Emission Coefficient
RB	Bulk Series Resistance
PHI	Surface Inversion Potential
GAMMA	Body-effect Parameter
DELTA	Width effect on Threshold Voltage
ETA	Static Feedback on Threshold Voltage
THETA	Modility Modulation
KAPPA	Saturation Field Factor
VMAX	Maximum Drift Velocity of Carriers
XJ	Metallurgical Junction Depth
UO	Surface Mobility

Body Diode Model


Pspice model parameter	Model description
IS	Saturation Current
N	Emission Coefficient
RS	Series Resistance
IKF	High-injection Knee Current
CJO	Zero-bias Junction Capacitance
M	Junction Grading Coefficient
VJ	Junction Potential
ISR	Recombination Current Saturation Value
BV	Reverse Breakdown Voltage(a positive value)
IBV	Reverse Breakdown Current(a positive value)
TT	Transit Time

V_{gs}-I_d Characteristic

Circuit Simulation result

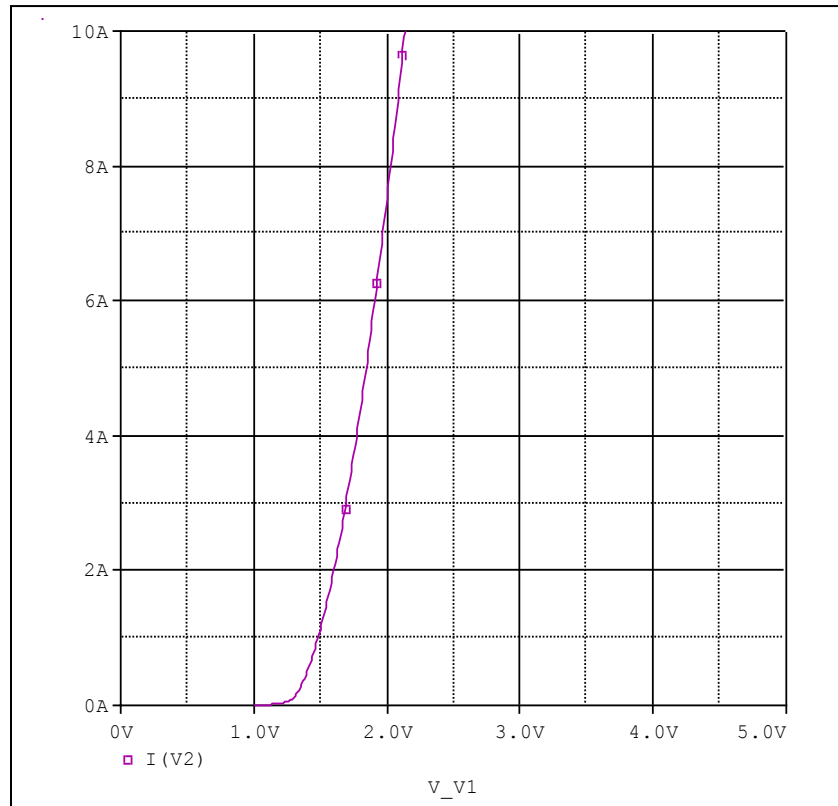


Evaluation circuit

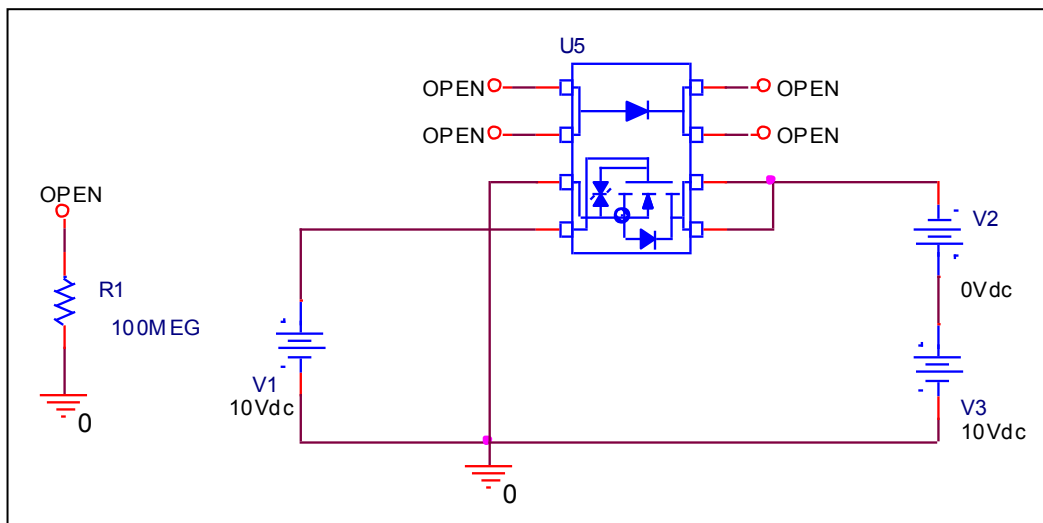

Comparison Graph

Circuit Simulation Result

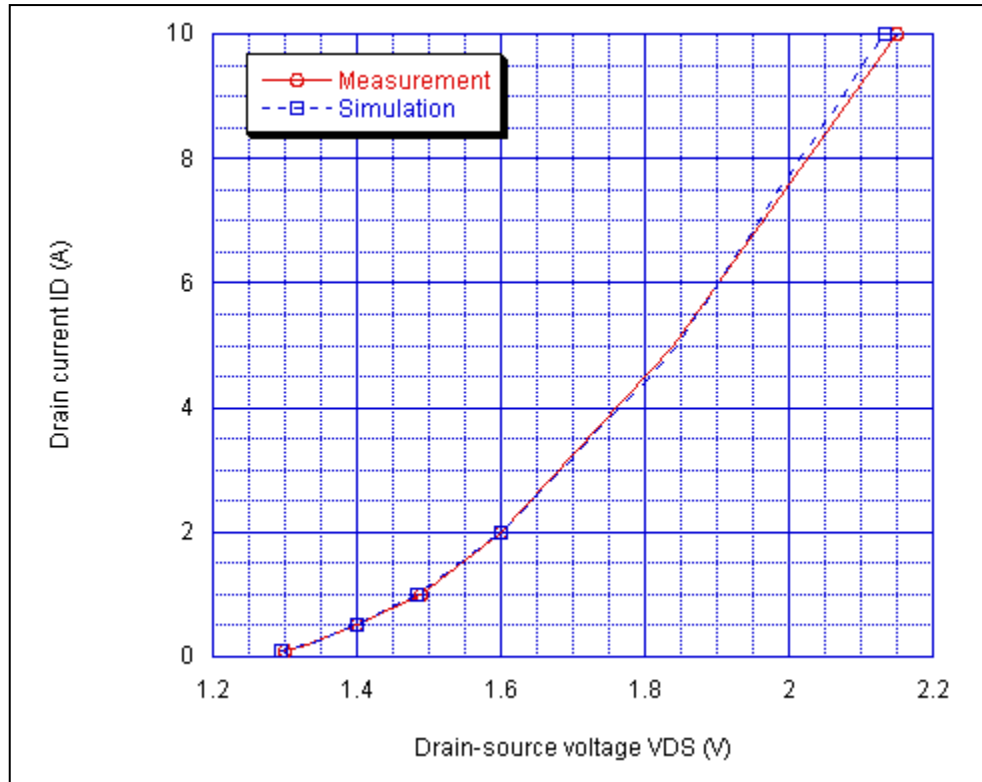


Simulation Result


I_D (A)	V_{GS} (V)		Error (%)
	Measurement	Simulation	
0.10	1.30	1.30	-0.32
0.20	1.33	1.33	0.07
0.50	1.40	1.40	0.09
1.00	1.49	1.48	-0.51
2.00	1.60	1.60	0.00
5.00	1.84	1.84	0.19
10.00	2.15	2.13	-0.73

Id-Rds(on) Characteristic

Circuit Simulation result

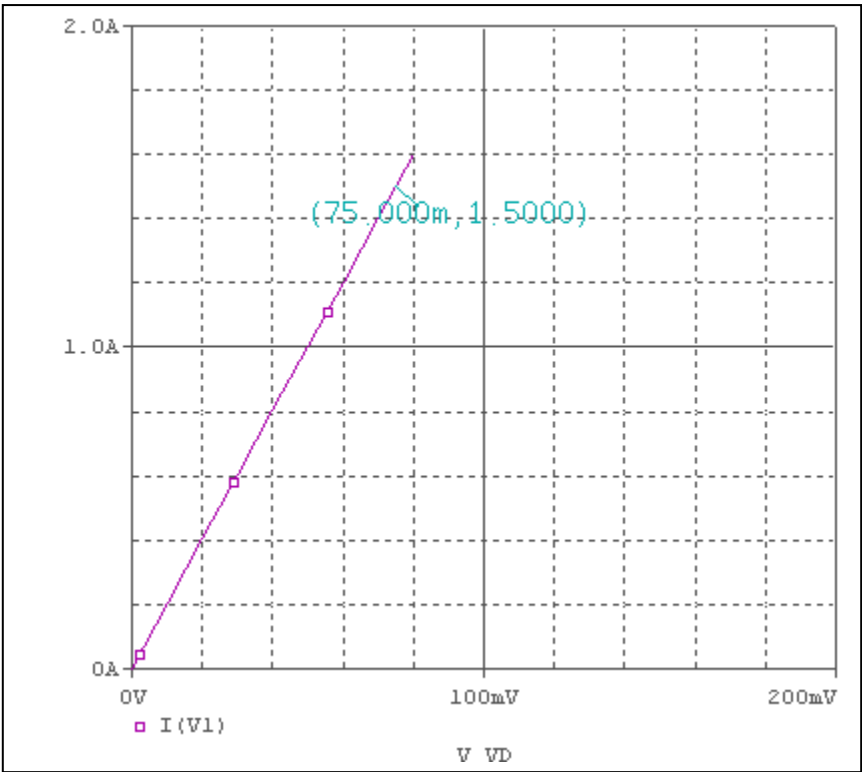

Evaluation circuit

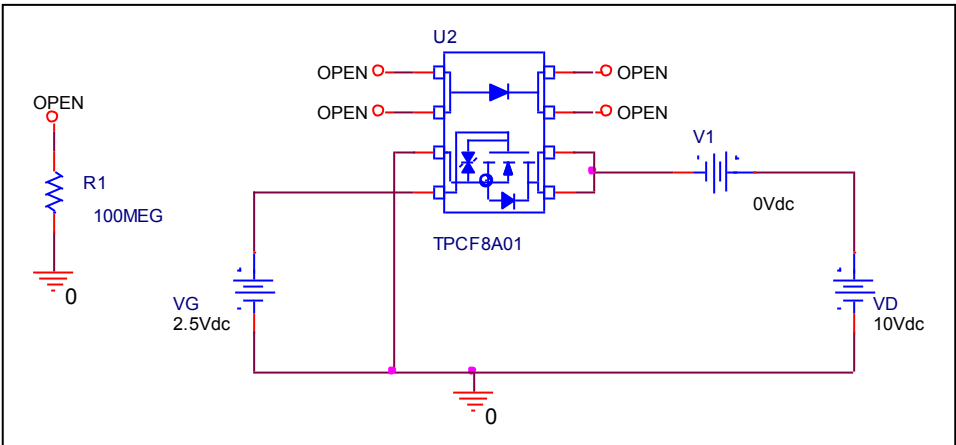


Simulation Result


$I_D=1.5A, V_{GS}=2.5V$	Measurement		Simulation		Error (%)
$R_{DS(on)}$	50.00	mΩ	50.00	mΩ	0.00

Gate Charge Characteristic

Circuit Simulation result

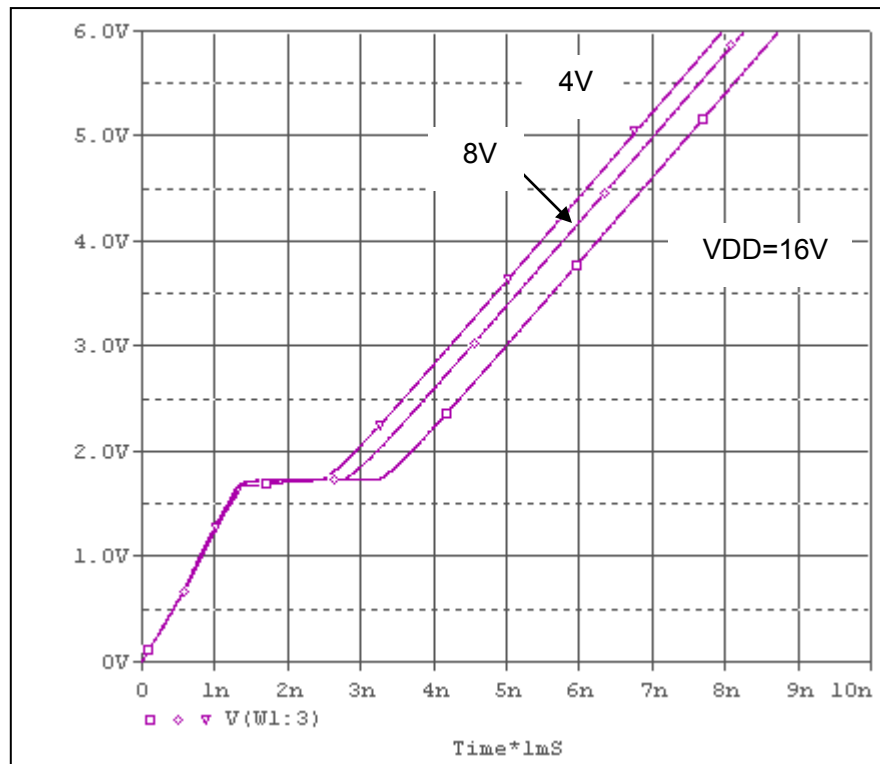


Evaluation circuit

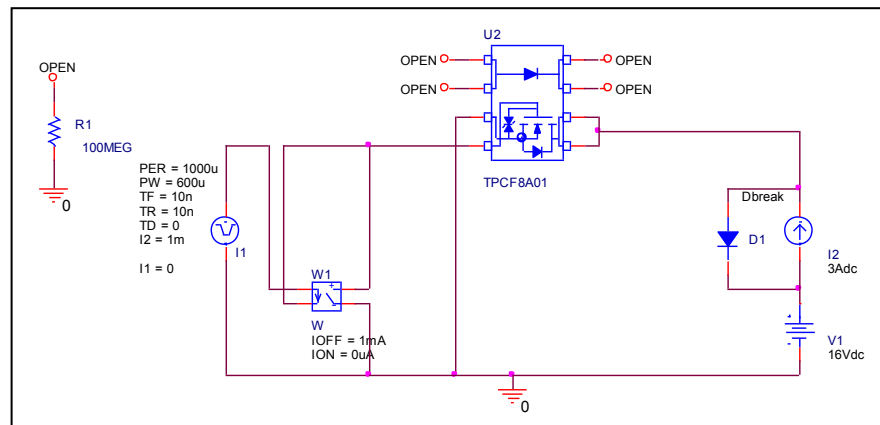

Simulation Result

$V_{DD}=16V, I_D=3A$ $V_{GS}=5V$	Measurement		Simulation		Error (%)
Q_{gs}	1.3	nC	1.2912	nC	-0.677
Q_{gd}	2.1	nC	2.0812	nC	-0.895
Q_g	7.5	nC	7.5000	nC	0.000

Capacitance Characteristic

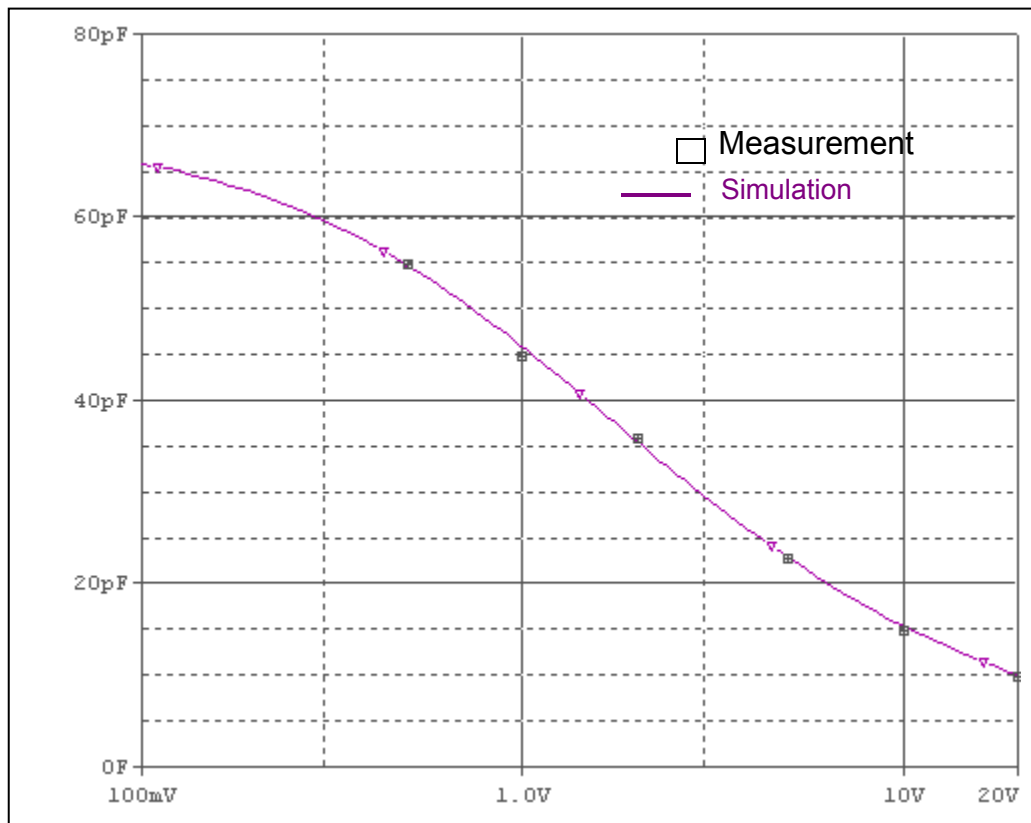


Simulation Result


V _{DS} (V)	C _{bd} (pF)		Error(%)
	Measurement	Simulation	
0.50	55.00	54.65	-0.64
1.00	45.00	45.70	1.56
2.00	36.00	35.50	-1.39
5.00	23.00	22.93	-0.30
10.00	15.00	15.53	3.53
20.00	10.00	10.00	0.00

Switching Time Characteristic

Circuit Simulation result

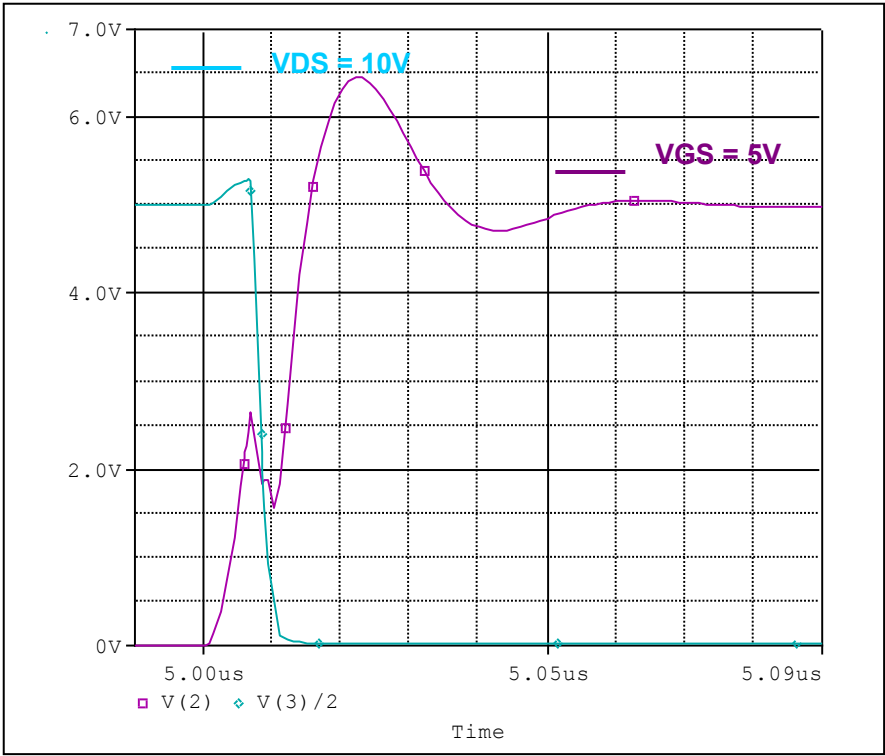

Evaluation circuit

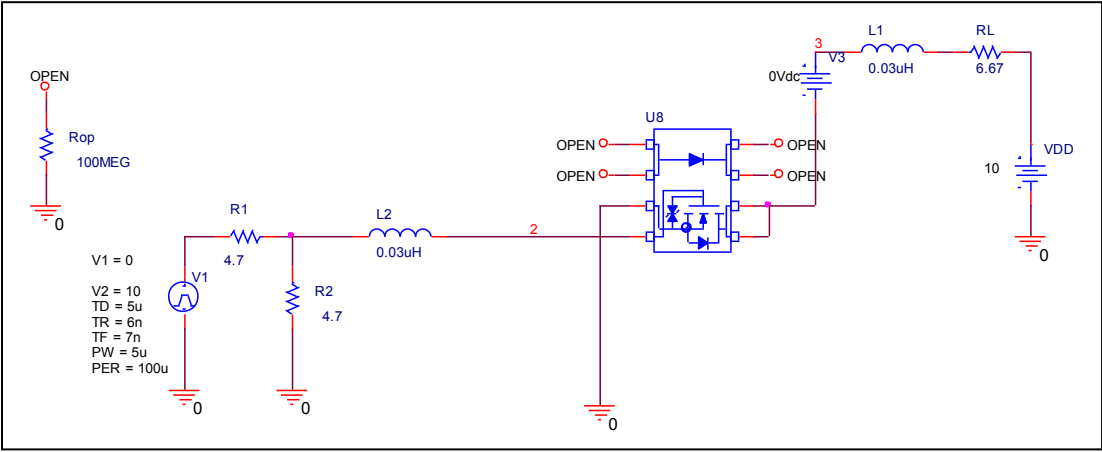


Simulation Result


$I_D=3A, V_{DD}=15V$ $V_{GS}=0/5V$	Measurement		Simulation		Error(%)
td (on)	7.50	ns	7.50	ns	0.00

Output Characteristic

Circuit Simulation result

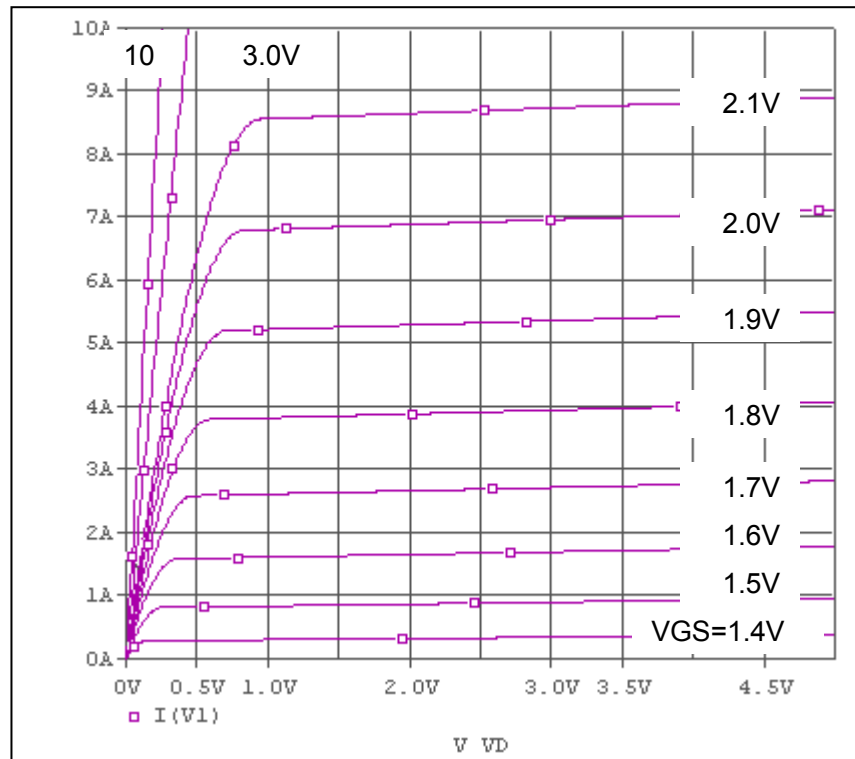

Evaluation circuit

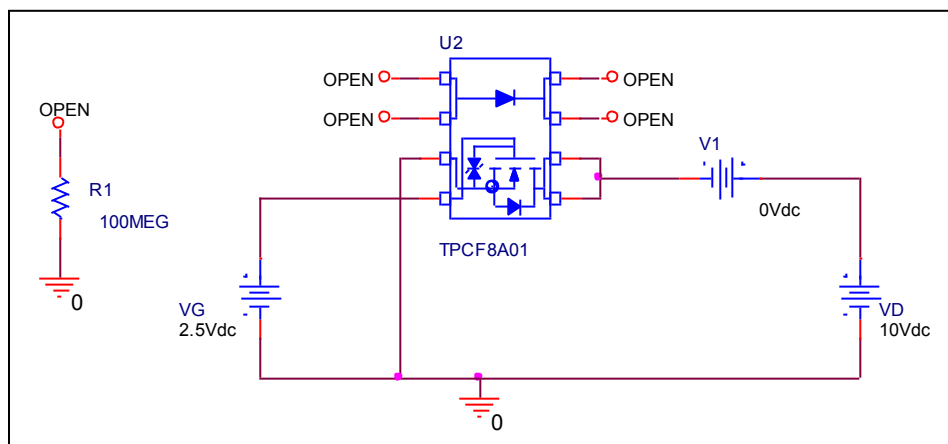

BODY DIODE SPICE MODEL


```
*$  
*PART NUMBER: TPCF8A01  
*MANUFACTURER: TOSHIBA  
*VDSS=20V, ID=3A  
*All Rights Reserved Copyright (C) Bee Technologies Inc. 2005  
.MODEL D8A01 D  
+ IS=2.5659E-6  
+ N=2.1585  
+ RS=13.923E-3  
+ IKF=3.6193  
+ CJO=3E-12  
+ ISR=0  
+ BV=20  
+ IBV=1E-6  
*****BODY DIODE STANDARD MODEL****  
*$
```

Body Diode Model


Pspice model parameter	Model description
IS	Saturation Current
N	Emission Coefficient
RS	Series Resistance
IKF	High-injection Knee Current
CJO	Zero-bias Junction Capacitance
M	Junction Grading Coefficient
VJ	Junction Potential
ISR	Recombination Current Saturation Value
BV	Reverse Breakdown Voltage(a positive value)
IBV	Reverse Breakdown Current(a positive value)
TT	Transit Time

Forward Current Characteristic

Circuit Simulation Result

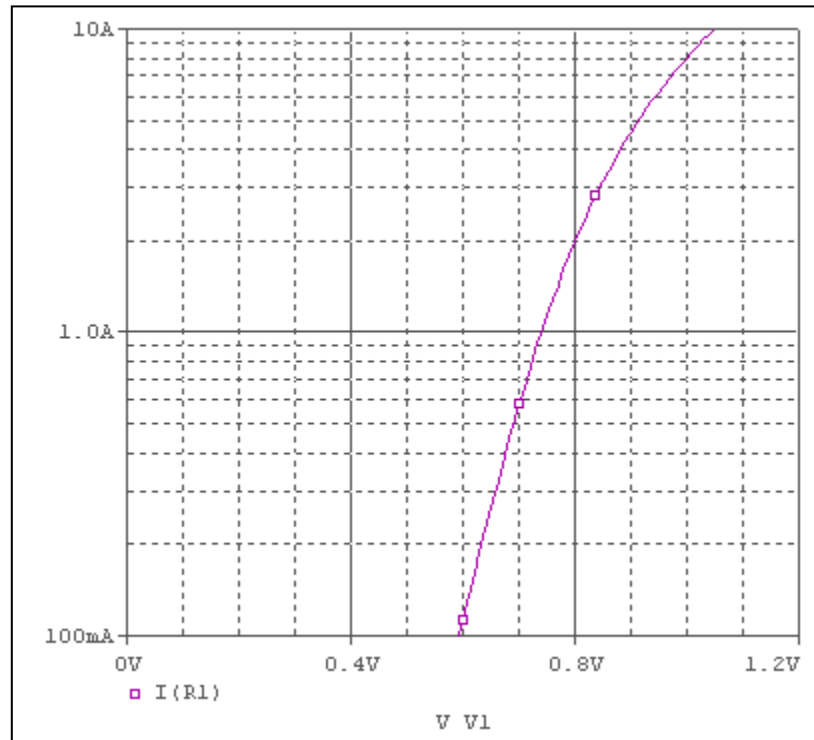


Evaluation Circuit

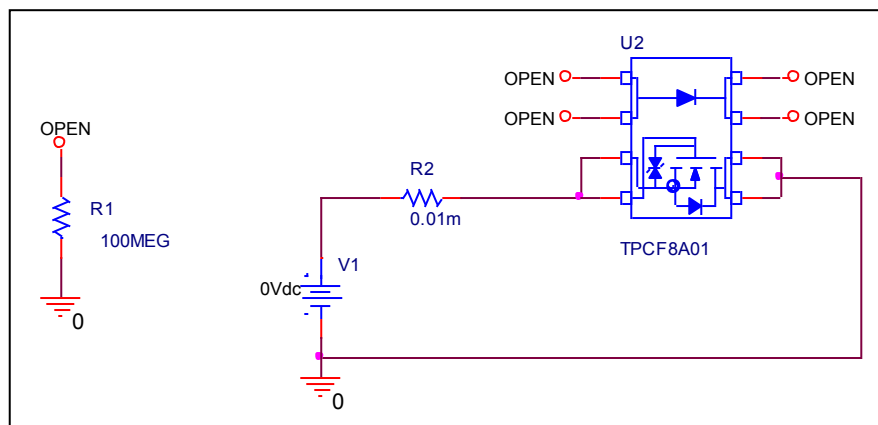

Comparison Graph

Circuit Simulation Result

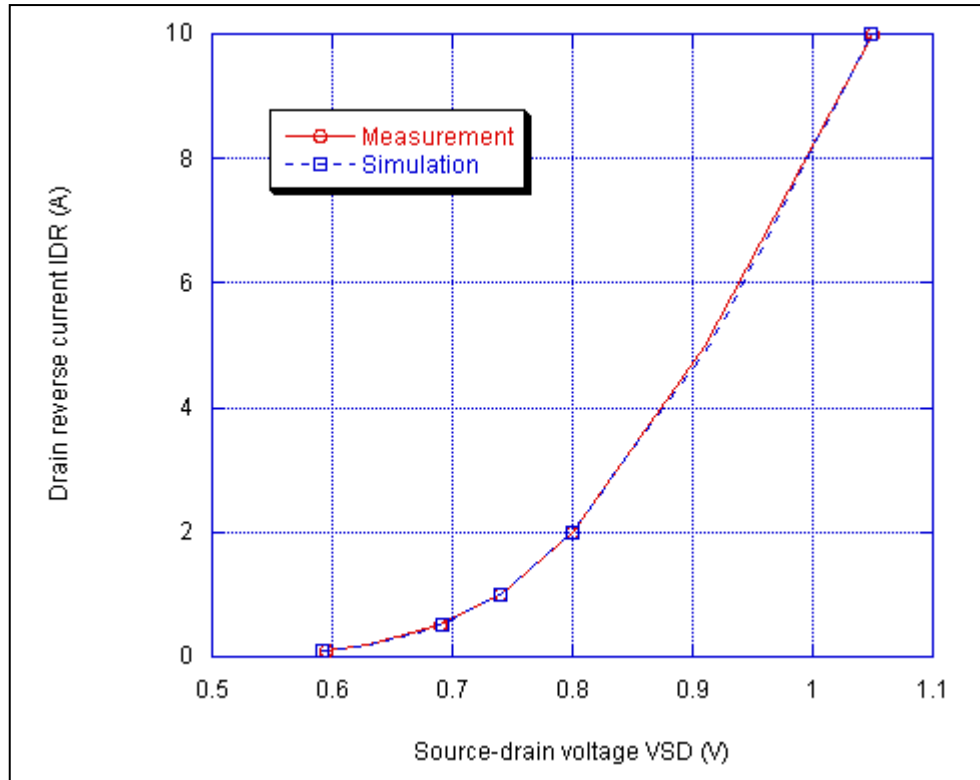


Simulation Result


Ifwd(A)	Vfwd(V) Measurement	Vfwd(V) Simulation	%Error
0.10	0.60	0.59	-0.50
0.20	0.63	0.63	0.48
0.50	0.69	0.69	0.14
1.00	0.74	0.74	0.00
2.00	0.80	0.80	0.00
5.00	0.91	0.91	0.44
10.00	1.05	1.05	-0.10

Reverse Recovery Characteristic

Circuit Simulation Result

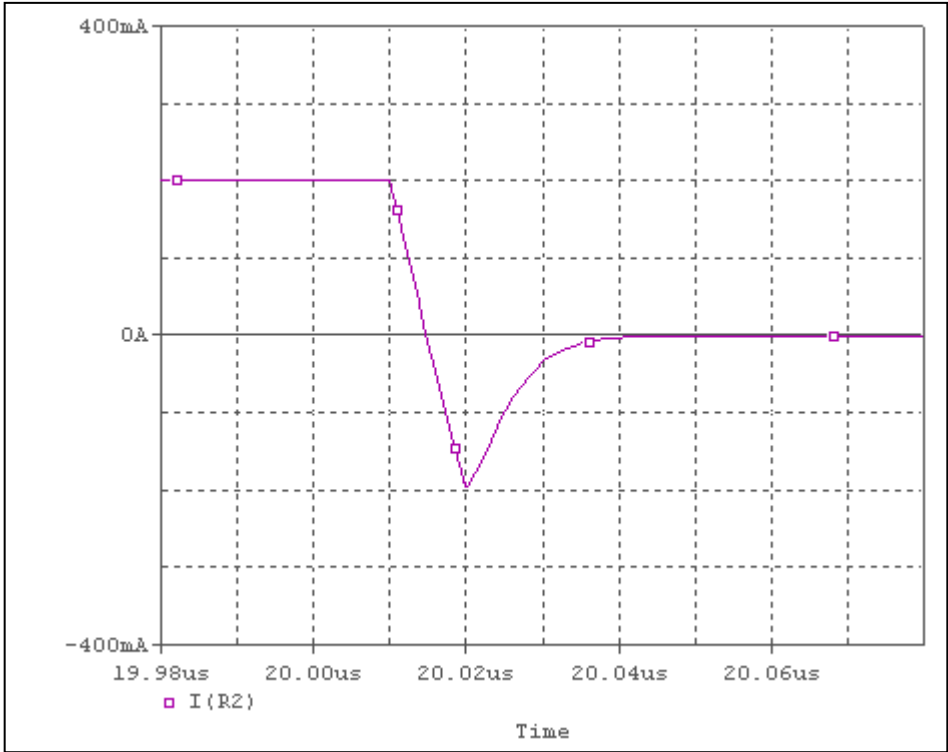

Evaluation Circuit

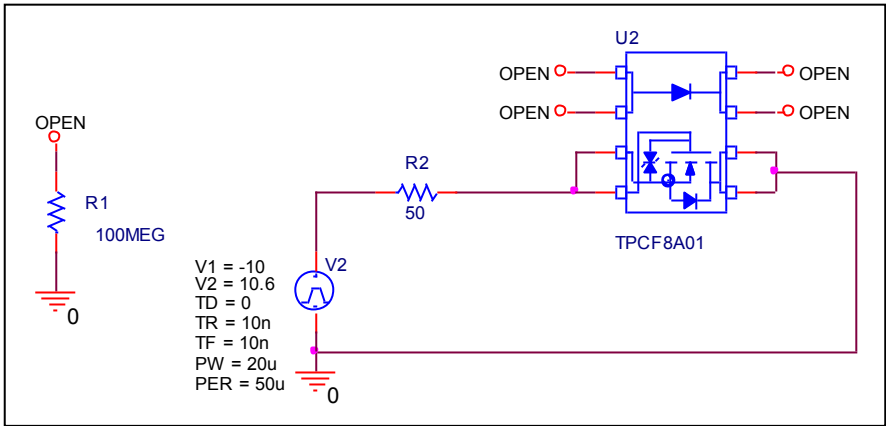


Compare Measurement vs. Simulation

	Measurement		Simulation		Error (%)
$t_{rr}=t_{rj}+t_{rb}$	17.00	ns	17.13	ns	0.78

Reverse Recovery Characteristic


Reference

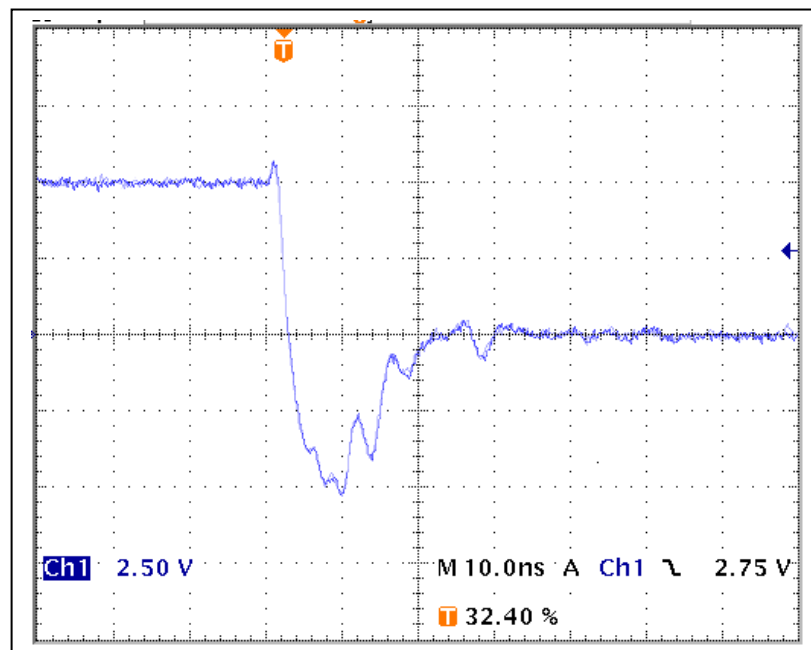

$Trj=6.6(ns)$

$Trb=10.4(ns)$

Conditions: $I_{fwd}=I_{rev}=0.2(A)$, $R_I=50$

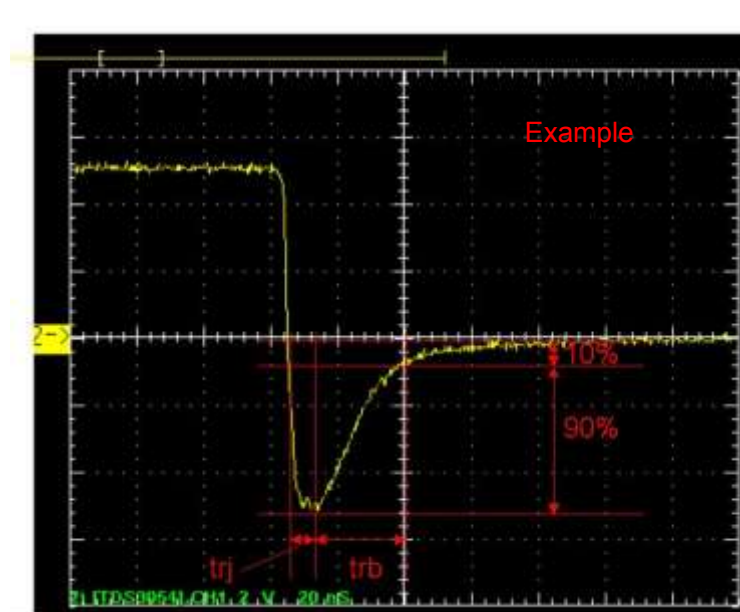


Relation between trj and trb

ESD PROTECTION DIODE SPICE MODEL


```
*$  
*PART NUMBER: TPCF8A01  
*MANUFACTURER: TOSHIBA  
*VGSS=12V  
*All Rights Reserved Copyright (C) Bee Technologies Inc. 2005  
.SUBCKT DZ8A01 1 2  
D1      1 3 DZ  
D2      2 3 DZ1  
.MODEL DZ D  
+ IS=0.01p N=0.1 ISR=0 IBV=0.001 BV=15.6 CJO=3E-12  
+ RS=333 XTI=0 EG=0  
.MODEL DZ1 D  
+ IS=0.01p N=0.1 ISR=0 IBV=0.001 BV=15.6 RS=0 CJO=3E-12  
+ XTI=0 EG=0  
.ENDS  
*$
```


Zener Voltage Characteristic

Circuit Simulation Result

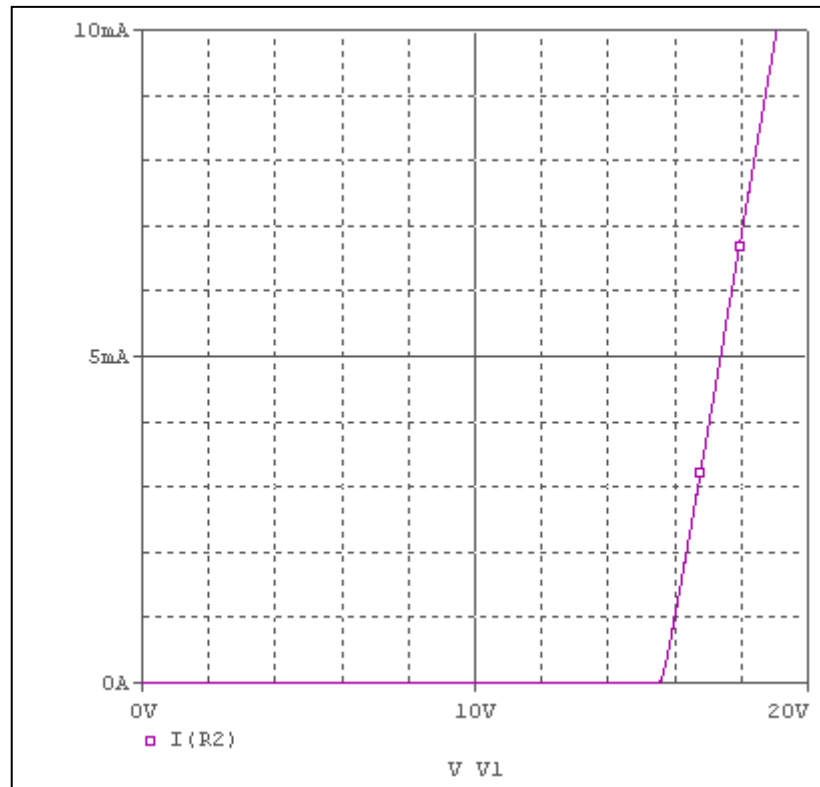


Evaluation Circuit

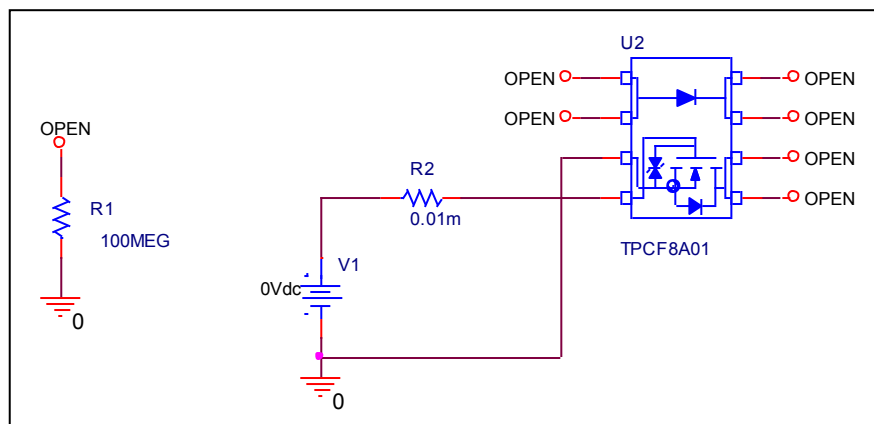

Zener Voltage Characteristic

Reference

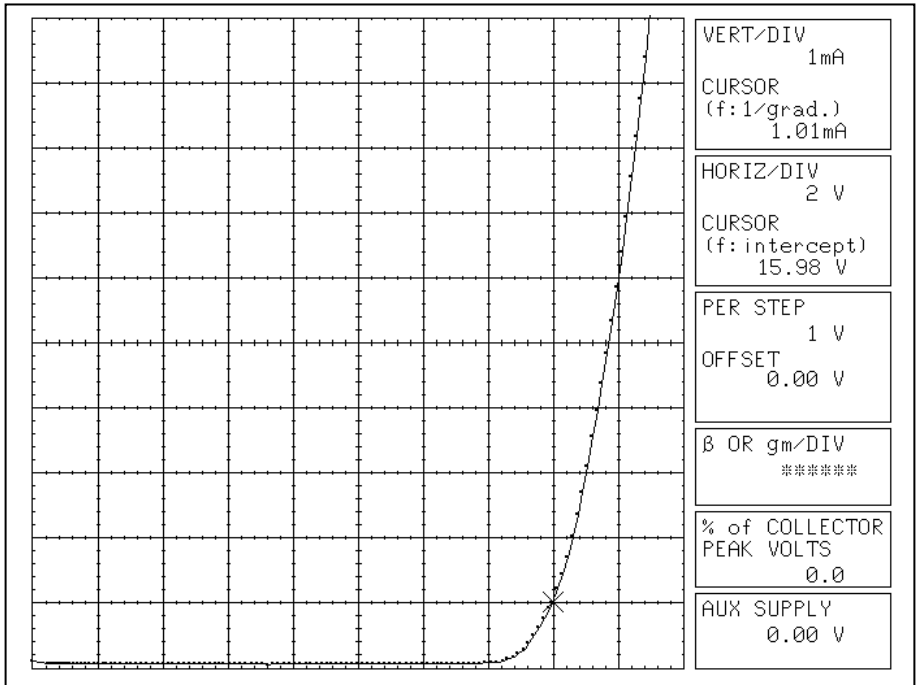


DIODE SCHOTTKY SPICE MODEL


```
*$  
.MODEL DSB8A01 D  
+ IS=88.198E-9  
+ N=1.0182  
+ RS=65.469E-3  
+ IKF=212.80  
+ EG=.69  
+ CJO=267.49E-12  
+ M=.48544  
+ VJ=.3905  
+ ISR=0  
+ BV=20  
+ IBV=2.5000E-6  
+ TT=3E-12  
*****SBD MODEL*****
```

Forward Current Characteristic of Schottky Barrier Diode

Circuit Simulation Result

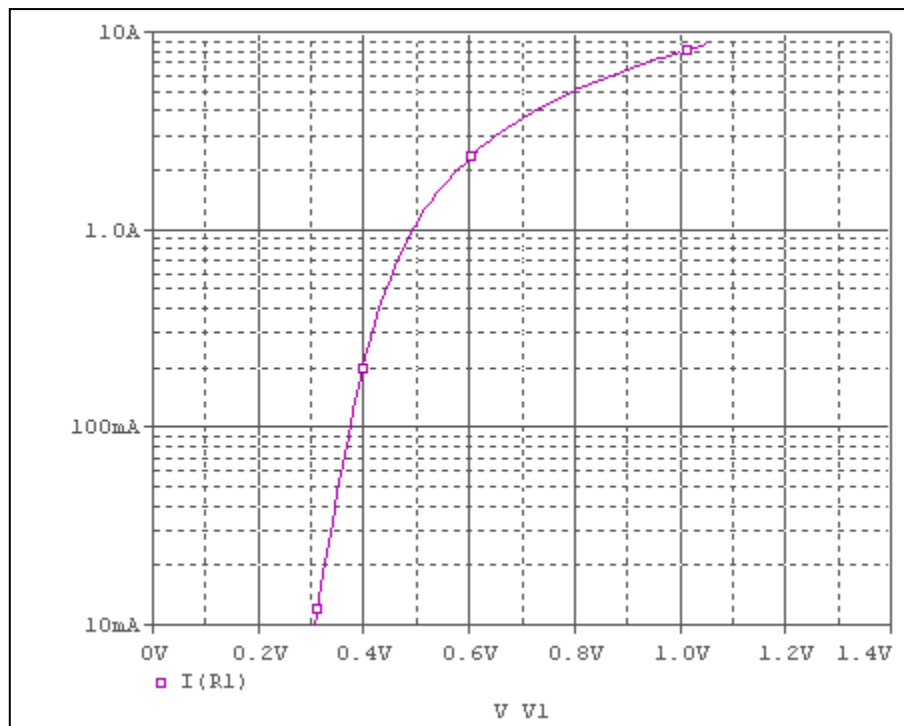


Evaluation Circuit

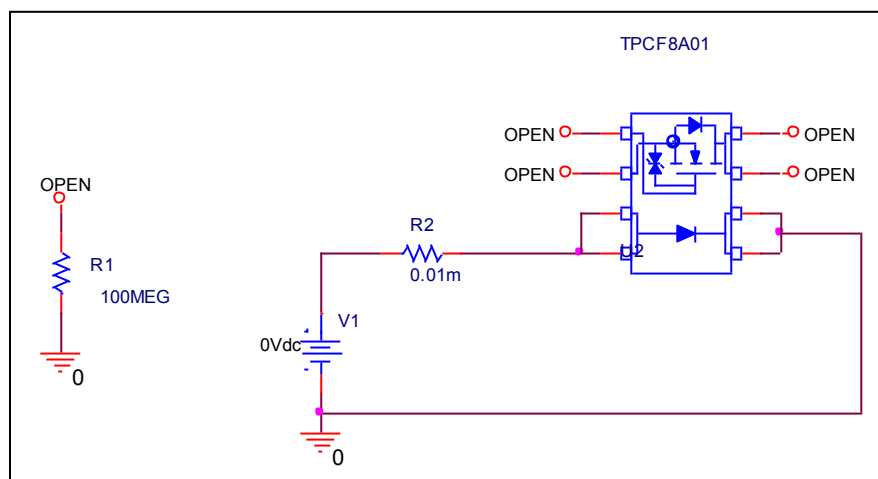

Comparison Graph

Circuit Simulation Result

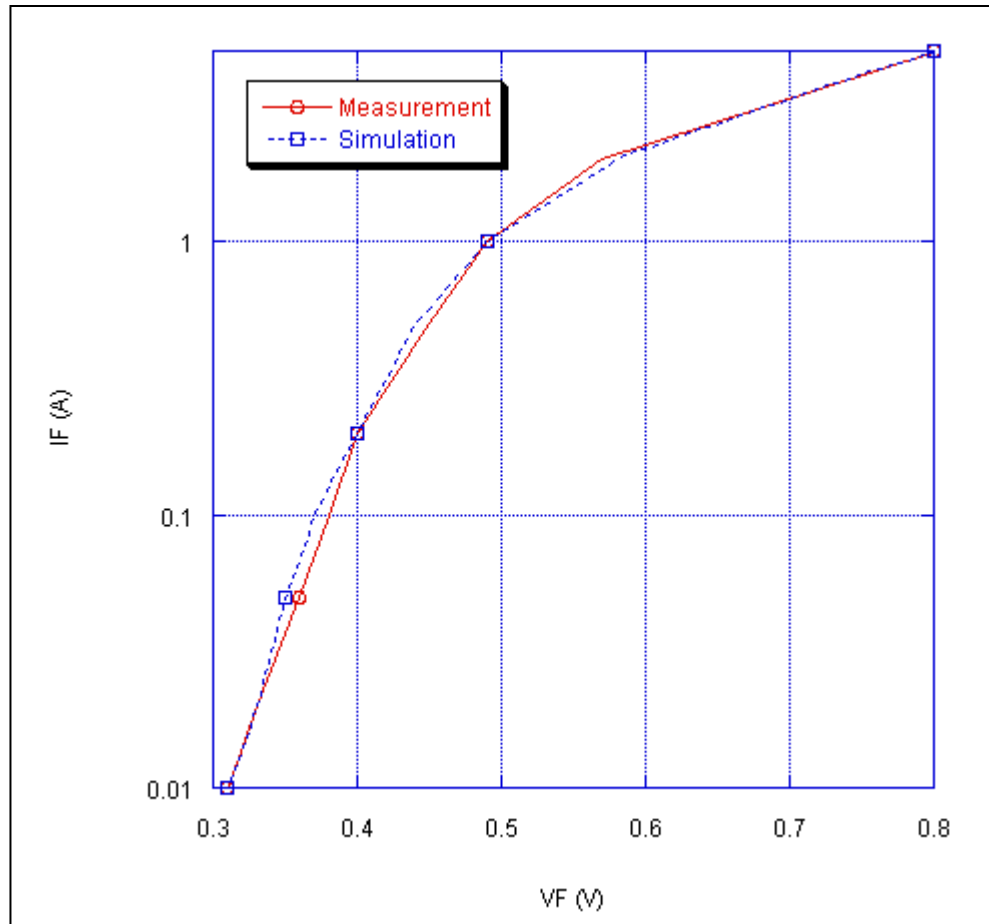


Simulation Result


Ifwd (A)	Vfwd (V)		%Error
	Measurement	Simulation	
0.01	0.31	0.31	0.59
0.02	0.33	0.33	0.18
0.05	0.36	0.35	-0.87
0.10	0.38	0.37	-0.43
0.20	0.40	0.40	0.10
0.50	0.45	0.44	-0.63
1.00	0.49	0.49	0.67
2.00	0.57	0.58	1.25
5.00	0.80	0.80	-0.29

Junction Capacitance Characteristic of Schottky Barrier Diode

Circuit Simulation Result

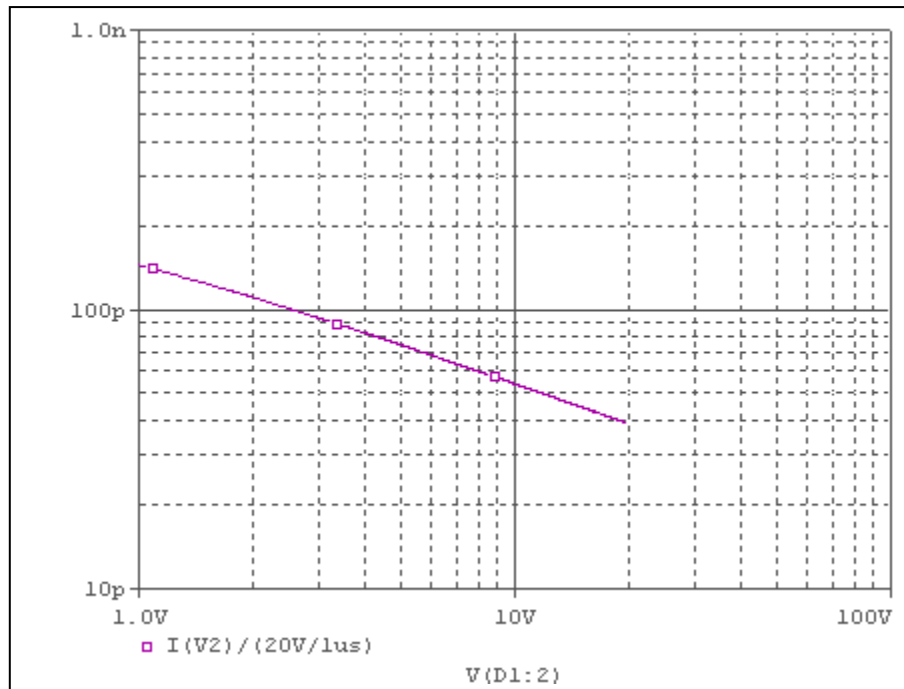


Evaluation Circuit

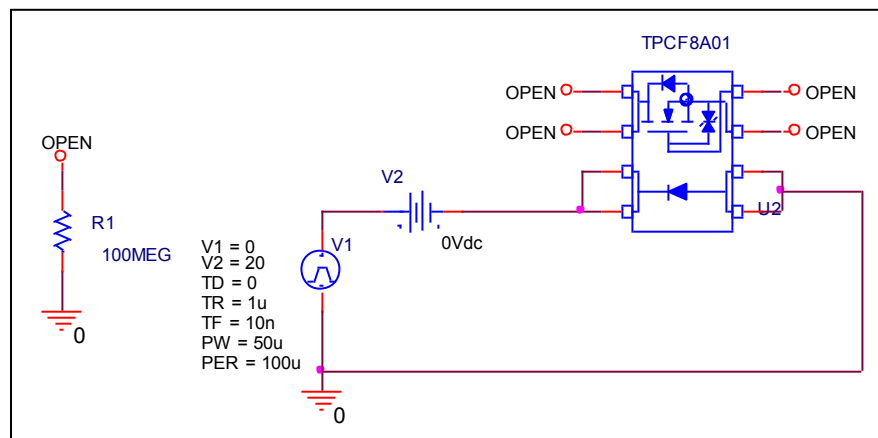

Comparison Graph

Circuit Simulation Result

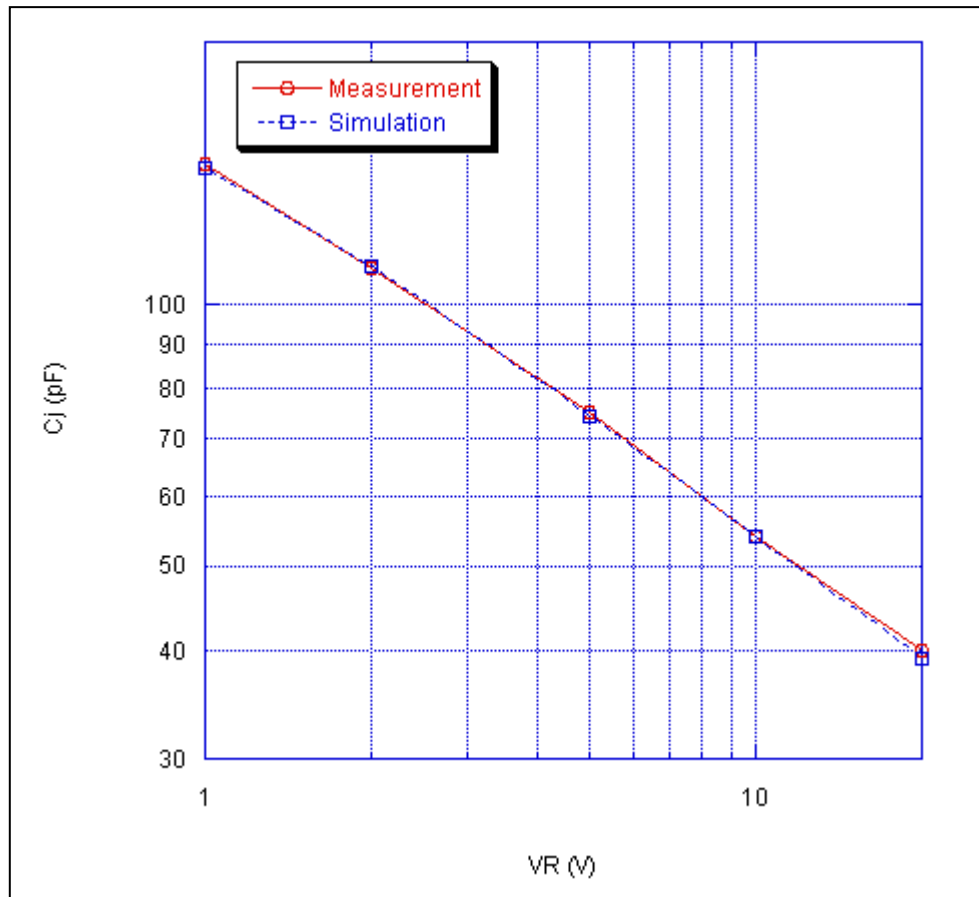

Simulation Result

Vrev(V)	Cj(pF)		%Error
	Measurement	Simulation	
1.00	145.00	143.57	-0.99
2.00	110.00	110.40	0.37
5.00	75.00	74.44	-0.75
10.00	54.00	54.12	0.22
20.00	40.00	39.14	-2.15