

Device Modeling Report

COMPONENTS: TRANSISTOR PART NUMBER: 2SC6113 MANUFACTURER: SANYO





Bee Technologies Inc.

TRANSISTOR MODEL


PSpice model parameter	Model description
IS	Saturation Current
BF	Ideal Maximum Forward Beta
NF	Forward Current Emission Coefficient
VAF	Forward Early Voltage
IKF	Forward Beta Roll-off Knee Current
ISE	Non-ideal Base-Emitter Diode Saturation Current
NE	Non-ideal Base-Emitter Diode Emission Coefficient
BR	Ideal Maximum Reverse Beta
NR	Reverse Emission Coefficient
VAR	Reverse Early Voltage
IKR	Reverse Beta Roll-off Knee Current
ISC	Non-ideal Base-Collector Diode Saturation Current
NC	Non-ideal Base-Collector Diode Emission Coefficient
NK	Forward Beta Roll-off Slope Exponent
RE	Emitter Resistance
RB	Base Resistance
RC	Series Collector Resistance
CJE	Zero-bias Emitter-Base Junction Capacitance
VJE	Emitter-Base Junction Potential
MJE	Emitter-Base Junction Grading Coefficient
CJC	Zero-bias Collector-Base Junction Capacitance
VJC	Collector-base Junction Potential
MJC	Collector-base Junction Grading Coefficient
FC	Coefficient for Onset of Forward-bias Depletion Capacitance
TF	Forward Transit Time
XTF	Coefficient for TF Dependency on Vce
VTF	Voltage for TF Dependency on Vce
ITF	Current for TF Dependency on Ic
PTF	Excess Phase at $f=1/2\pi*TF$
TR	Reverse Transit Time
EG	Activation Energy
XTB	Forward Beta Temperature Coefficient
XTI	Temperature Coefficient for IS

Reverse

Reverse Early Voltage Characteristic

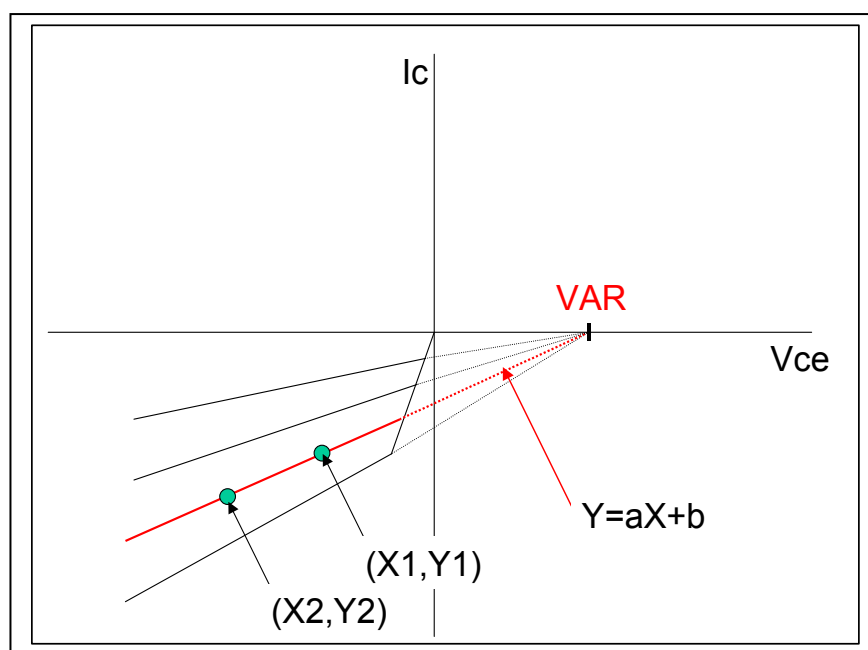
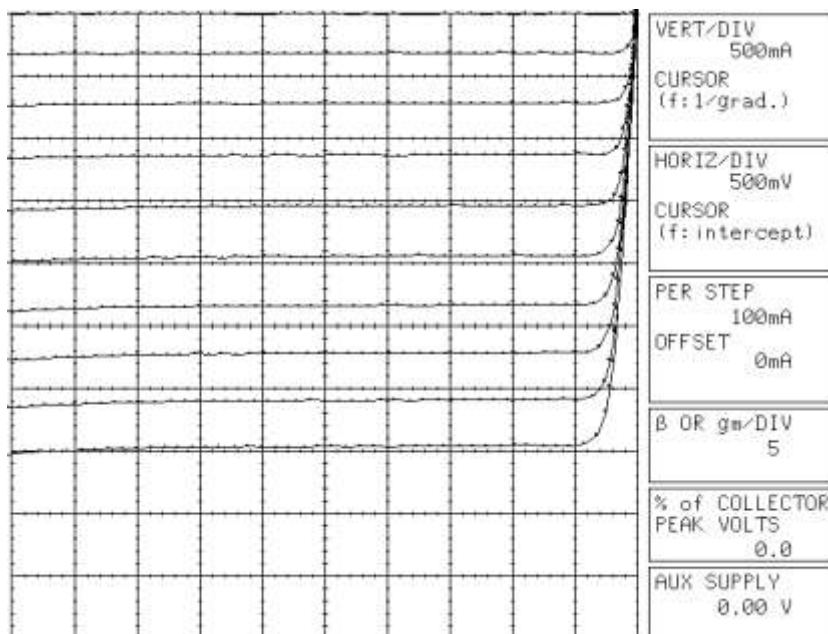


Reverse DC Beta Characteristic (I_e vs. h_{FE})

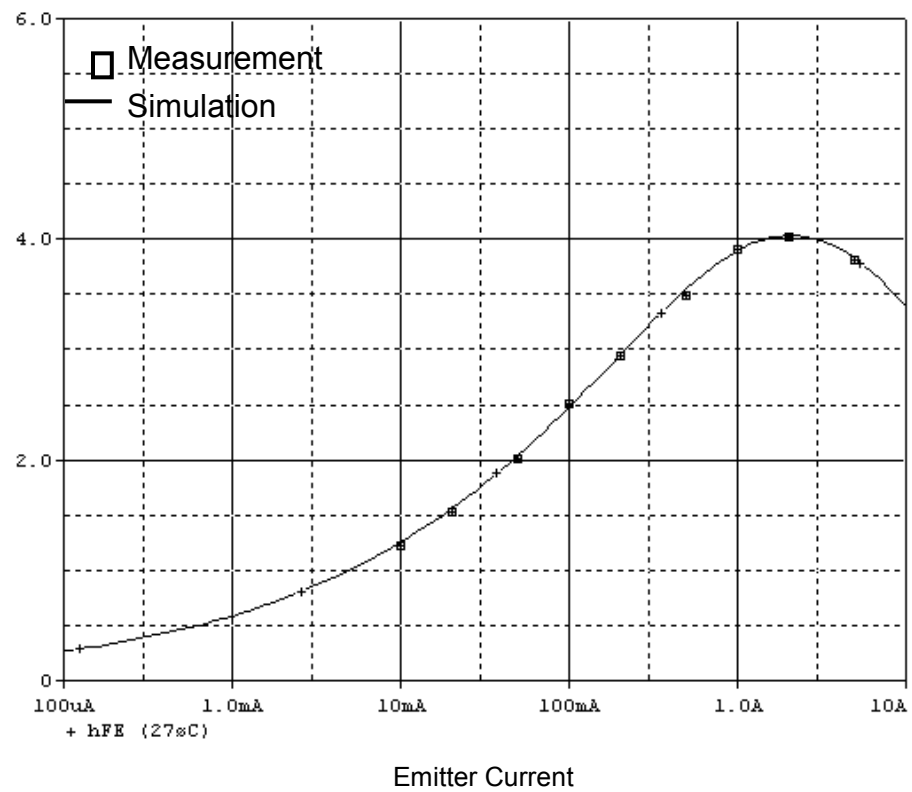


Forward


Forward Early Voltage Characteristic

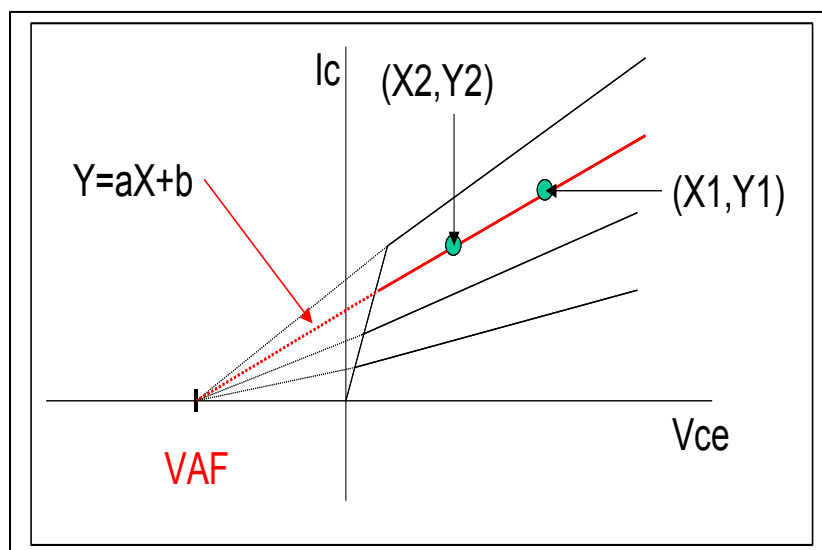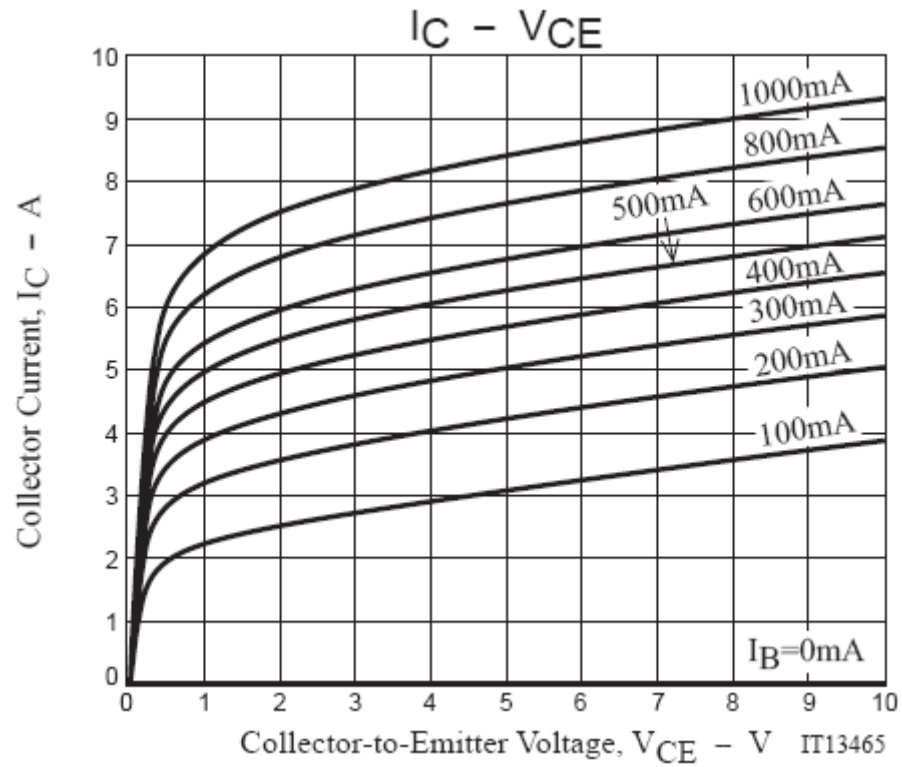

C-B Capacitance Characteristics

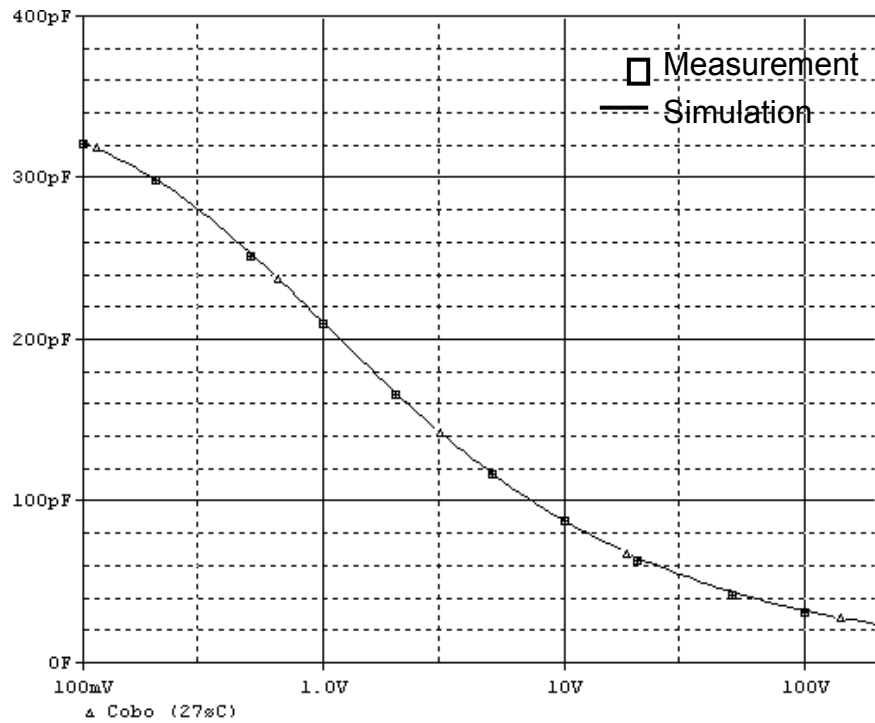


E-B Capacitance Characteristics

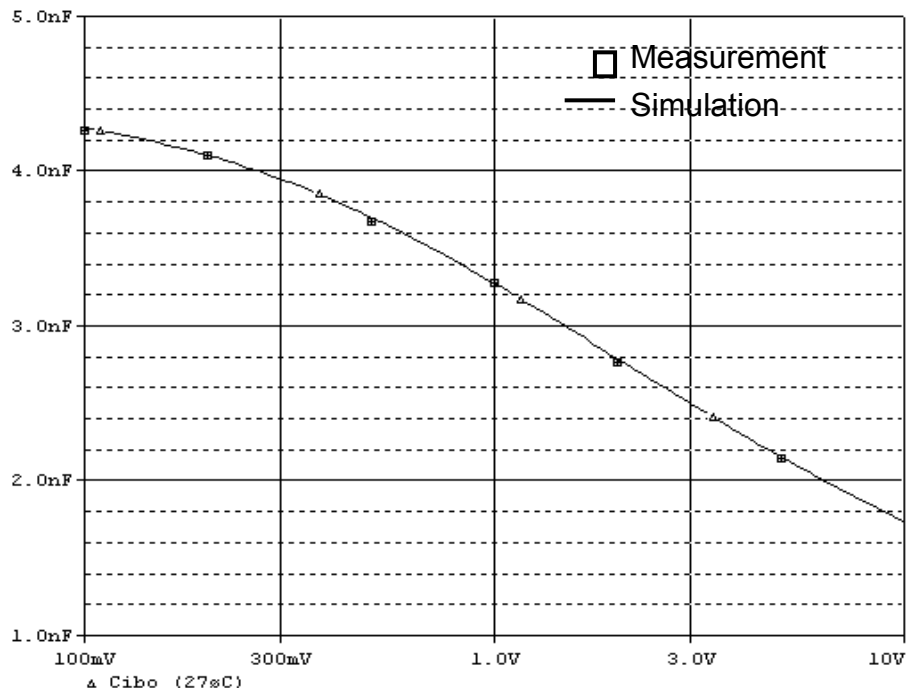


Transistor h_{FE} - I_C Characteristics

Circuit Simulation Result

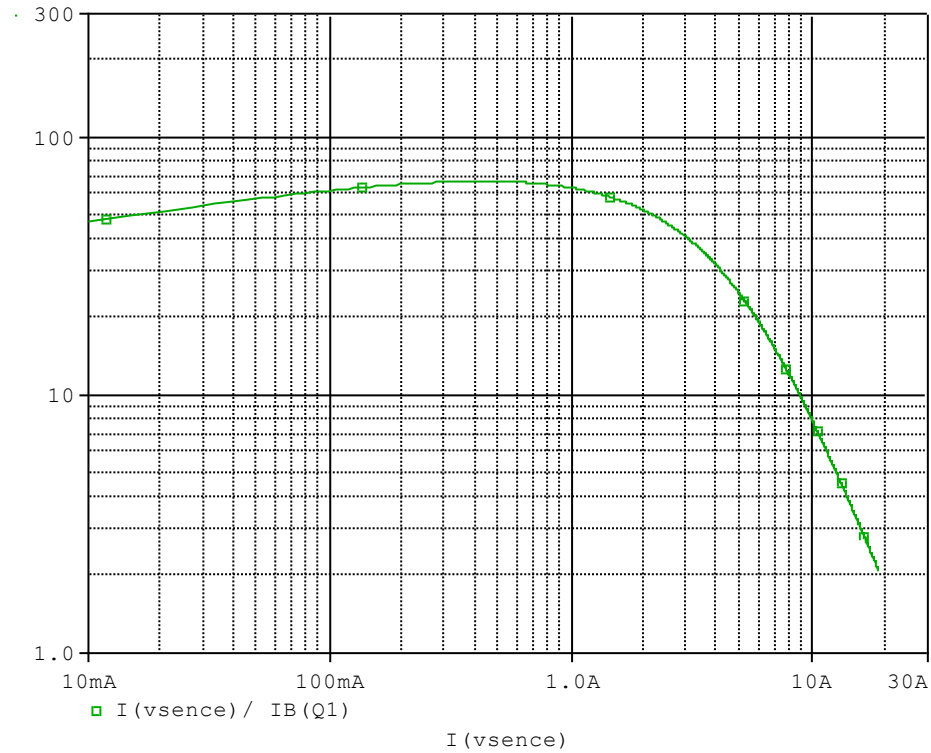


Evaluation Circuit

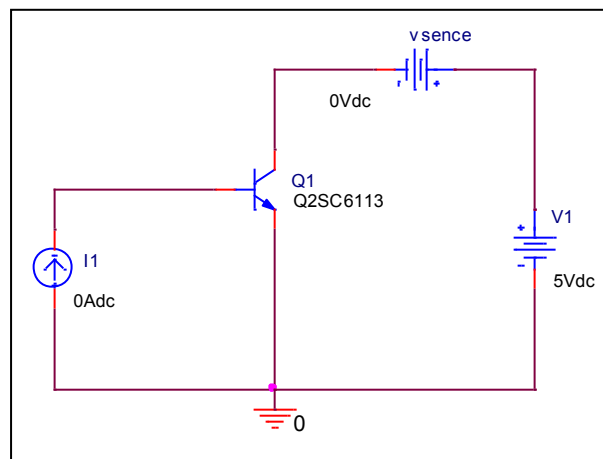

Comparison Graph

Circuit Simulation Result

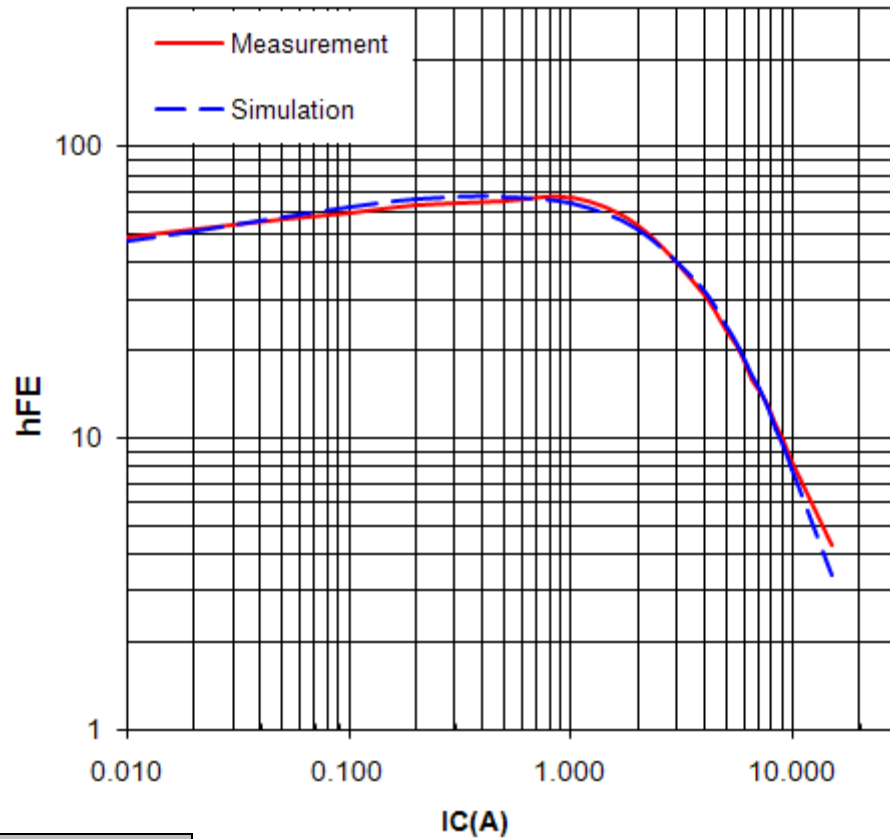


Simulation Result


IC(A)	hFE		Error(%)
	Measurement	Simulation	
0.010	49.000	47.042	-3.996
0.020	52.000	51.530	-0.904
0.050	56.000	57.557	2.780
0.100	59.500	61.907	4.045
0.200	62.500	65.496	4.794
0.500	65.200	67.254	3.150
1.000	66.500	63.457	-4.576
2.000	54.000	51.959	-3.780
5.000	23.500	24.534	4.400
8.500	11.000	10.712	-2.618
10.000	8.290	7.882	-4.920

$V_{CE(Sat)}$ - I_C Characteristics

Circuit Simulation Result

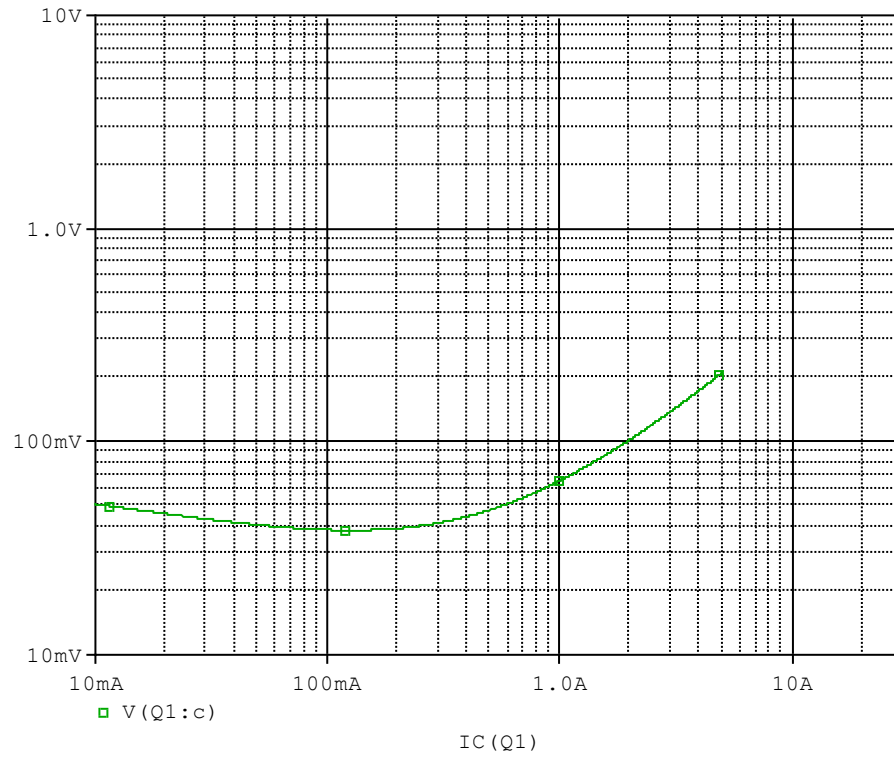


Evaluation Circuit

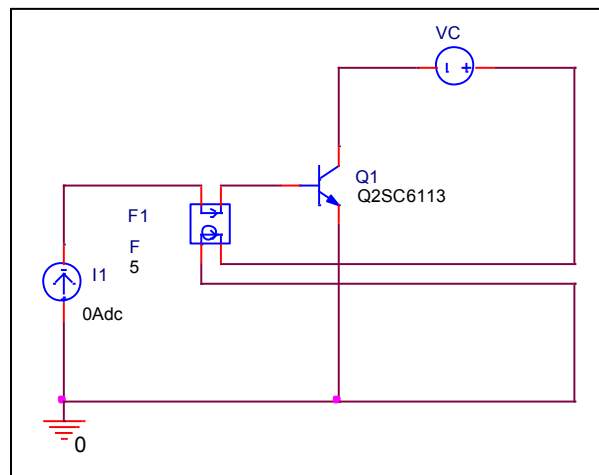

Comparison Graph

Circuit Simulation Result

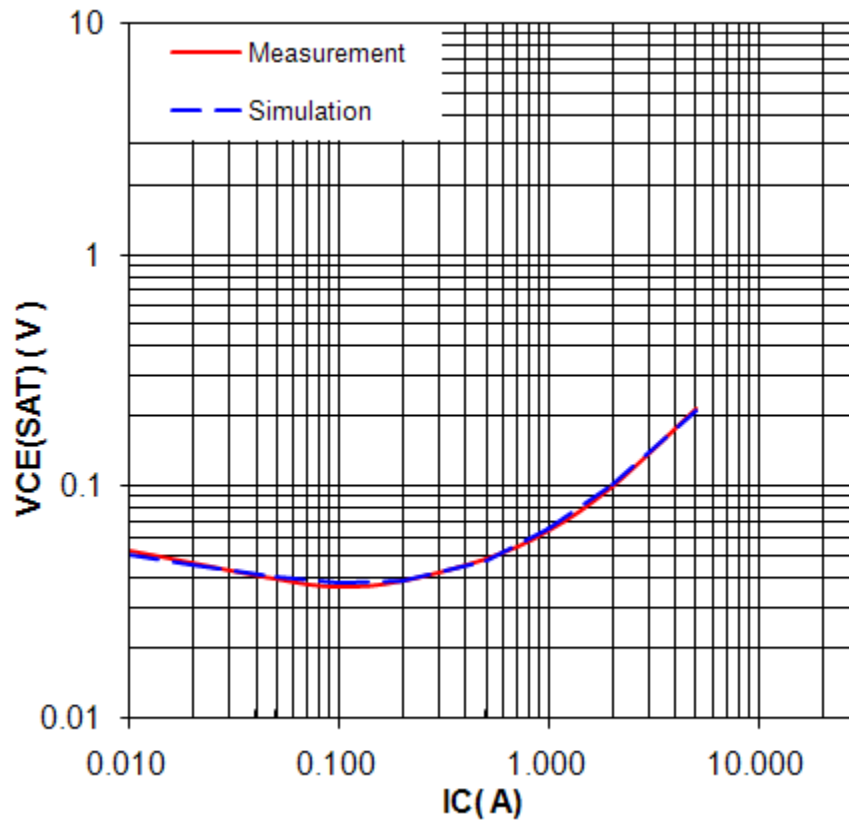


Simulation Result


IC(A)	VCE(sat)(V)		Error(%)
	Measurement	Simulation	
0.01000	0.05300	0.05108	-3.62830
0.02000	0.04700	0.04594	-2.24681
0.05000	0.03950	0.04071	3.06835
0.10000	0.03700	0.03859	4.30000
0.20000	0.03900	0.03919	0.49744
0.50000	0.04900	0.04780	-2.45306
1.00000	0.06400	0.06558	2.46250
2.00000	0.10000	0.10214	2.13900
5.00000	0.21500	0.21057	-2.06093

$V_{BE(Sat)}-I_C$ Characteristics

Circuit Simulation Result

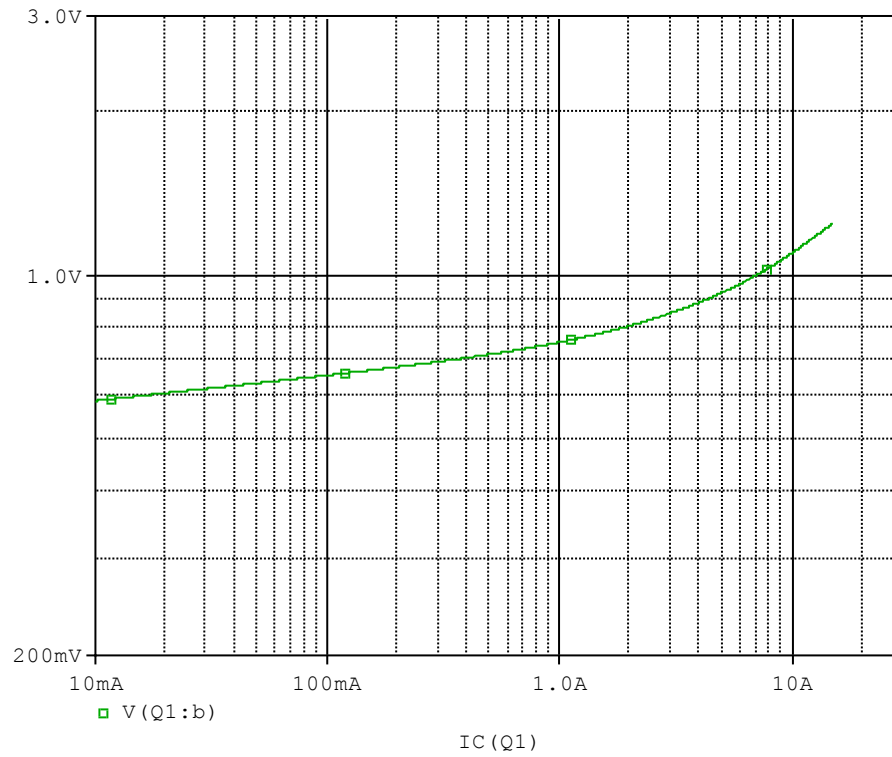


Evaluation Circuit

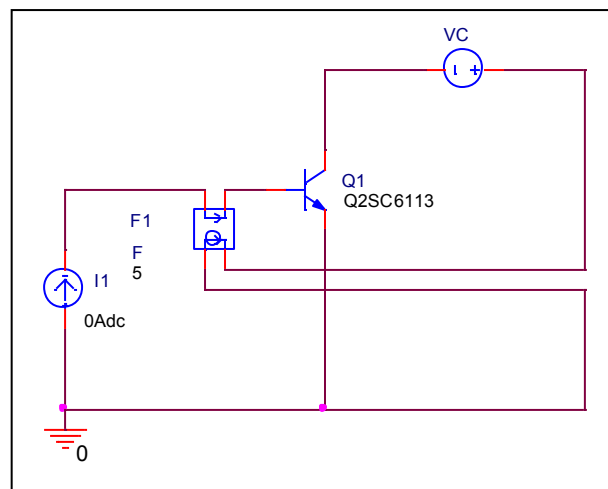

Comparison Graph

Circuit Simulation Result

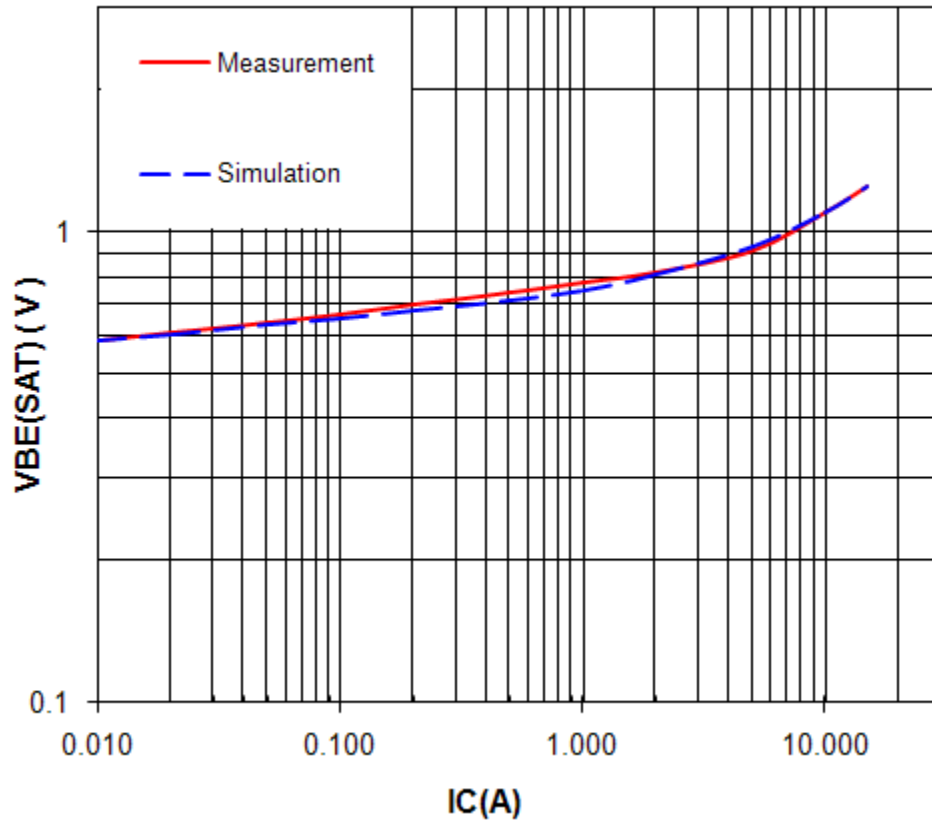


Simulation Result


IC(A)	VBE(sat)(V)		Error(%)
	Measurement	Simulation	
0.01000	0.590	0.588	-0.345
0.02000	0.610	0.607	-0.436
0.05000	0.640	0.634	-0.959
0.10000	0.670	0.655	-2.211
0.20000	0.700	0.679	-3.066
0.50000	0.740	0.716	-3.264
1.00000	0.780	0.754	-3.375
2.00000	0.820	0.808	-1.488
5.00000	0.910	0.930	2.181
10.00000	1.100	1.099	-0.064
15.00000	1.250	1.247	-0.208

Switching Characteristics

Circuit simulation result

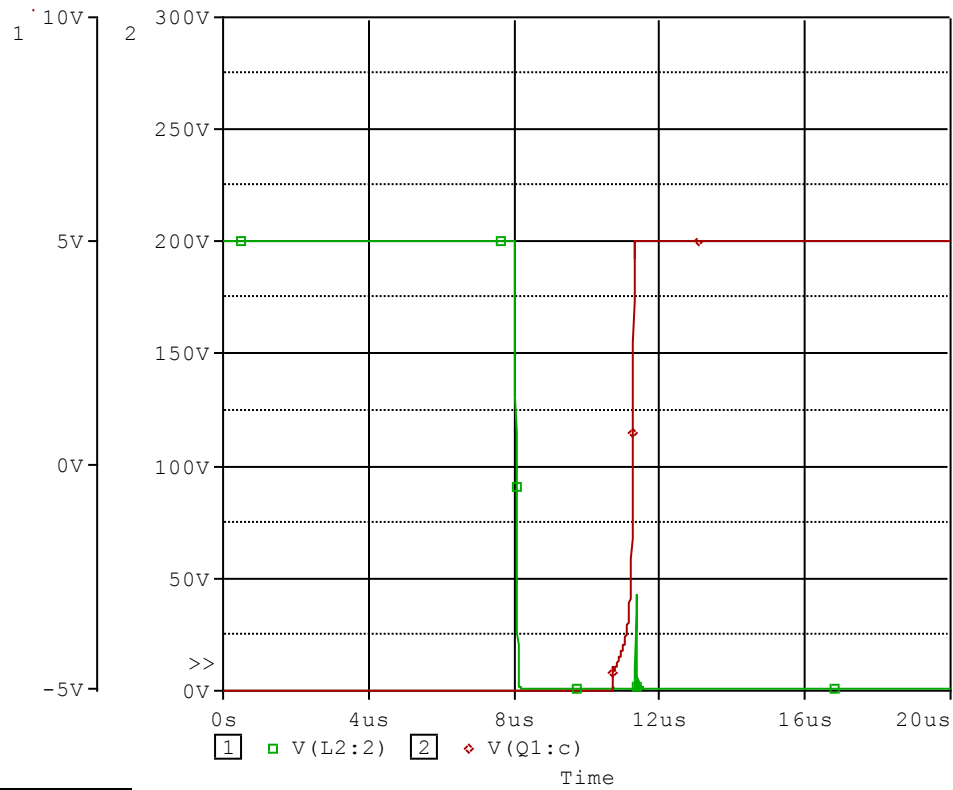

Evaluation circuit

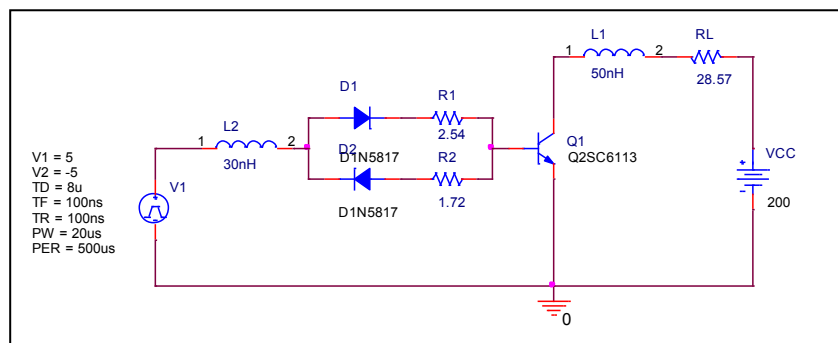


Simulation result


	Measurement	Simulation	%Error
t_f (us)	0.30000	0.29979	-0.06900
t_{stg} (us)	3.00000	3.00530	0.17667

Output Characteristics

Circuit Simulation Result

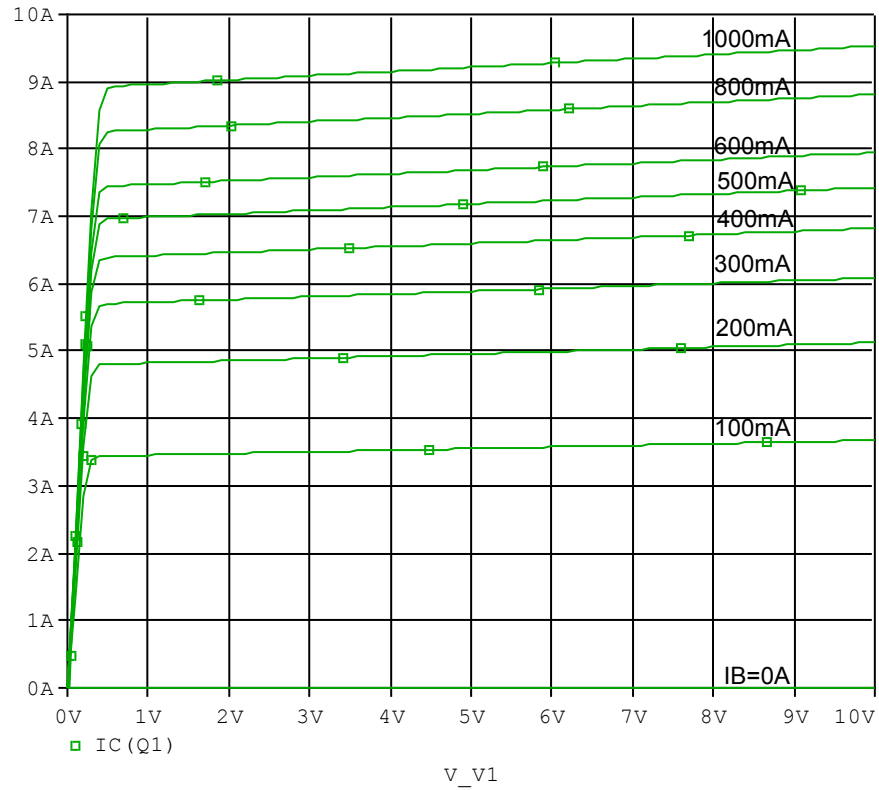

Evaluation Circuit

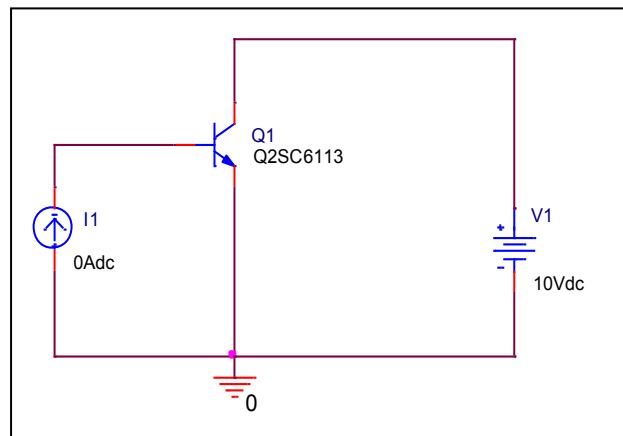

Output Characteristics

Reference

