

Device Modeling Report


COMPONENTS:MOSFET: OPERATIONAL AMPLIFIER
PART NUMBER:NJM12904V
MANUFACTURER: NEW JAPAN RADIO CO.,LTD



Bee Technologies Inc.


Output Voltage Swing, +Vout and –Vout

Simulation result

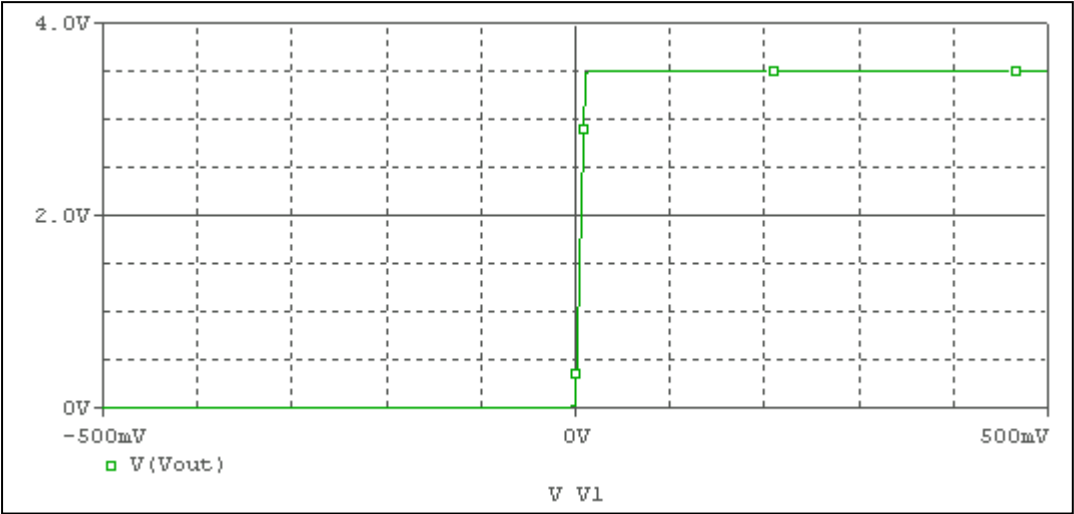

These simulation results are compared with $\pm V_{out}$


Evaluation circuit

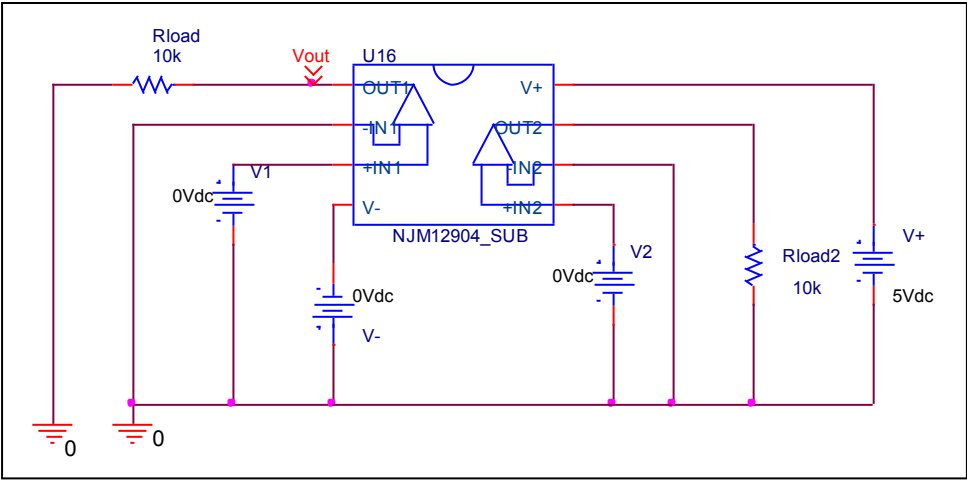


Output Voltage Swing	Data sheet	Simulation	%Error
+Vout(V)	3.5	3.492	0.228

Input Offset Voltage

Simulation result

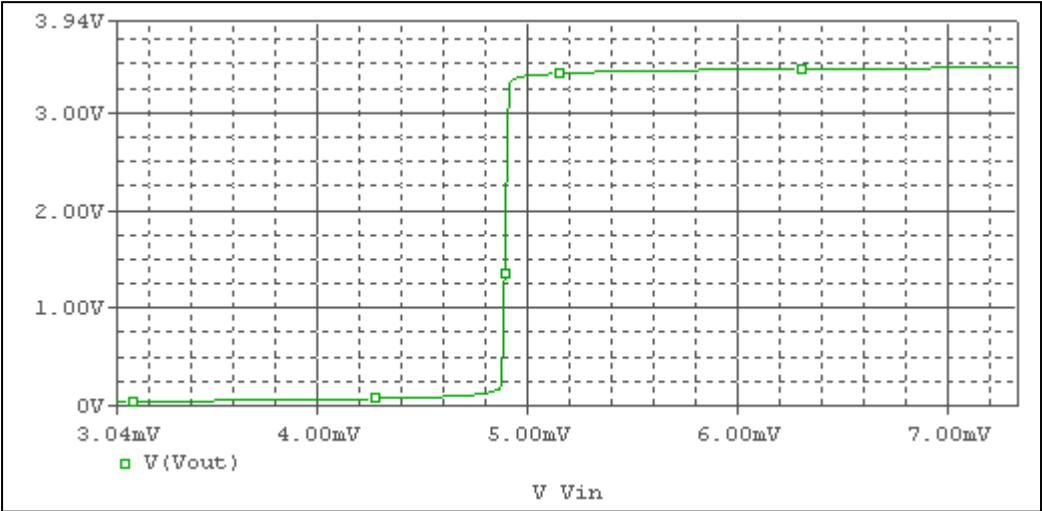


Evaluation circuit

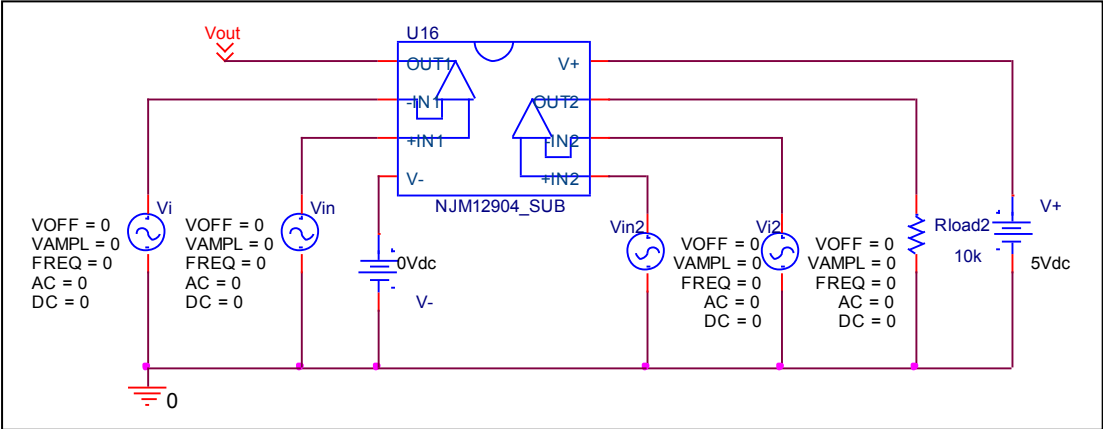


Vos	Measurement		Simulation		Error	
	5	mV	4.89	mV	2.2	%

Slew Rate, +SR, -SR

Simulation result

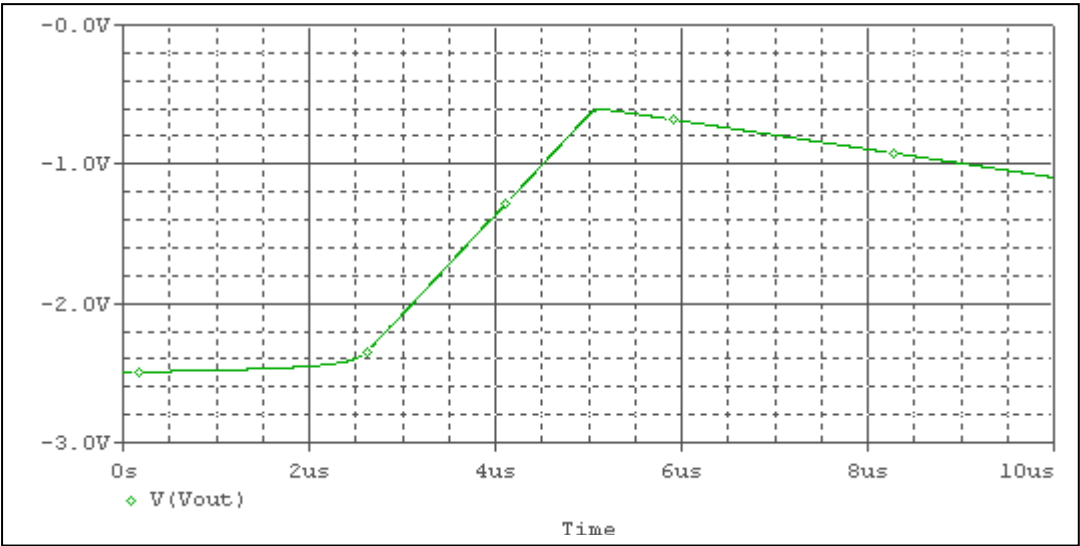


Evaluation circuit

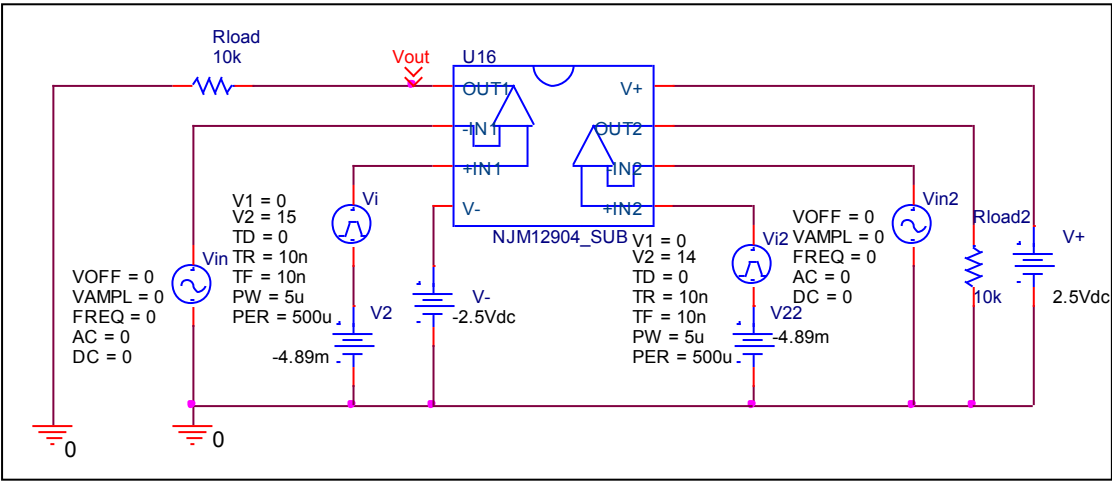


Slew Rate(v/us)	Data sheet	Simulation	%Error
	0.7V/us	0.707V/us	1

Input current Ib, Ibos

Simulation result

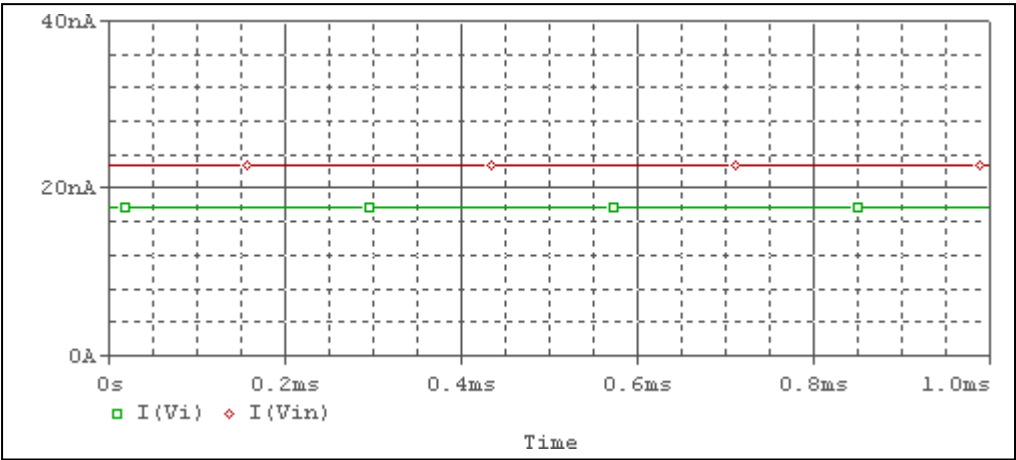


Evaluation circuit

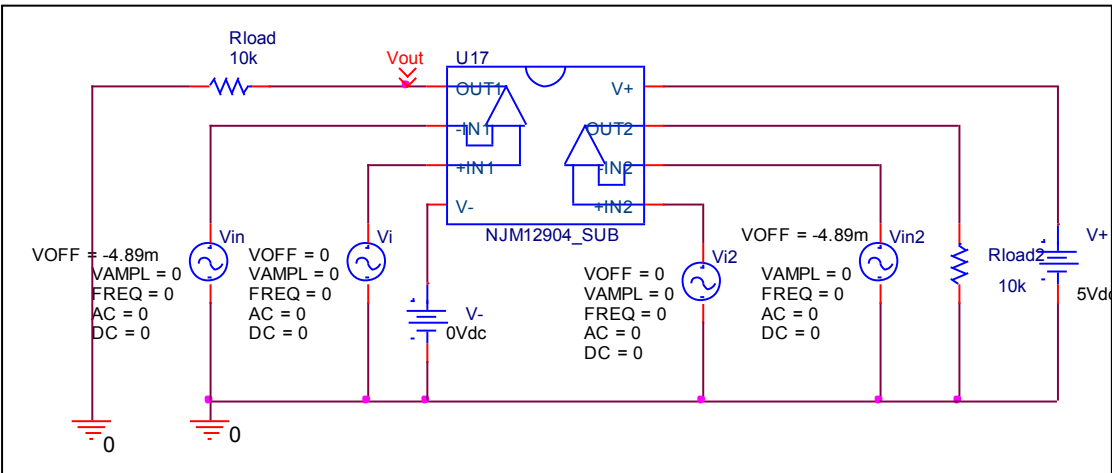


	Data sheet	Simulation	%Error
Ib(nA)	20	20.1	0.5
Ibos(nA)	5	4.98	0.4

Open Loop Voltage Gain vs. Frequency , Av-dc, f-0dB

Simulation result

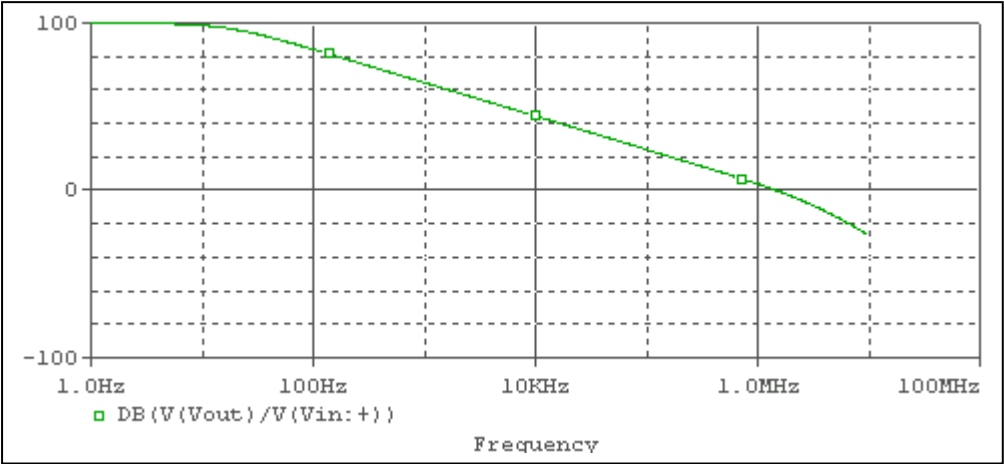


Evaluation circuit

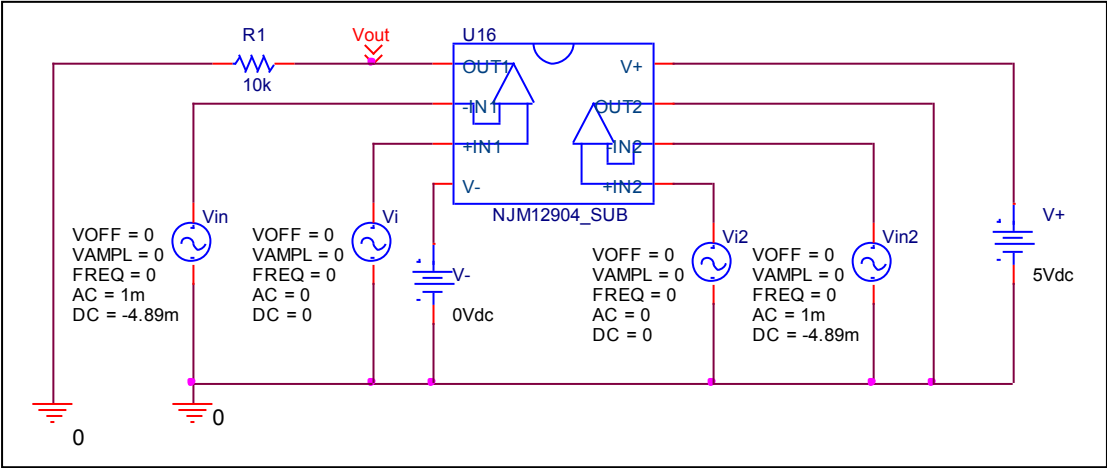


	Data sheet	Simulation	%Error
f-0dB(MHz)	1.5	1.476	1.6
Av-dc(dB)	100	99.896	0.104

Output Short Circuit Current - Ios

Simulation result

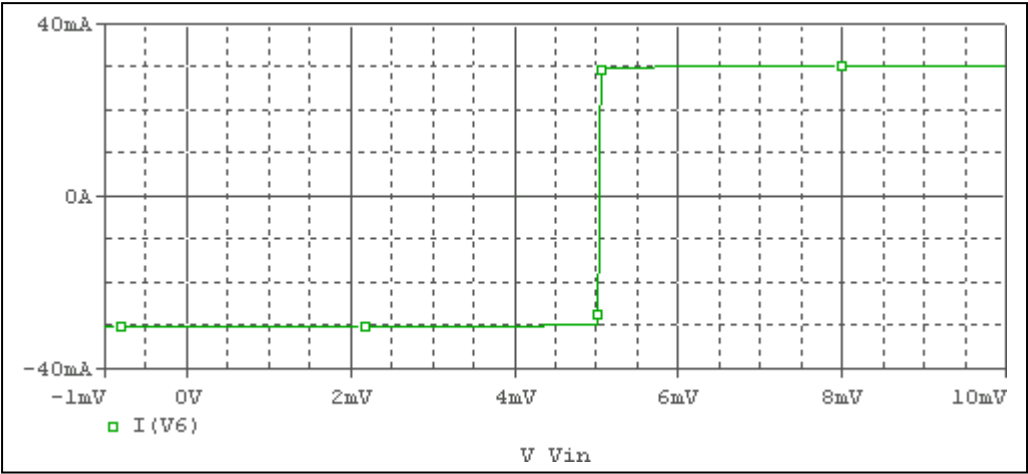


Evaluation circuit

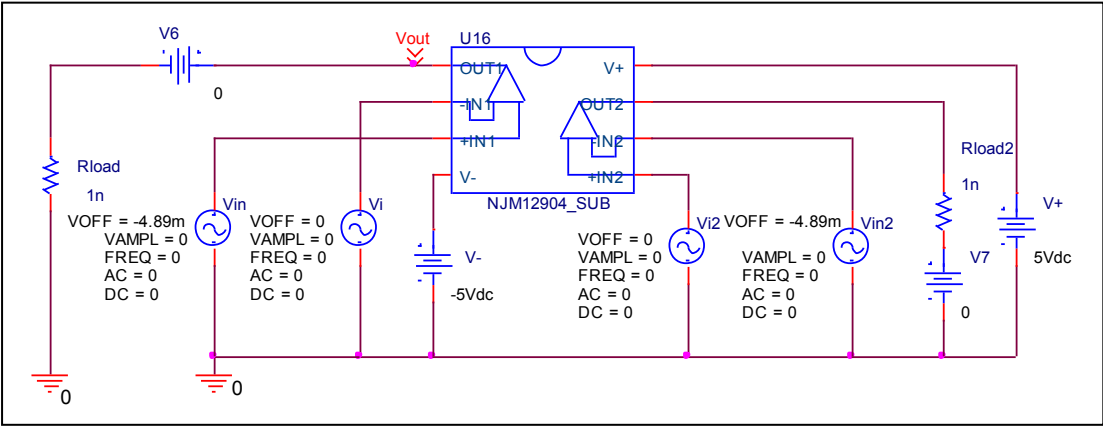


Short Circuit Current	Data sheet	Simulation	%Error
	30mA	30.03mA	0.1

Common-Mode Rejection Voltage gain

Simulation result

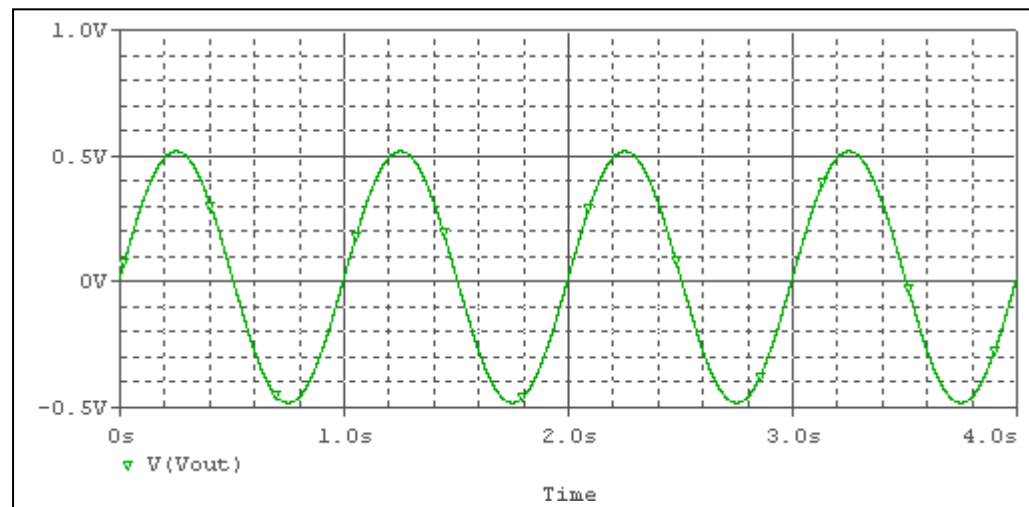

Evaluation circuit

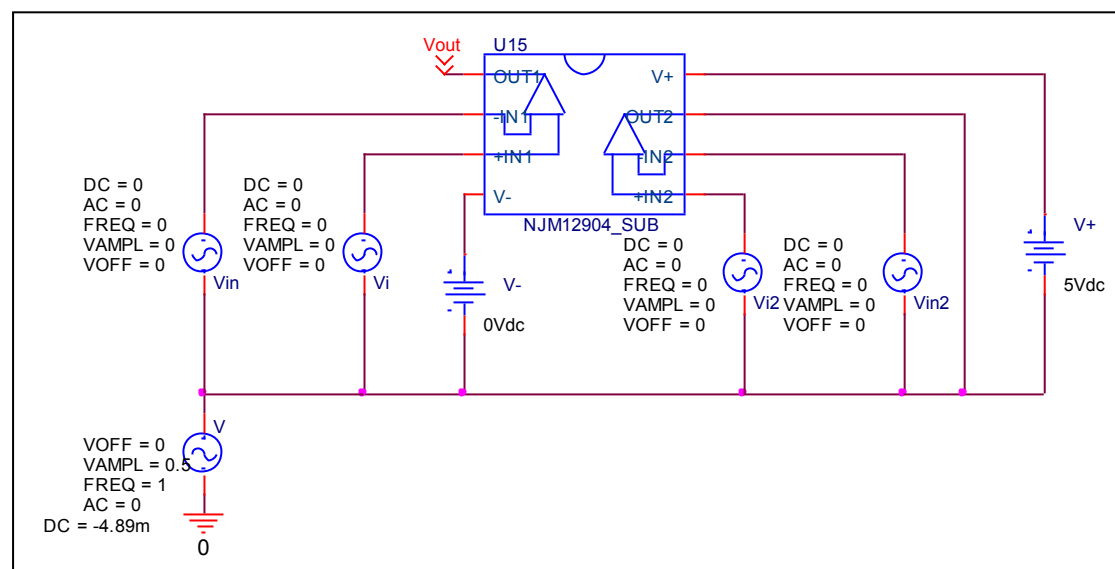

Common mode gain=5.6236/1

Common Mode Reject Ratio=98809/5.6236=17570

CMRR(dB)	Data sheet	Simulation	%Error
	85	84.89	0.129