

Device Modeling Report


COMPONENTS: OPERATIONAL AMPLIFIER
PART NUMBER: NJM2162V
MANUFACTURER: NEW JAPAN RADIO CO.,LTD



Bee Technologies Inc.


Output Voltage Swing, +Vout and –Vout

Simulation result

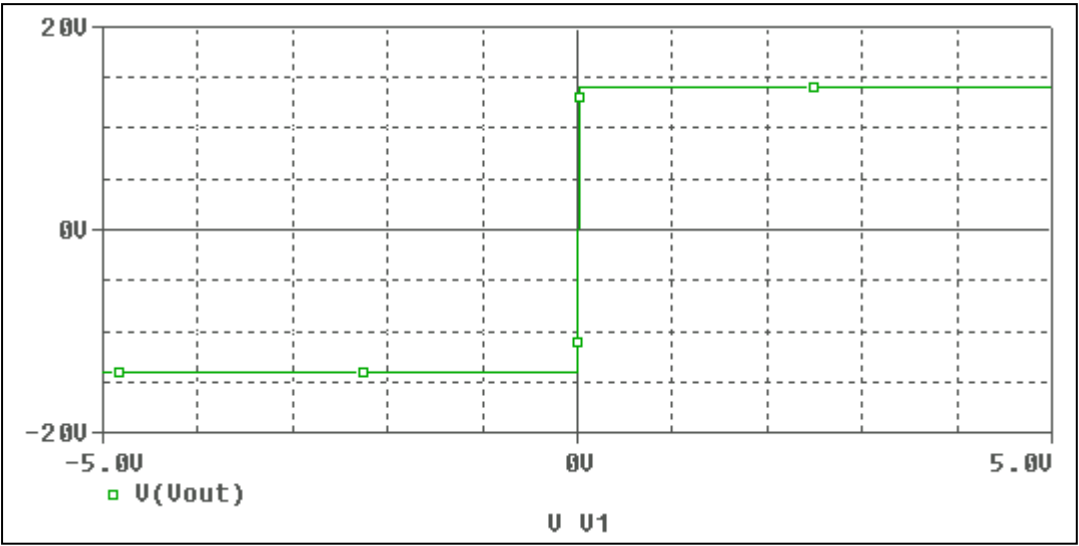

These simulation results are compared with $\pm V_{out}$


Evaluation circuit

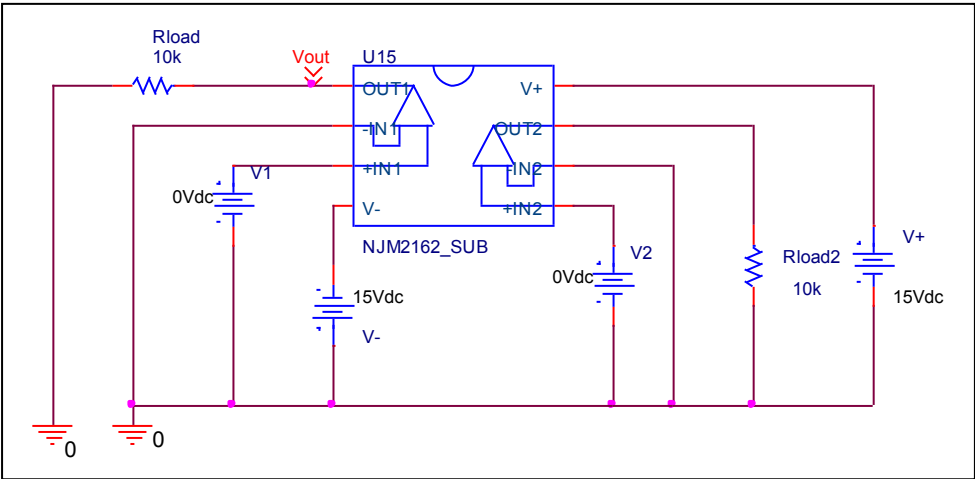


Output Voltage Swing	Data sheet	Simulation	%Error
+Vout(V)	+14	+13.972	0.2
-Vout(V)	-14	-13.972	0.2

Slew Rate, +SR, -SR

Simulation result

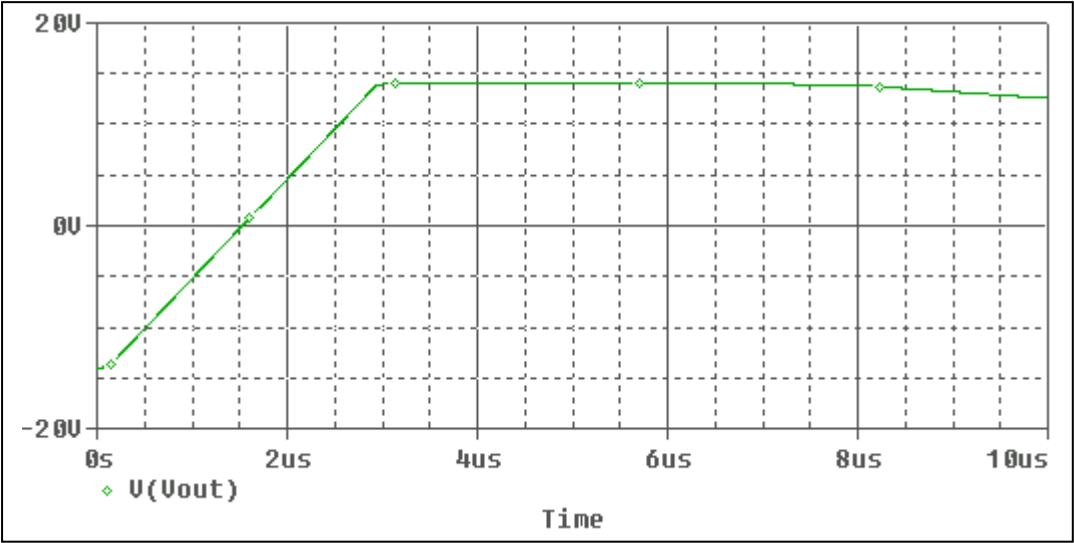


Evaluation circuit

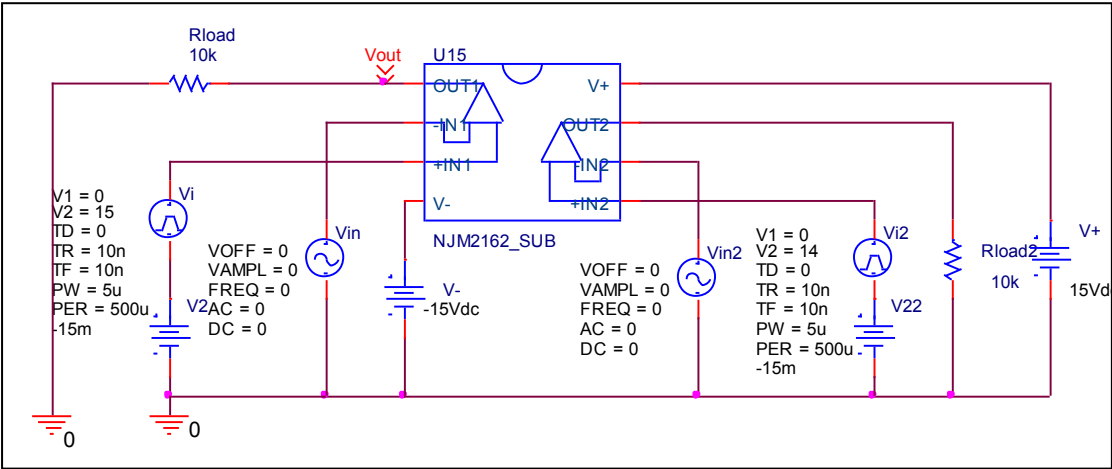


Slew Rate(v/us)	Data sheet	Simulation	%Error
	10V/us	9.85V/us	1.5

Input current Ib, Ibos

Simulation result

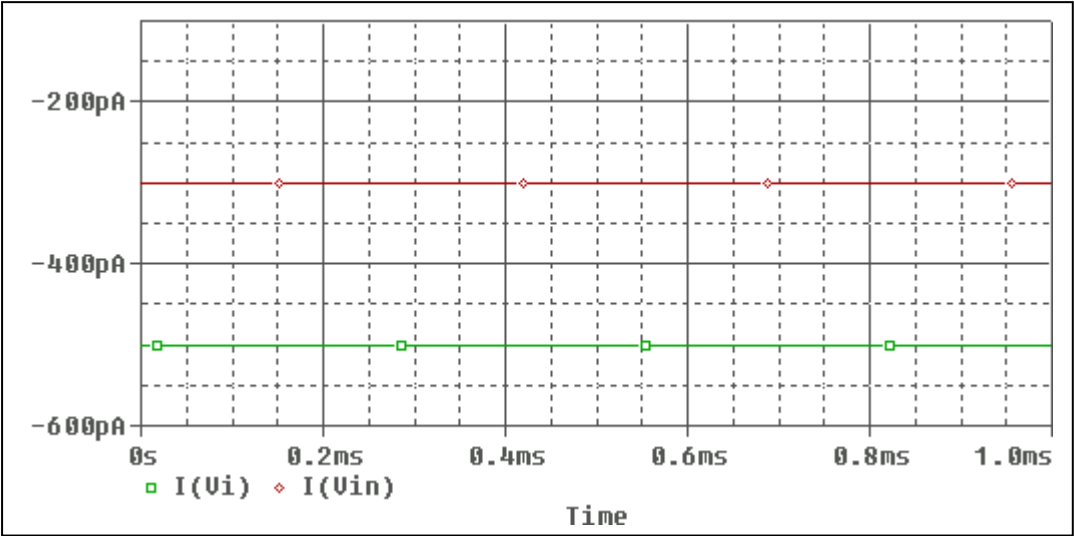


Evaluation circuit

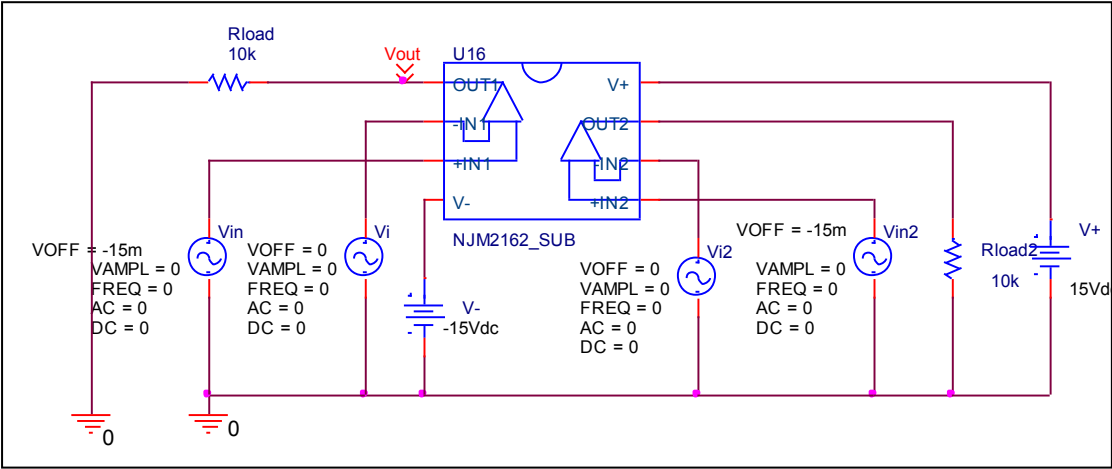


	Data sheet	Simulation	%Error
Ib(pA)	400	400	0
Ibos(pA)	200	200	0

Open Loop Voltage Gain vs. Frequency , Av-dc, f-0dB

Simulation result

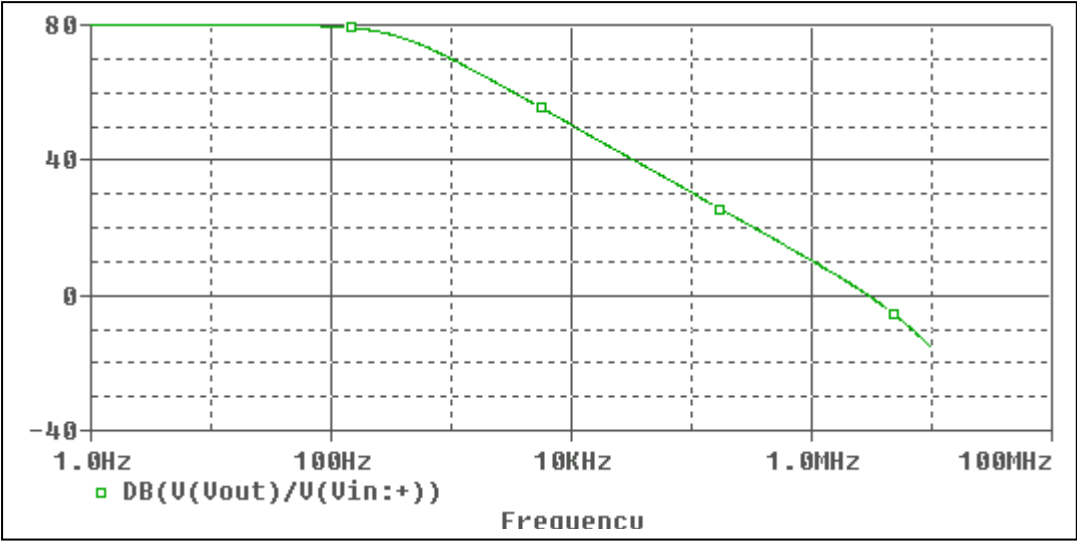


Evaluation circuit

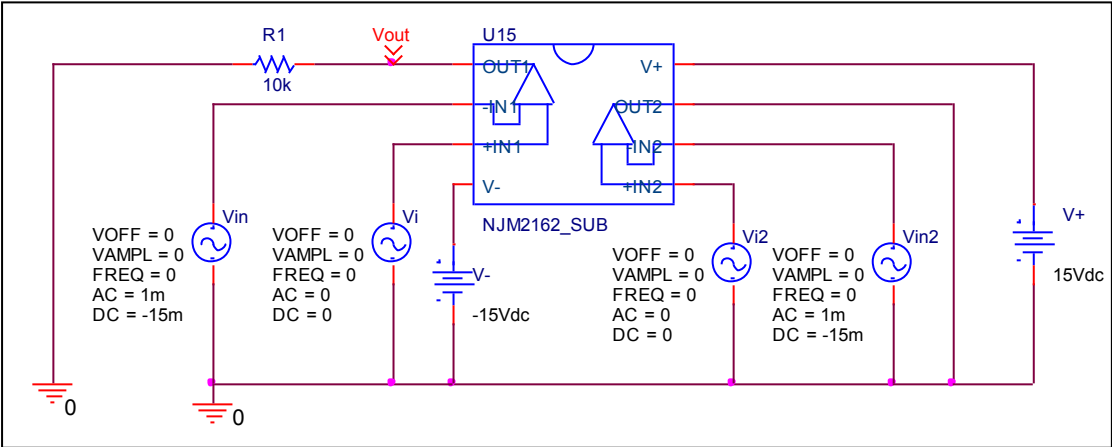


	Data sheet	Simulation	%Error
f-0dB(MHz)	3	2.95	1.667
Av-dc	80	79.95	0.062

Common-Mode Rejection Voltage gain

Simulation result

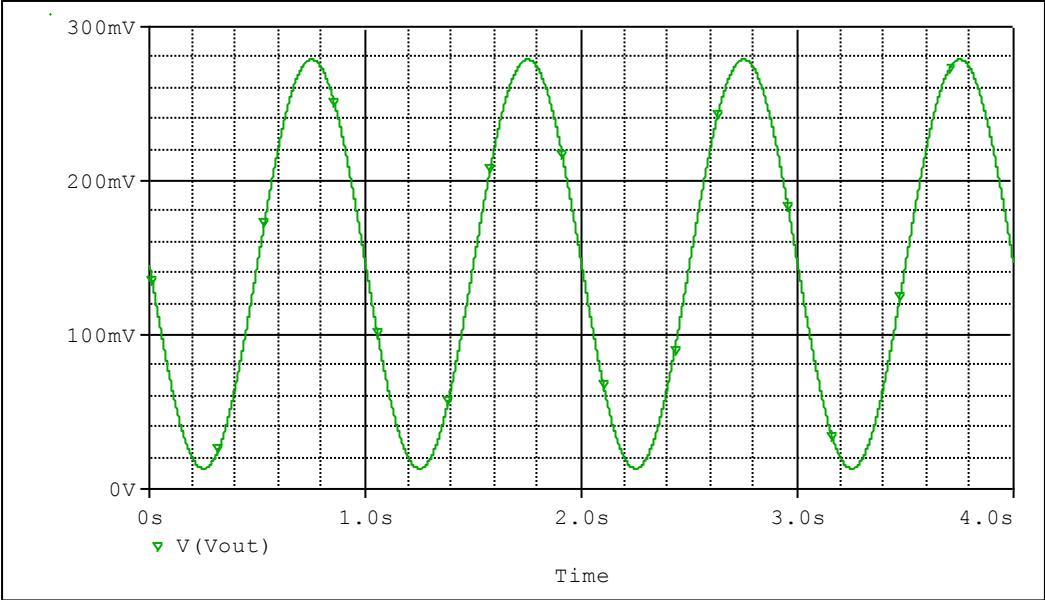

Evaluation circuit

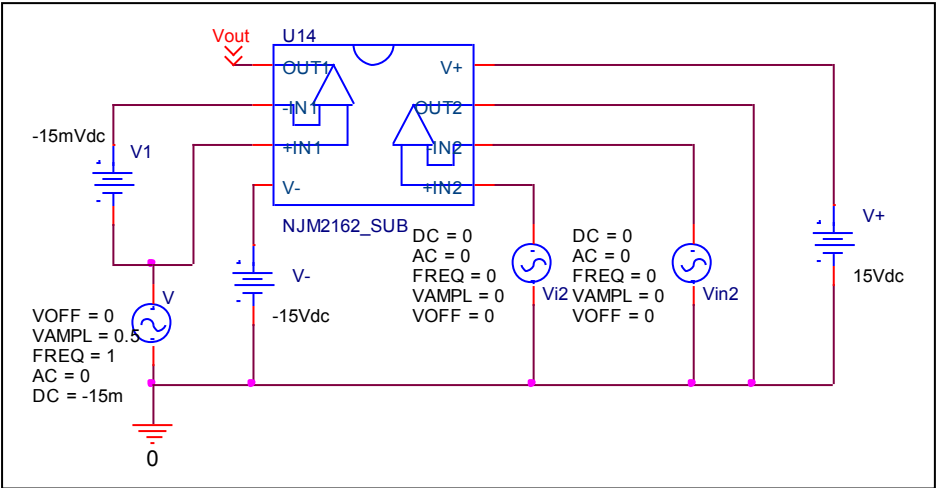

Common Mode Reject Ratio= $9942/0.265=37516.981$

CMRR	Data sheet	Simulation	%Error
	90	91.484	1.648