

Device Modeling Report


COMPONENTS: OPERATIONAL AMPLIFIER
PART NUMBER:NJM2740
MANUFACTURER: NEW JAPAN RADIO CO.,LTD




Bee Technologies Inc.

Output Voltage Swing

Simulation result

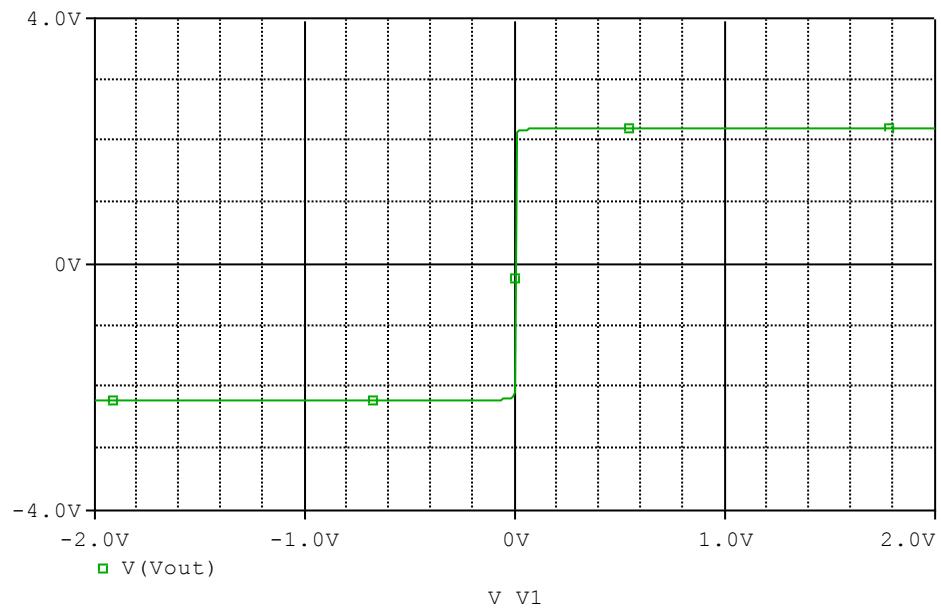


Evaluation circuit

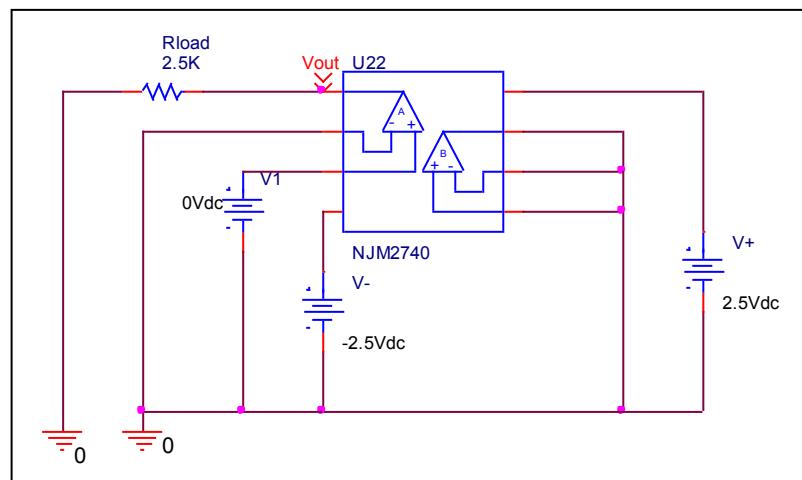


Output Voltage Swing	Data sheet	Simulation	%Error
+ $V_{out}(V)$	2.200	2.199	-0.045
- $V_{out}(V)$	-2.200	-2.199	-0.045

Input Offset Voltage

Simulation result

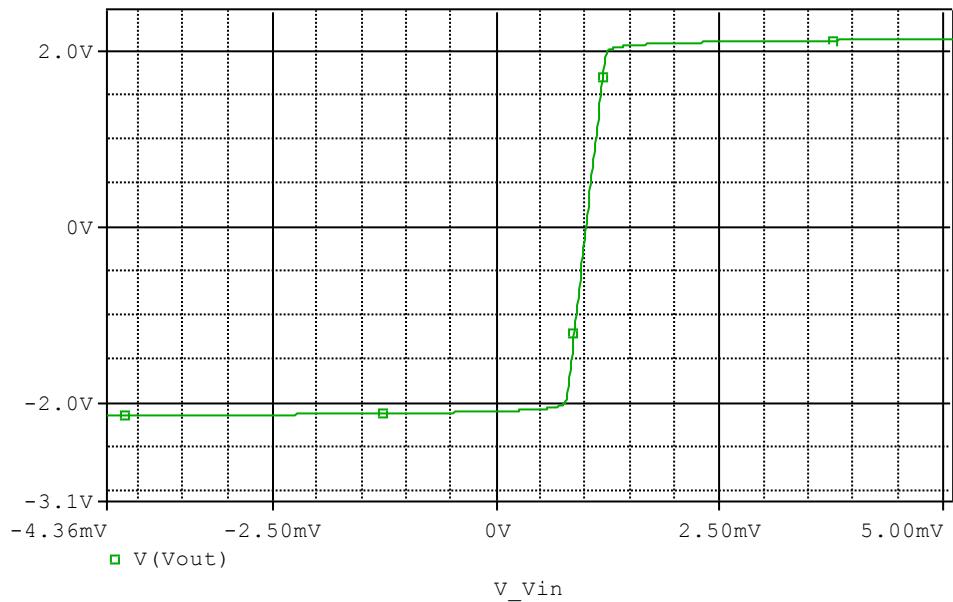


Evaluation circuit

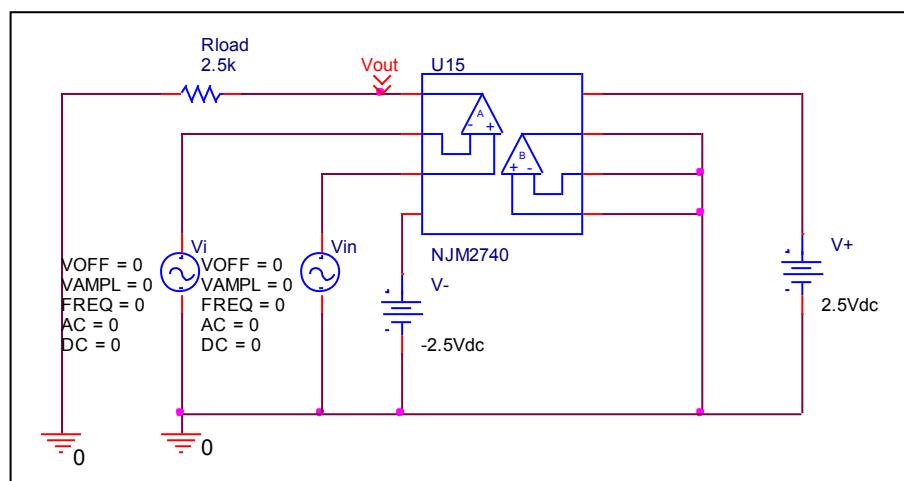


Vos	Measurement		Simulation		Error	
	1.000	mV	1.000	mV	0.000	%

Slew Rate

Simulation result

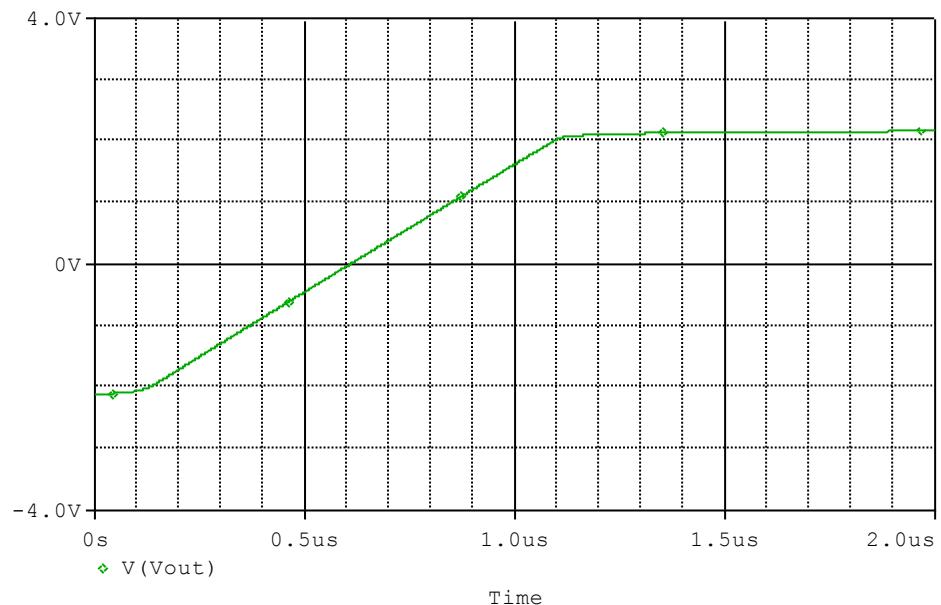


Evaluation circuit

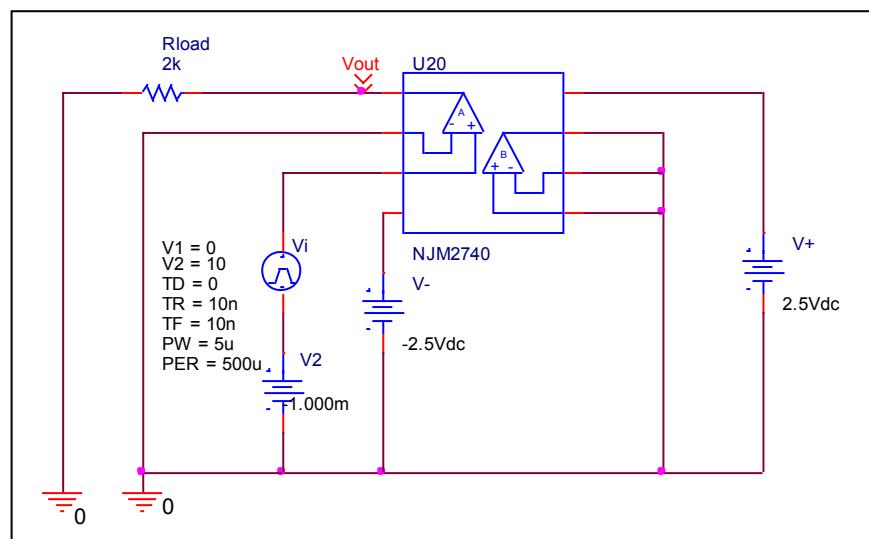


Slew Rate(v/us)	Data sheet	Simulation	%Error
	4.000	4.140	3.500

Input current

Simulation result

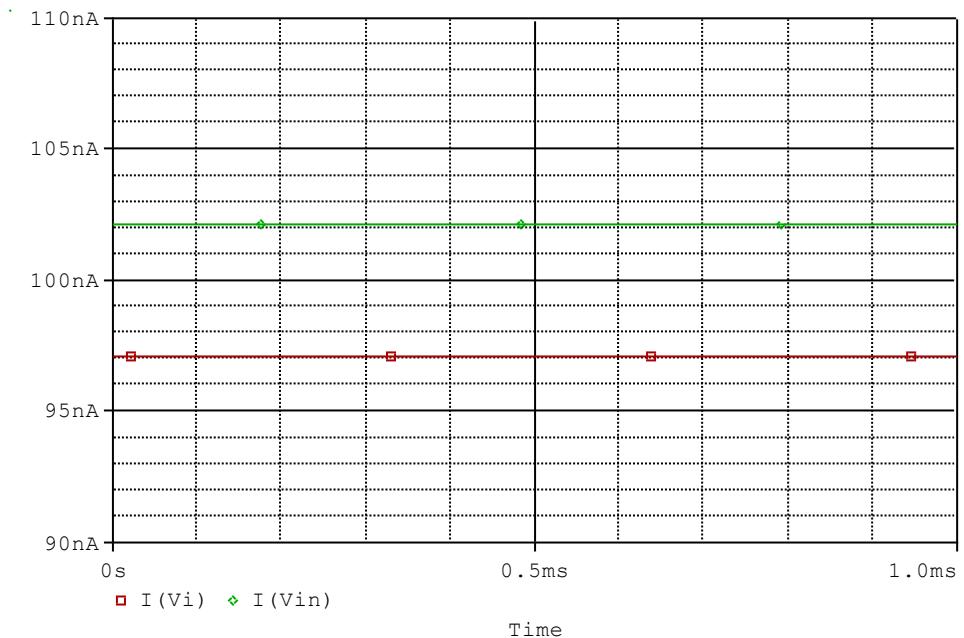


Evaluation circuit

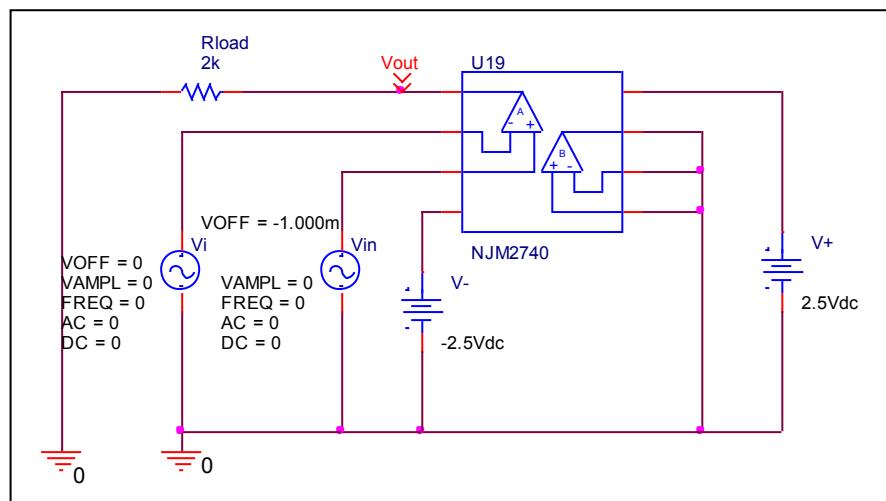


	Data sheet	Simulation	%Error
Ib(nA)	100.000	99.650	-0.350
Ibos(nA)	5.000	5.031	0.620

Open Loop Voltage Gain vs. Frequency

Simulation result

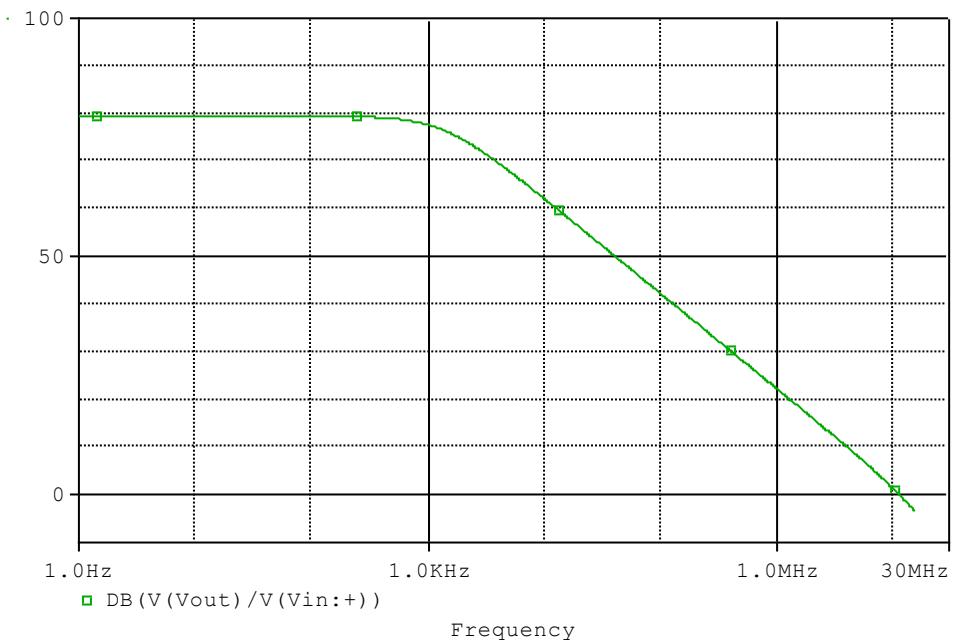


Evaluation circuit

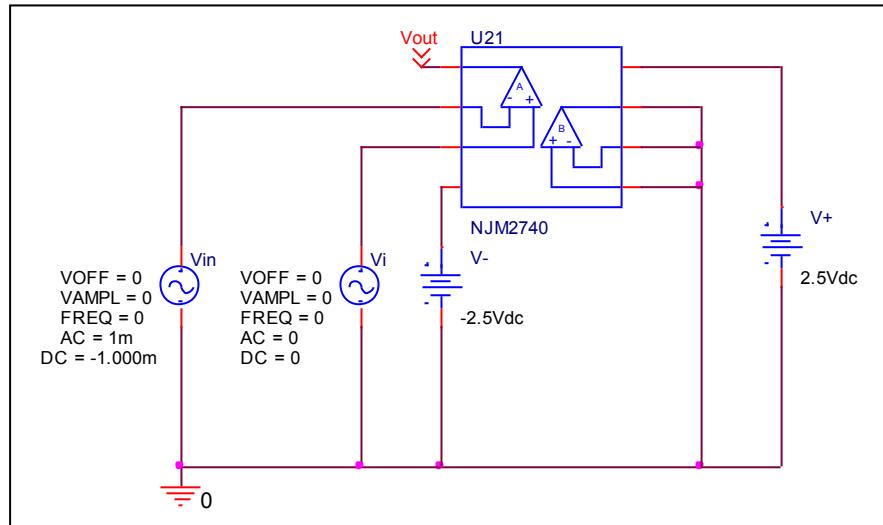


	Data sheet	Simulation	%Error
f-0dB(MHz)	12.000	11.576	-3.533
Av-dc(dB)	80.000	79.490	-0.638

Common-Mode Rejection Voltage gain

Simulation result

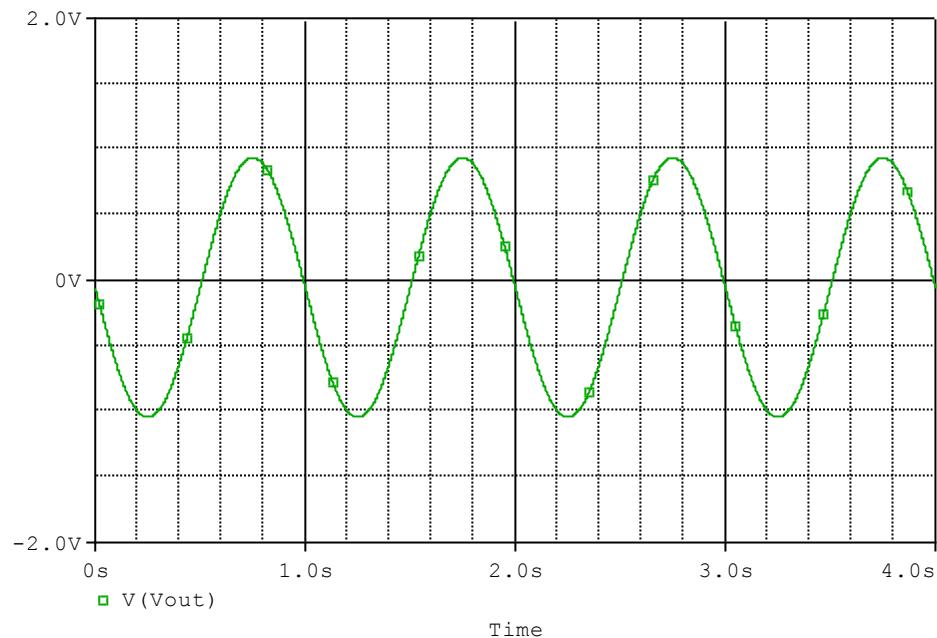

Evaluation circuit

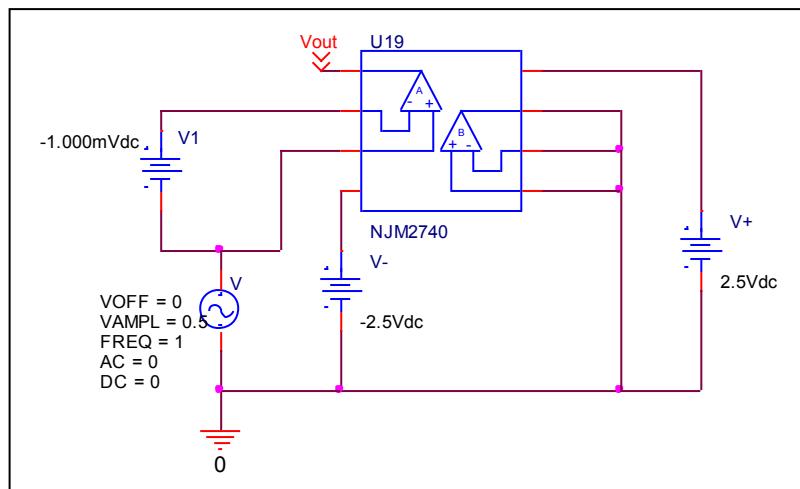

Common Mode Reject Ratio=9429.746/2.036=4631.505

CMRR	Data sheet	Simulation	%Error
	74.000	73.314	-0.927