

Device Modeling Report


COMPONENTS:MOSFET: OPERATIONAL AMPLIFIER
PART NUMBER:NJM2107F3
MANUFACTURER: NEW JAPAN RADIO CO.,LTD



Bee Technologies Inc.


Output Voltage Swing, +Vout and –Vout

Simulation result

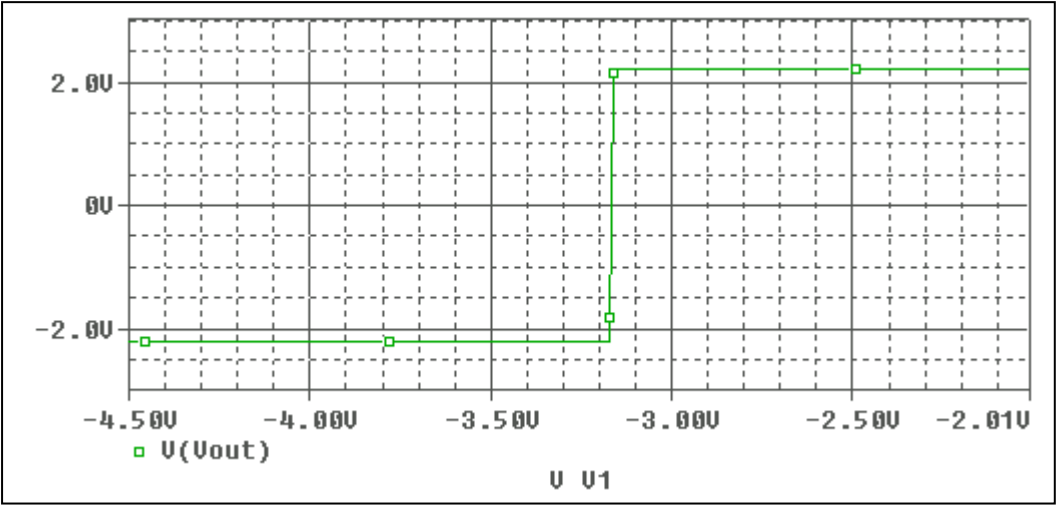

These simulation results are compared with $\pm V_{out}$


Evaluation circuit

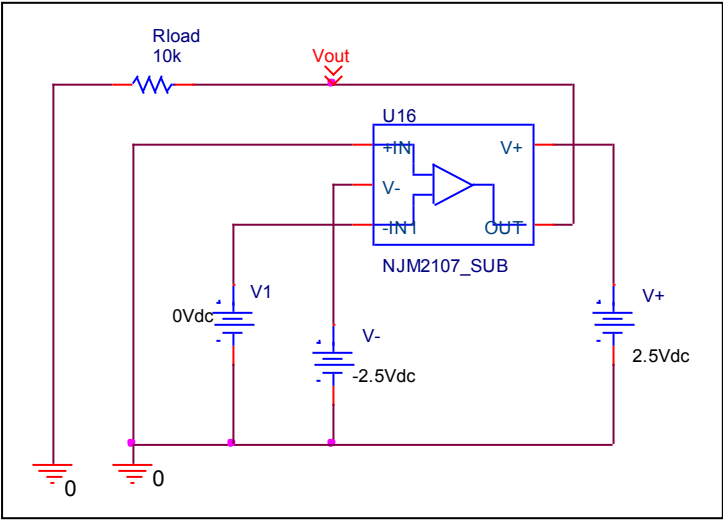


Output Voltage Swing	Data sheet	Simulation	%Error
+Vout(V)	+2.2	+2.206	0.27
-Vout(V)	-2.2	-2.206	0.27

Input Offset Voltage

Simulation result

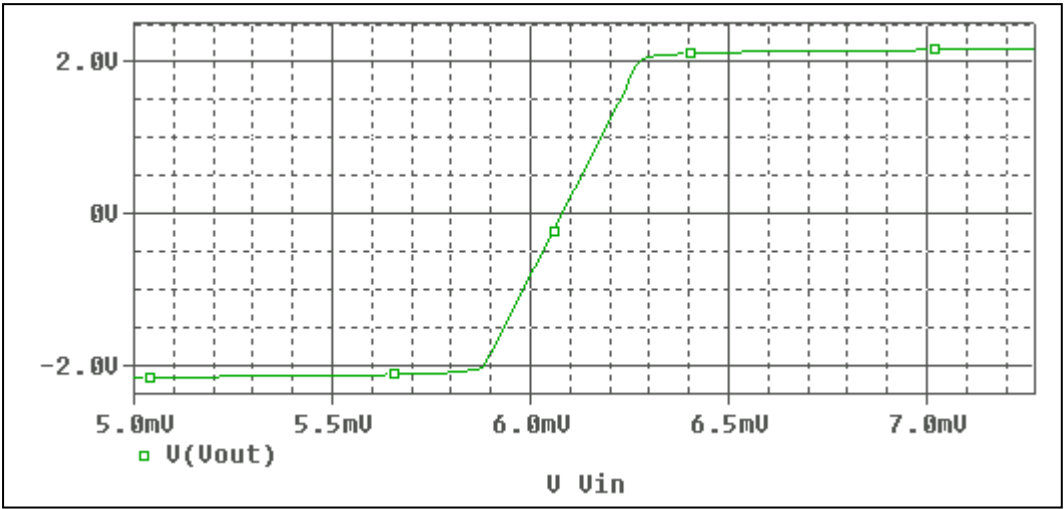


Evaluation circuit

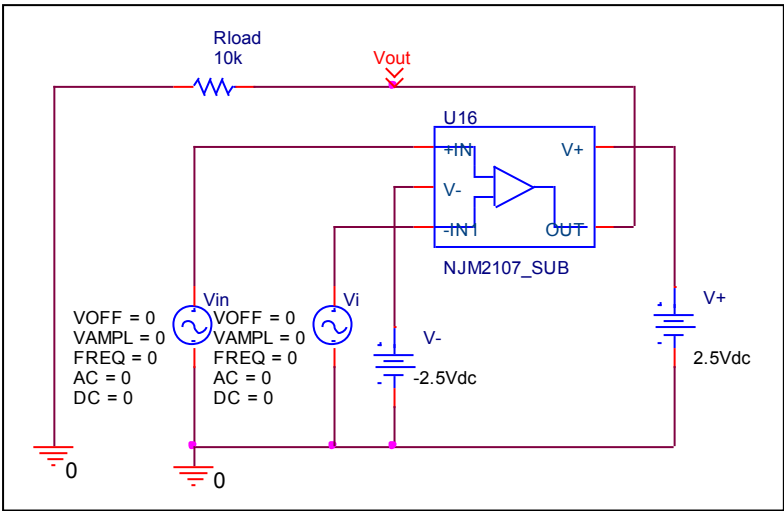


Vos	Measurement		Simulation		Error	
	6	mV	6.08	mV	1.33	%

Slew Rate, +SR, -SR

Simulation result

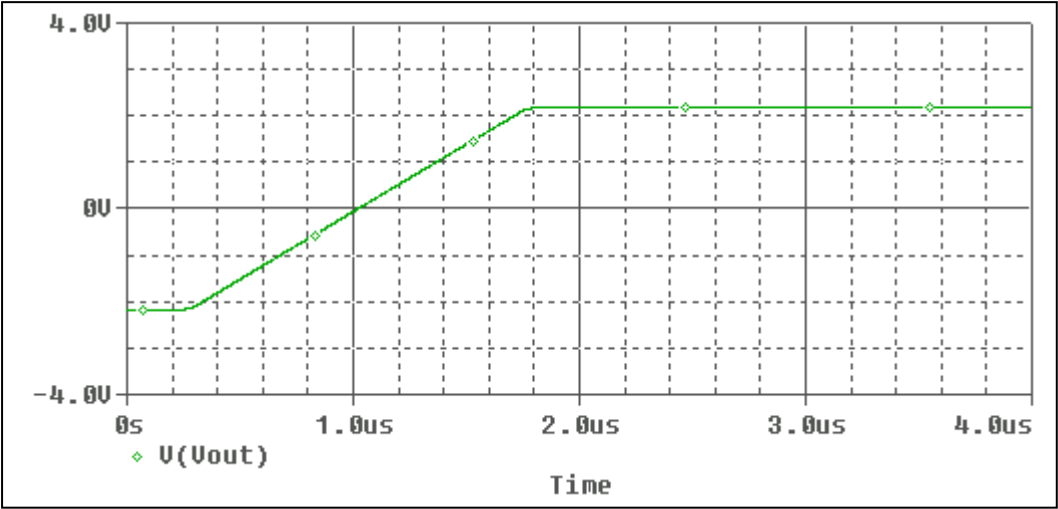


Evaluation circuit

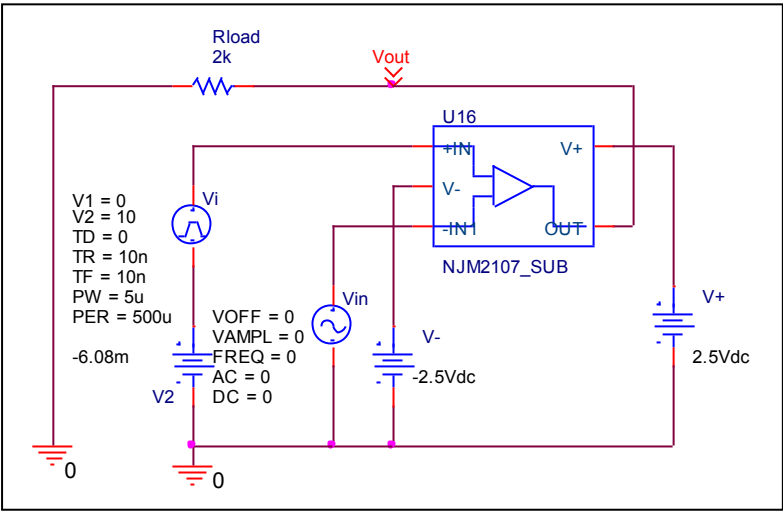


Slew Rate(v/us)	Data sheet	Simulation	%Error
	3V/us	2.94V/us	2

Input current Ib, Ibos

Simulation result

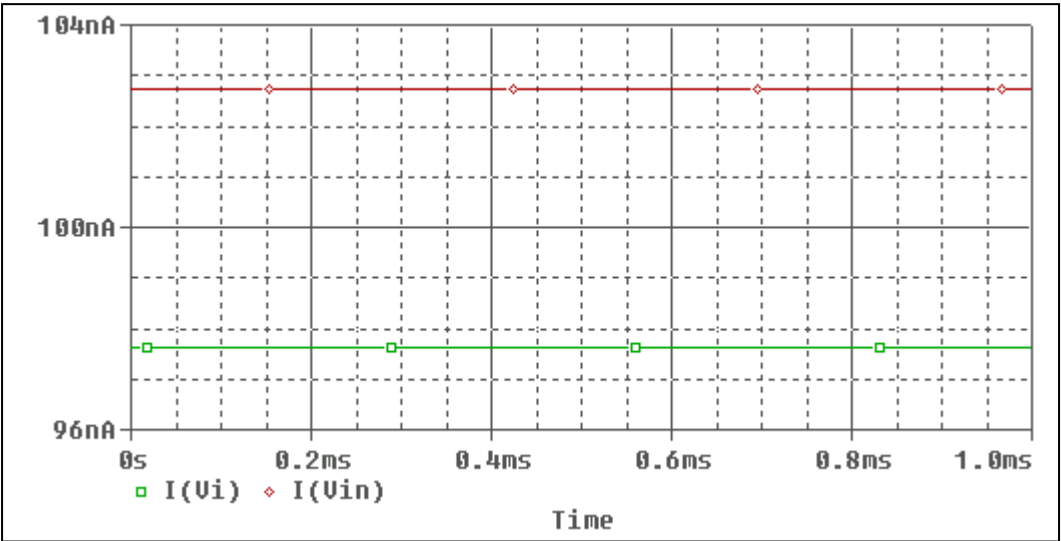


Evaluation circuit

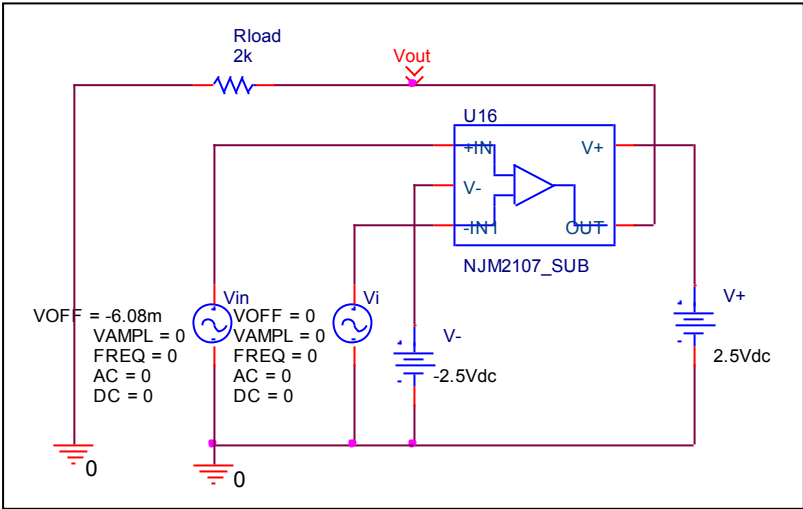


	Data sheet	Simulation	%Error
Ib(nA)	100	100.15	0.15
Ibos(nA)	5	5.09	1.8

Open Loop Voltage Gain vs. Frequency , Av-dc, f-0dB

Simulation result

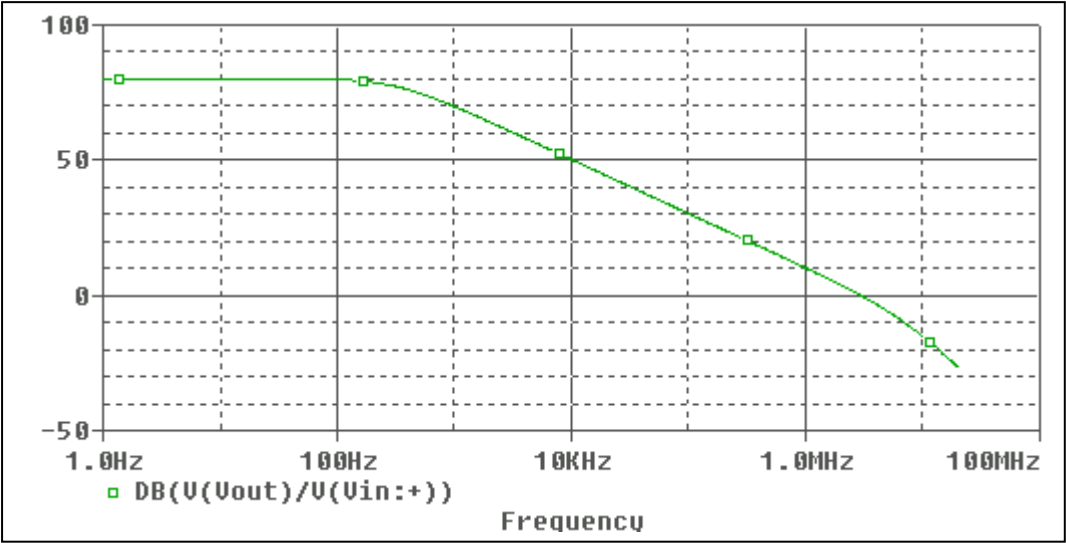


Evaluation circuit

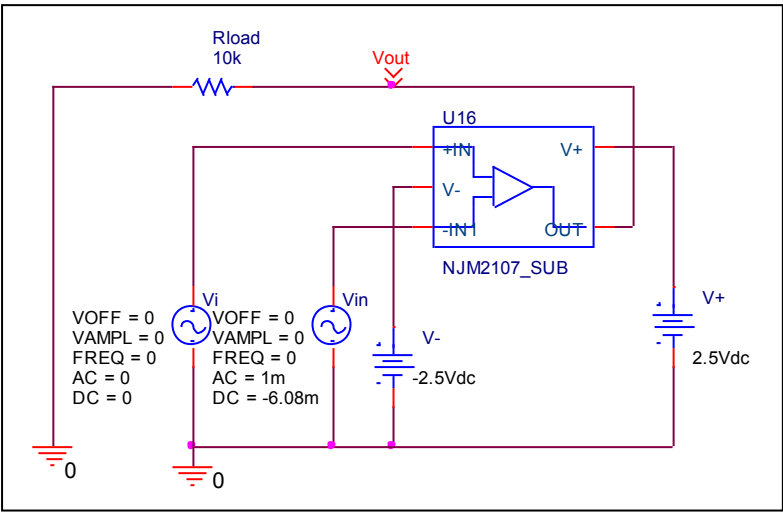


	Data sheet	Simulation	%Error
f-0dB(MHz)	3	2.973	0.9
Av-dc(dB)	80	80.074	0.092

Common-Mode Rejection Voltage gain

Simulation result

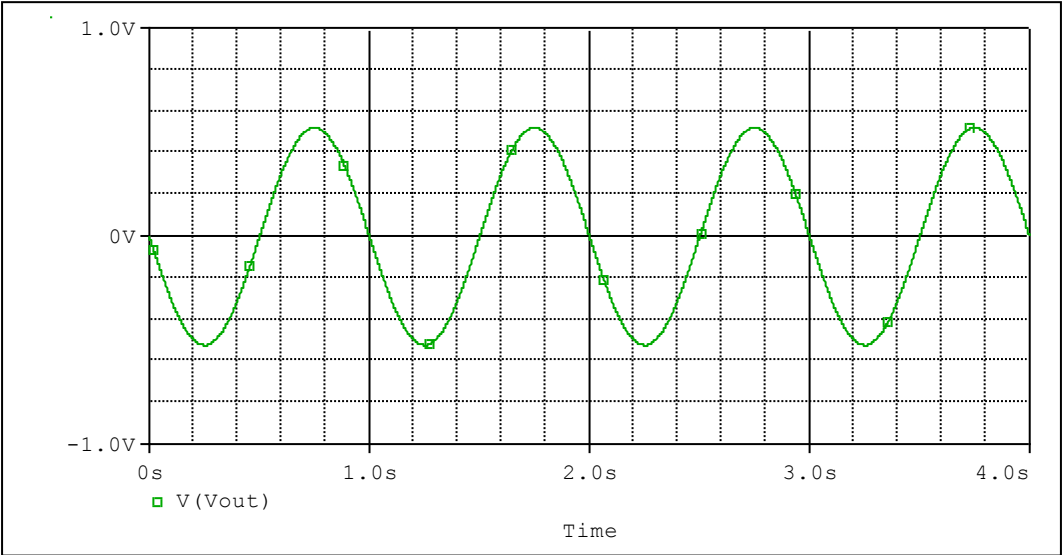

Evaluation circuit

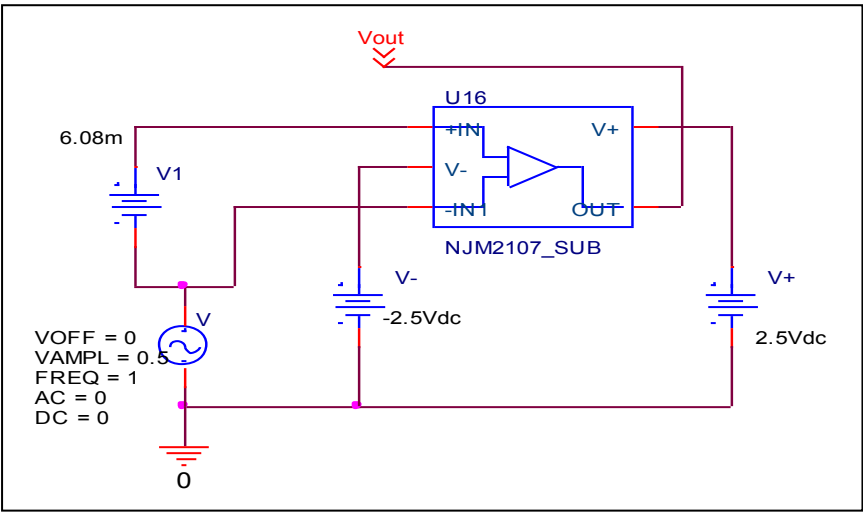

Common Mode Reject Ratio= $10085/1.0432=9667.369$

CMRR	Data sheet	Simulation	%Error
	80	79.706	-0.367