

Device Modeling Report


COMPONENTS:MOSFET: OPERATIONAL AMPLIFIER
PART NUMBER:NJM2902V
MANUFACTURER: NEW JAPAN RADIO CO.,LTD



Bee Technologies Inc.


Output Voltage Swing, +Vout and –Vout

Simulation result

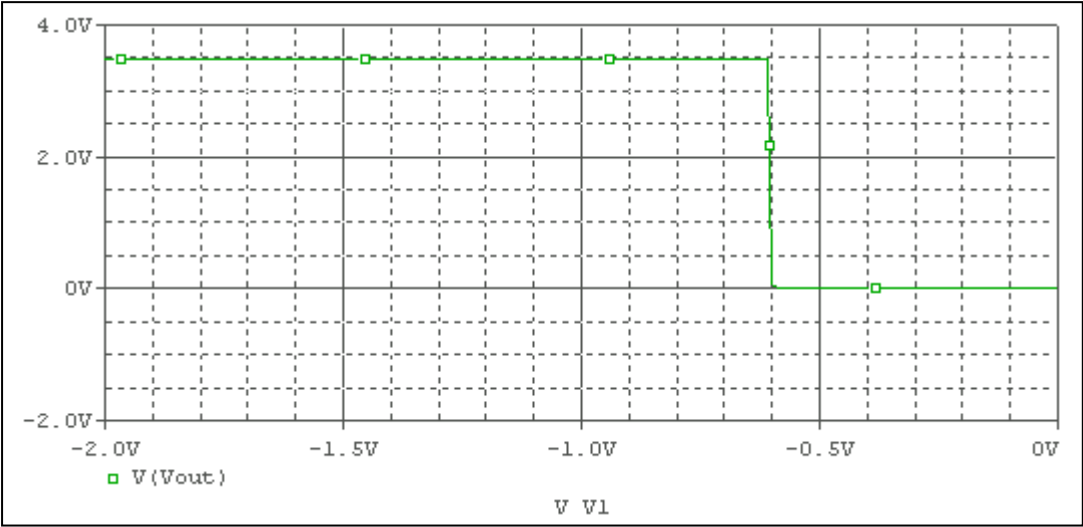

These simulation results are compared with $\pm V_{out}$


Evaluation circuit

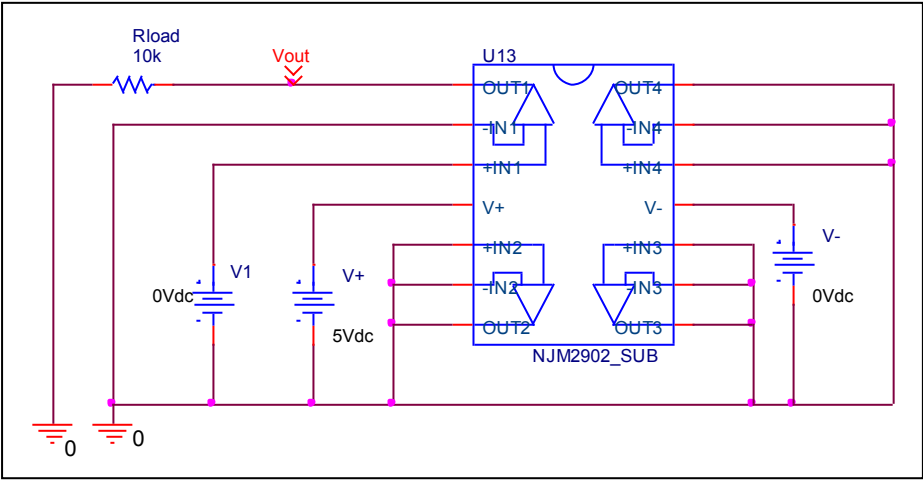


Output Voltage Swing	Data sheet	Simulation	%Error
+Vout(V)	3.5	3.494	0.171
-Vout(V)	0	0	0

Input Offset Voltage

Simulation result

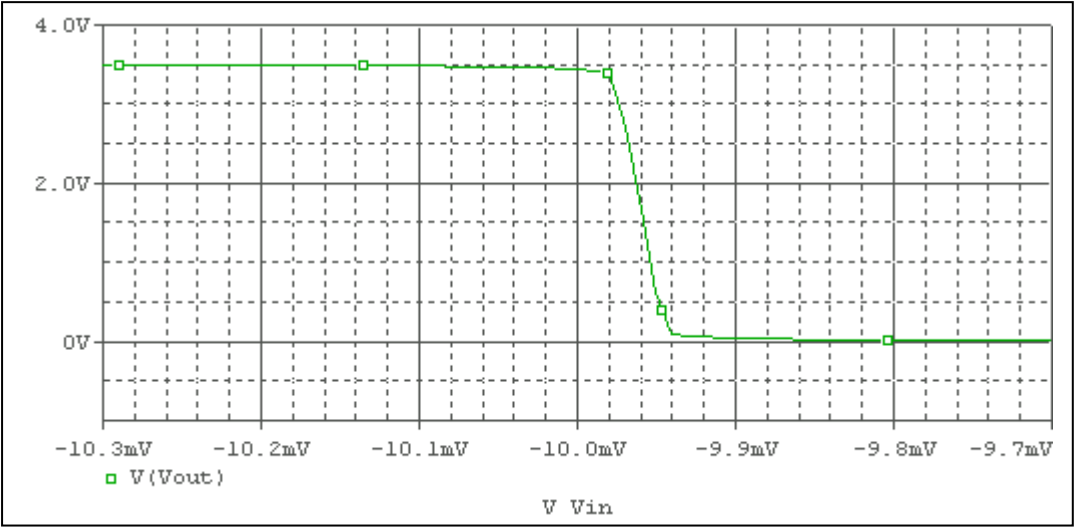


Evaluation circuit

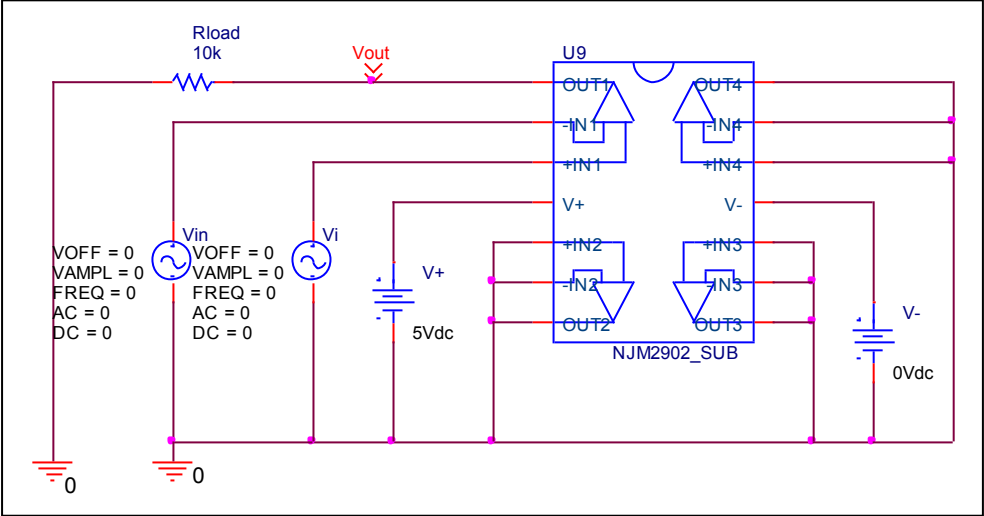


Vos	Measurement		Simulation		Error	
	10	mV	9.96	mV	0.4	%

Slew Rate, +SR, -SR

Simulation result

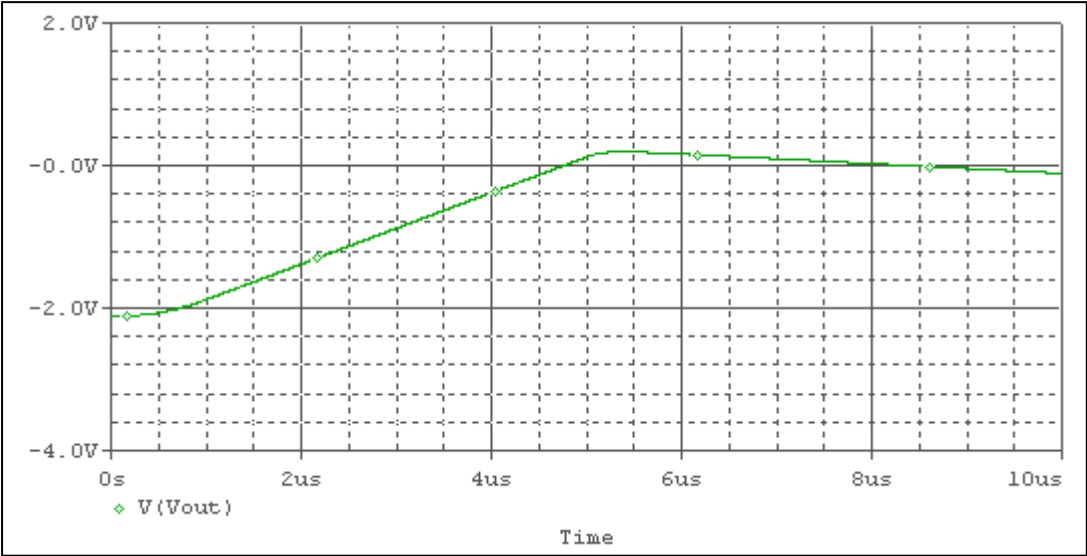


Evaluation circuit

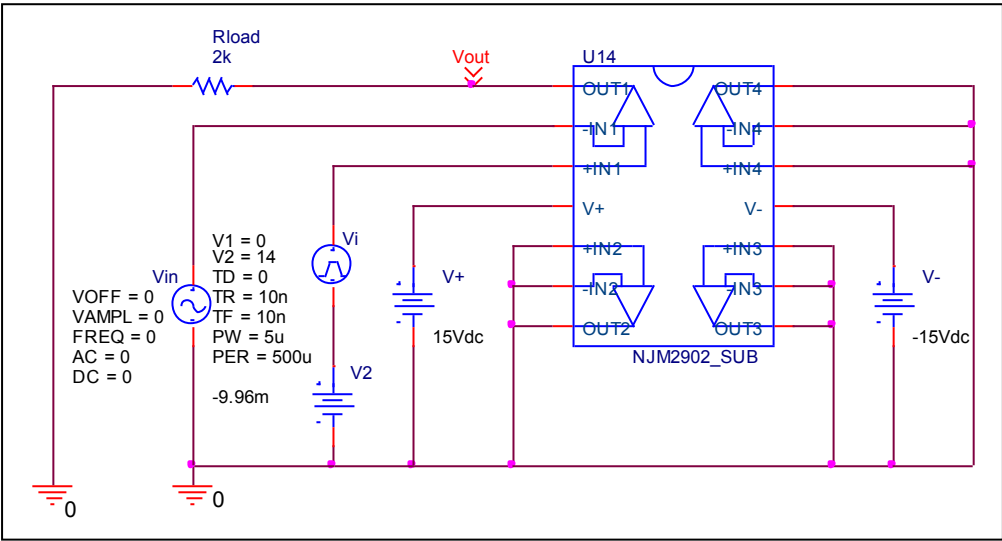


Slew Rate(v/us)	Data sheet	Simulation	%Error
	0.5V/us	0.5V/us	0

Input current Ib, Ibos

Simulation result

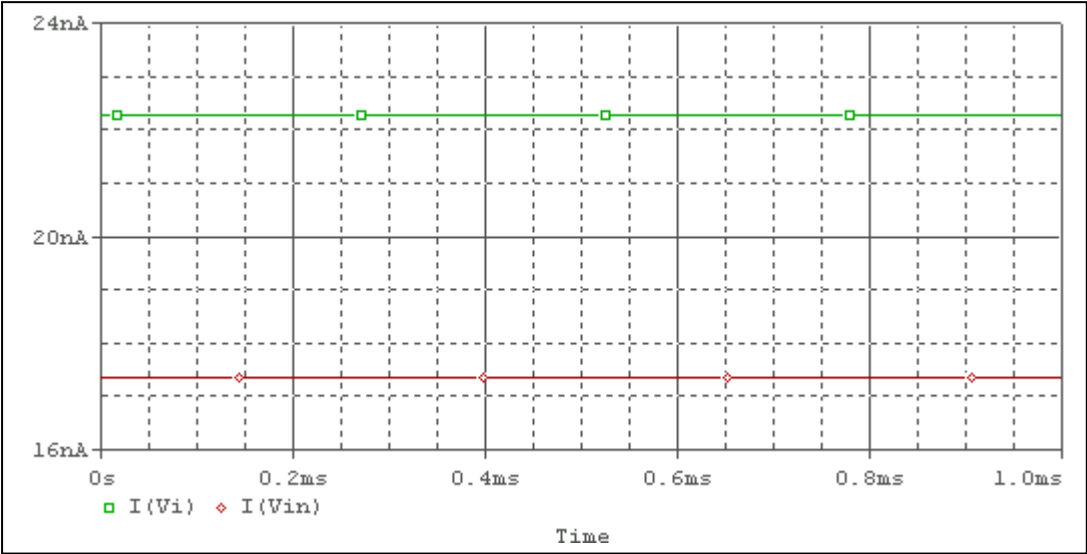


Evaluation circuit

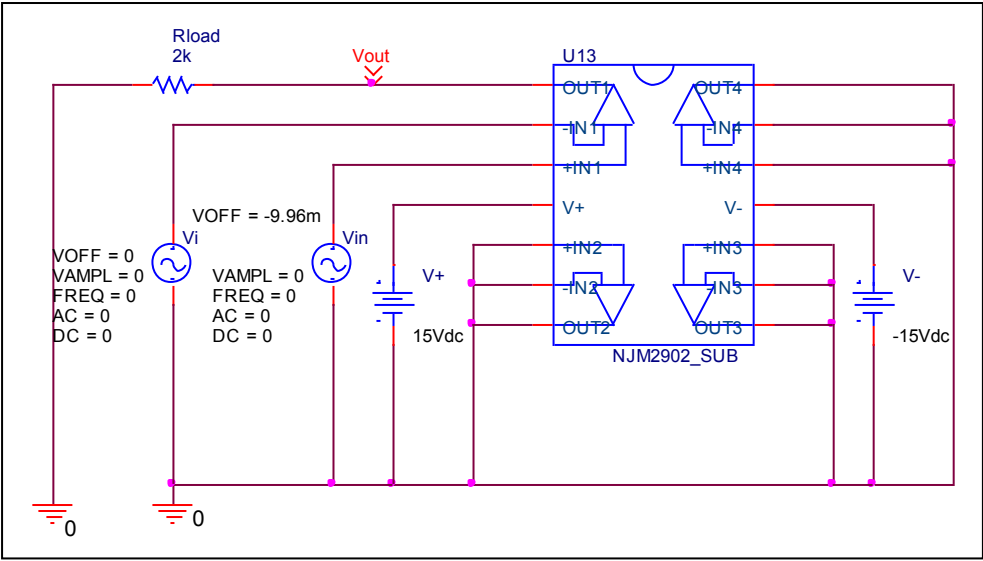


	Data sheet	Simulation	%Error
Ib(nA)	20	19.811	0.945
Ibos(nA)	5	4.91	1.8

Open Loop Voltage Gain vs. Frequency , Av-dc, f-0dB

Simulation result

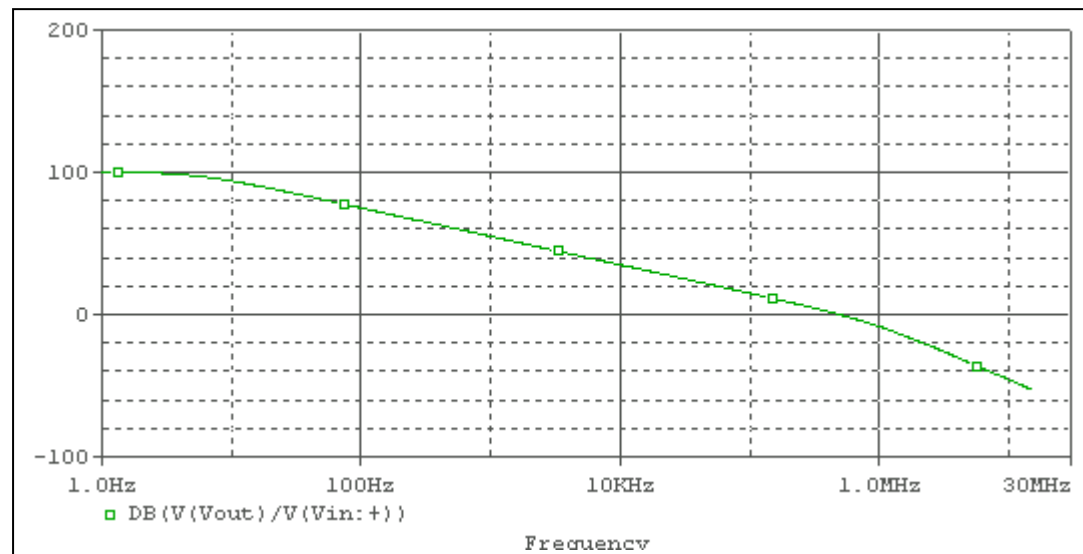


Evaluation circuit

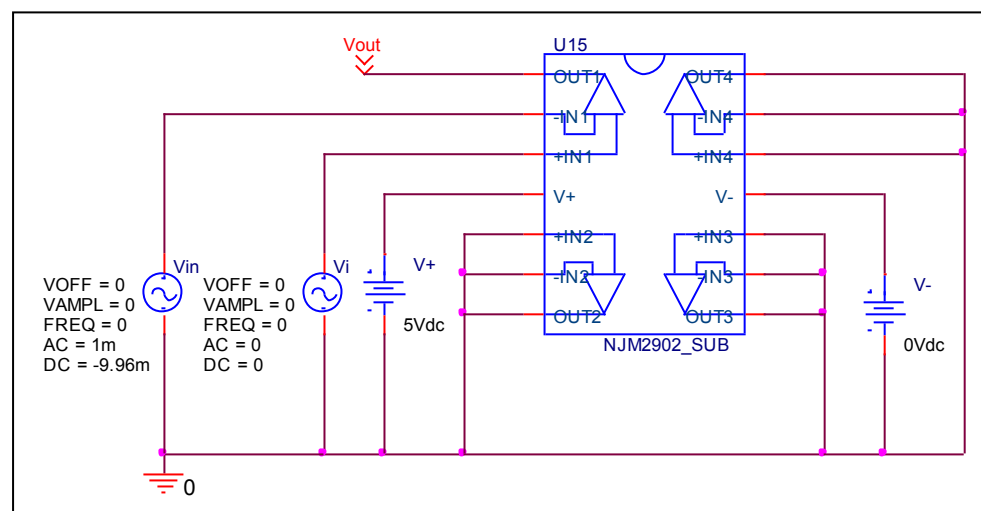


	Data sheet	Simulation	%Error
f-0dB(MHz)	0.5	0.49	2
Av-dc(dB)	100	100.207	0.207

Output Short Circuit Current - Ios

Simulation result

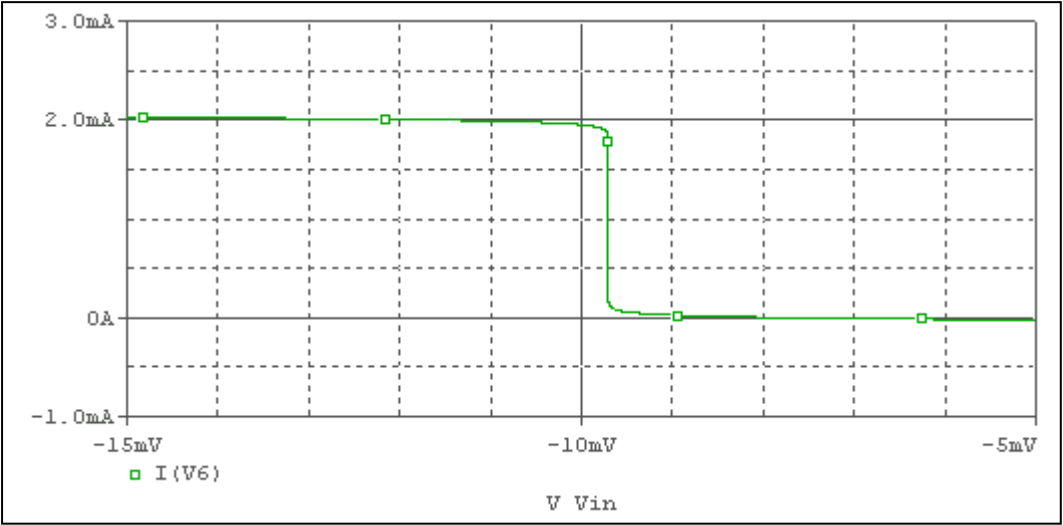


Evaluation circuit

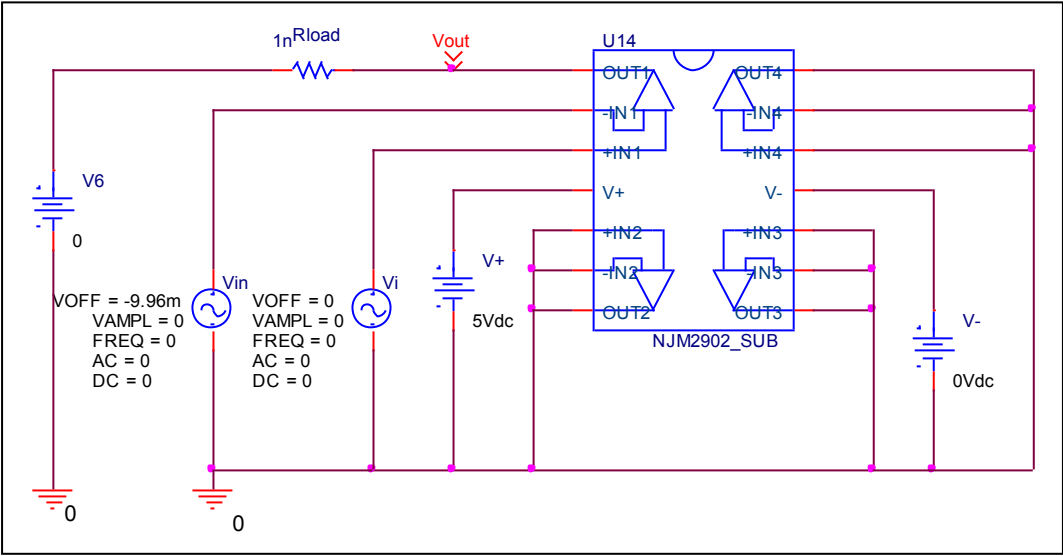


Short Circuit Current	Data sheet	Simulation	%Error
	2mA	2.025mA	1.25

Common-Mode Rejection Voltage gain

Simulation result

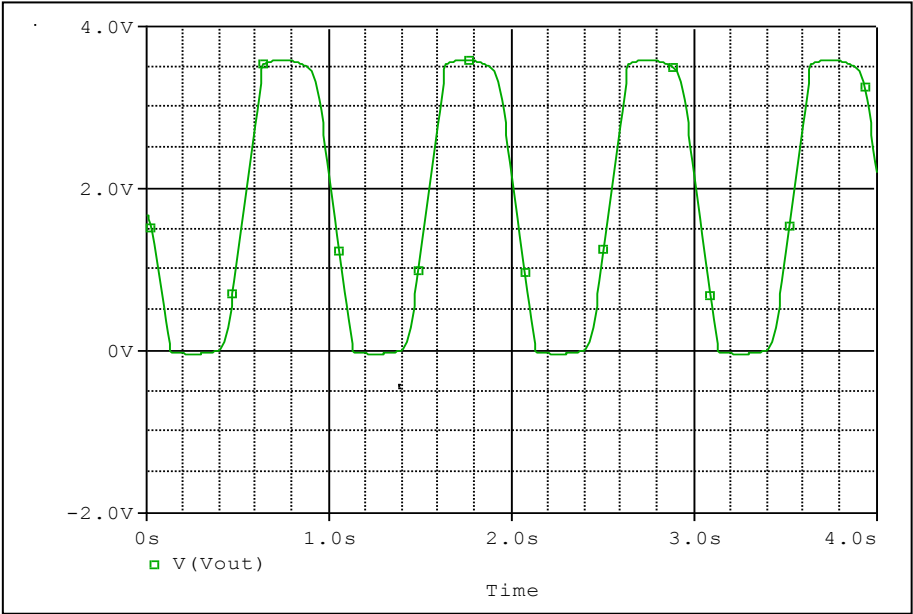

Evaluation circuit

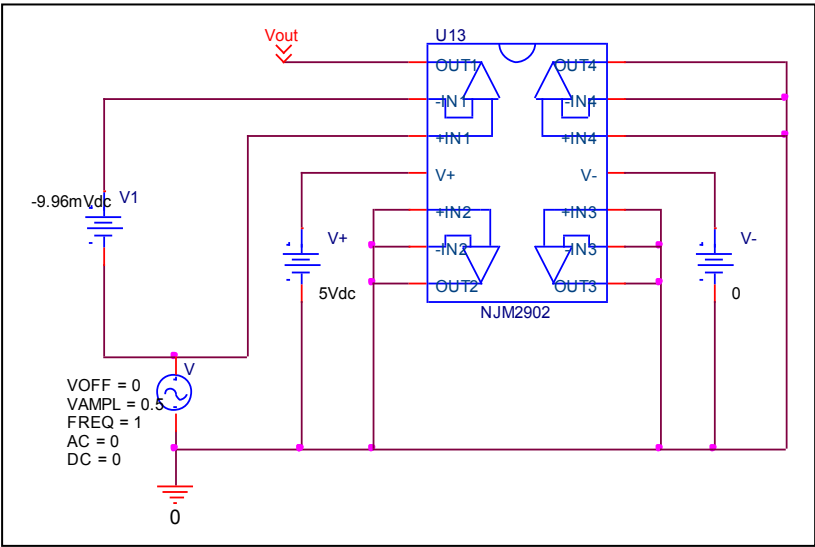

Common Mode Reject Ratio= $102411/3.618=28305.97=89\text{db}$

CMRR	Data sheet	Simulation	%Error
	85	89	4.705