

Device Modeling Report


COMPONENTS:MOSFET: OPERATIONAL AMPLIFIER
PART NUMBER:NJM4562L
MANUFACTURER: NEW JAPAN RADIO CO.,LTD



Bee Technologies Inc.


Output Voltage Swing, +Vout and –Vout

Simulation result

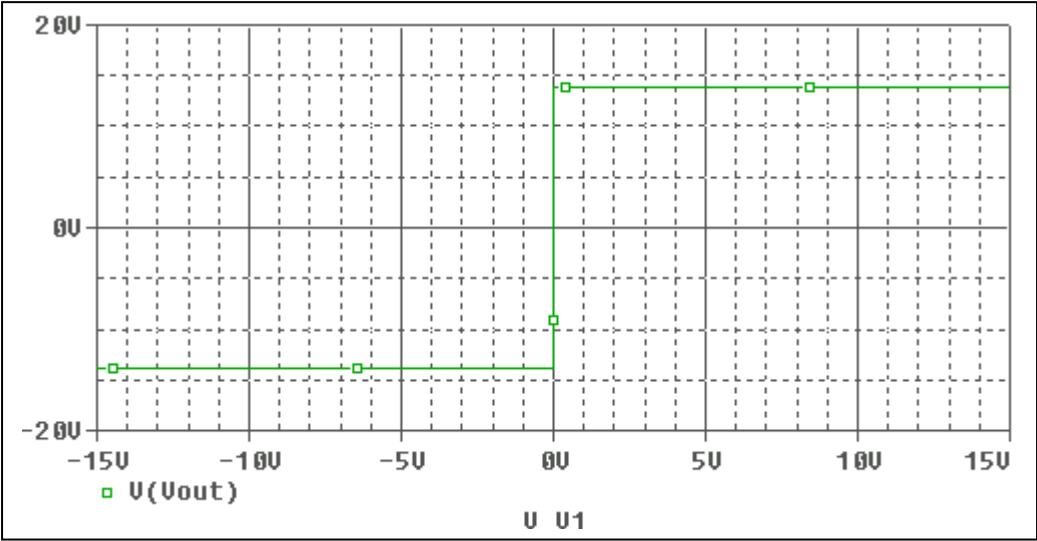

These simulation results are compared with $\pm V_{out}$


Evaluation circuit

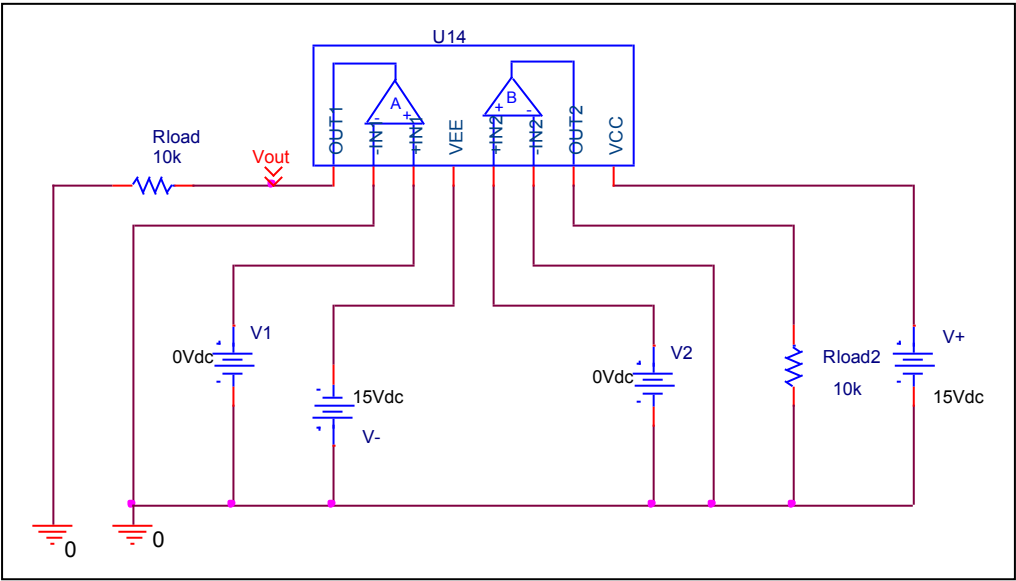


Output Voltage Swing	Data sheet	Simulation	%Error
+Vout(V)	+14	13.943	0.407
-Vout(V)	-14	-13.943	0.407

Input Offset Voltage

Simulation result

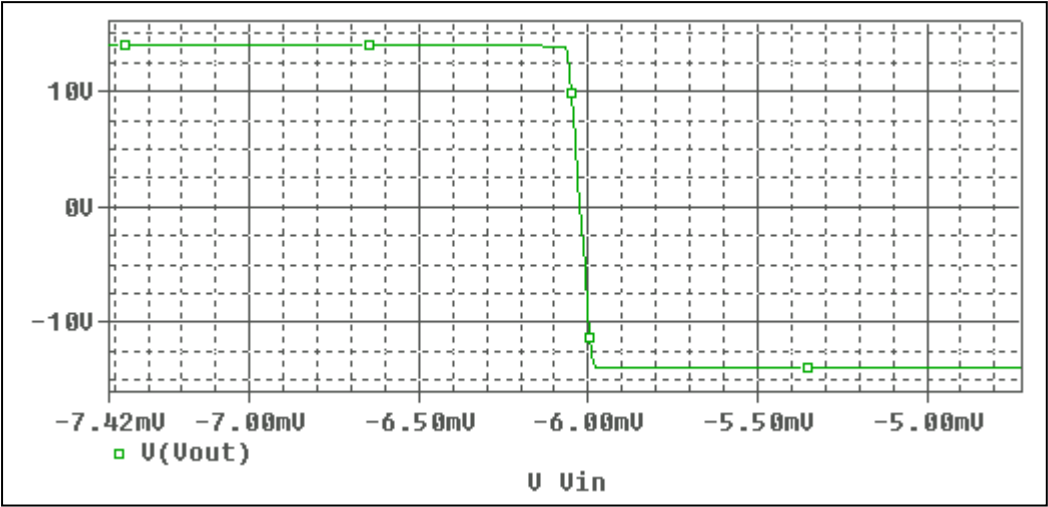


Evaluation circuit

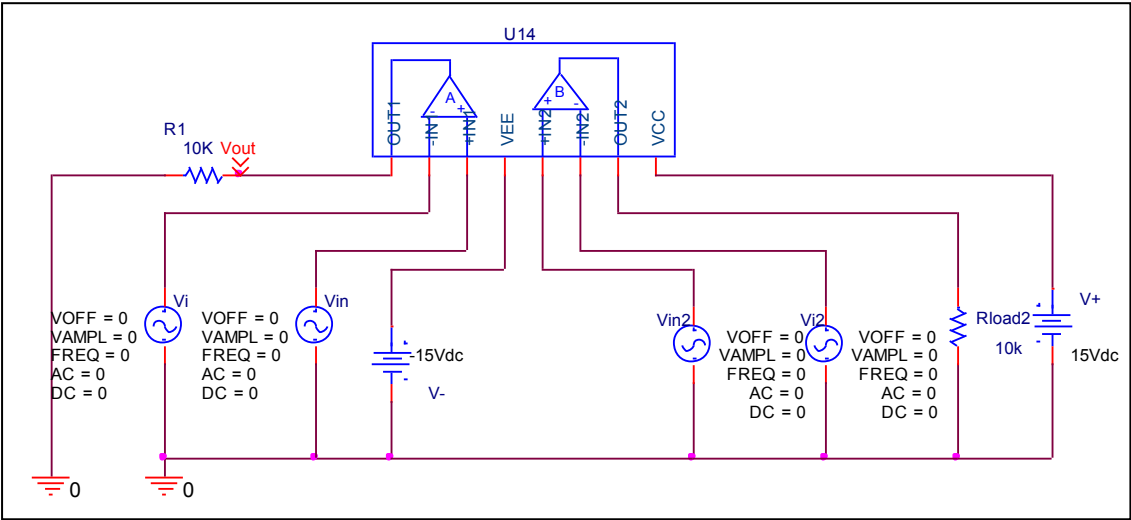


Vos	Measurement		Simulation		Error	
	6	mV	6.0242	mV	0.403	%

Slew Rate, +SR, -SR

Simulation result

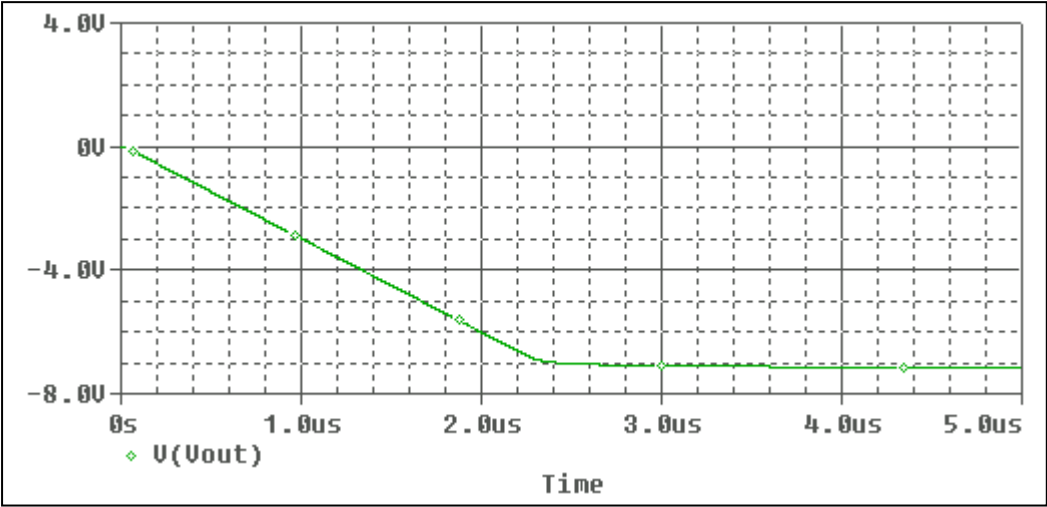


Evaluation circuit

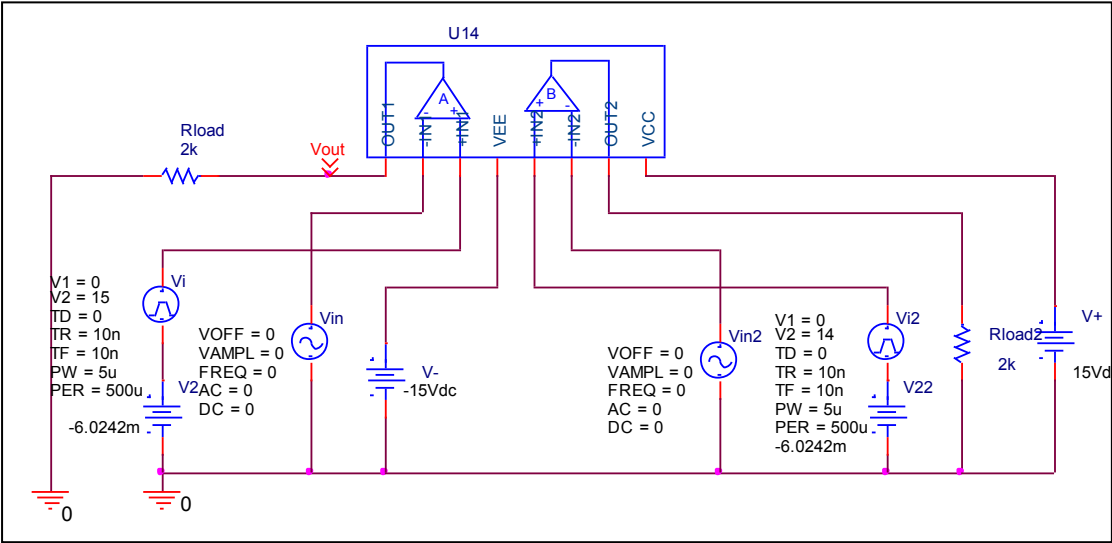


Slew Rate(v/us)	Data sheet	Simulation	%Error
	3V/us	3.031V/us	1.03

Input current Ib, Ibos

Simulation result

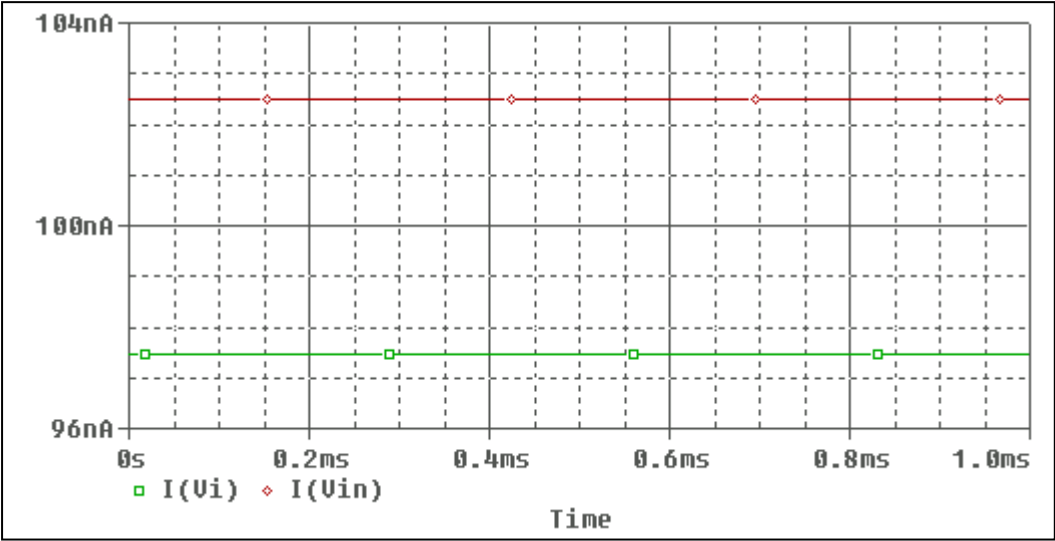


Evaluation circuit

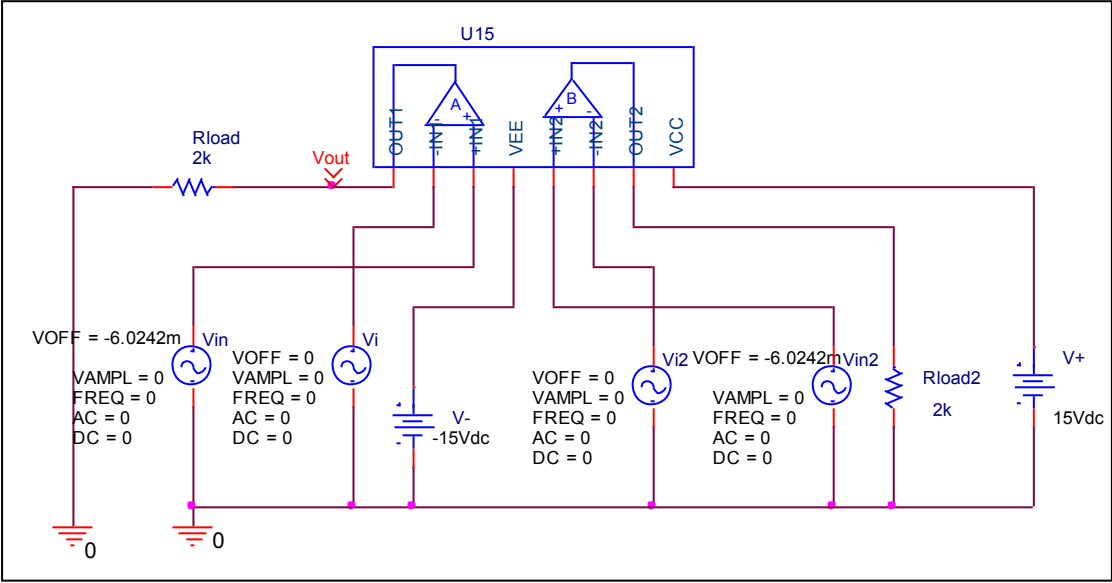


	Data sheet	Simulation	%Error
Ib(nA)	100	99.97	0.03
Ibos(nA)	5	5.017	1.42

Open Loop Voltage Gain vs. Frequency , Av-dc, f-0dB

Simulation result

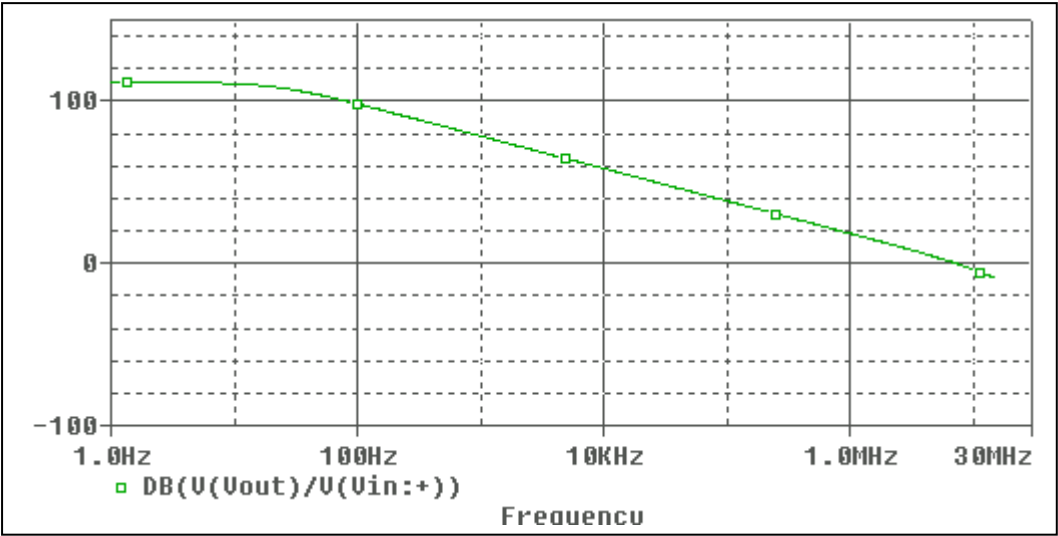


Evaluation circuit

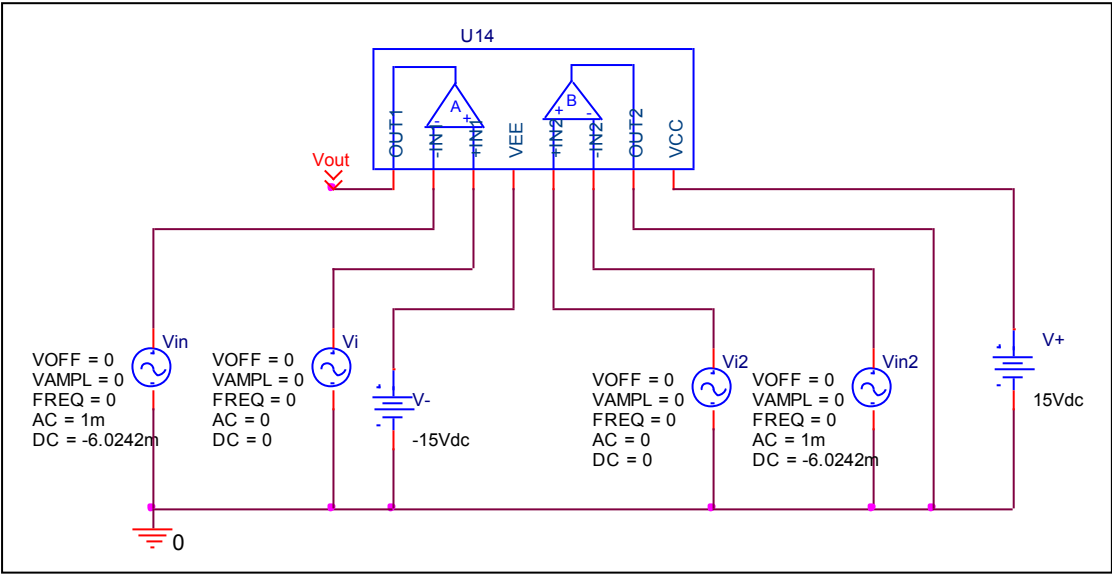


	Data sheet	Simulation	%Error
f-0dB(MHz)	7	7.008	0.114
Av-dc(dB)	110	110.022	0.02

Output Short Circuit Current - Ios

Simulation result

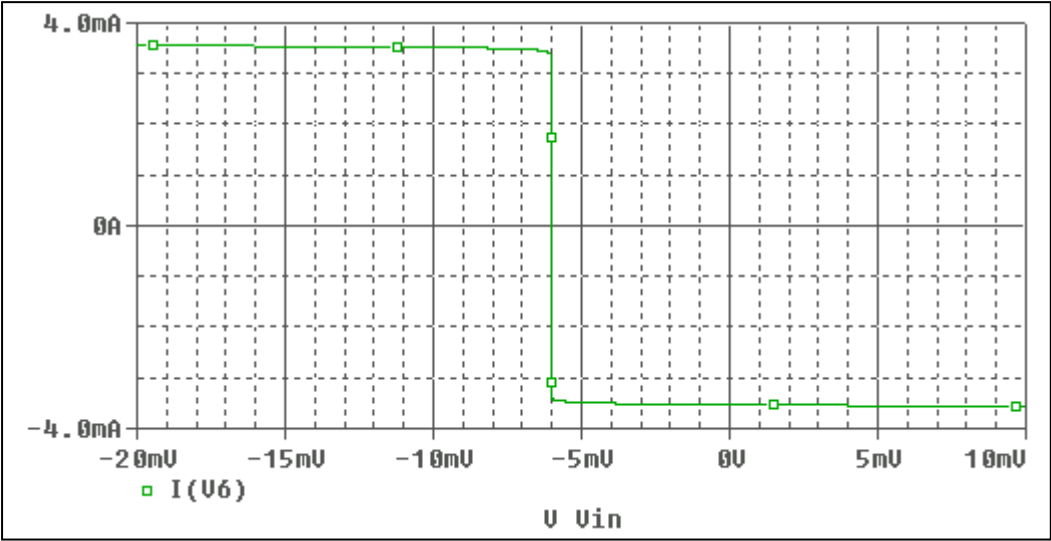


Evaluation circuit

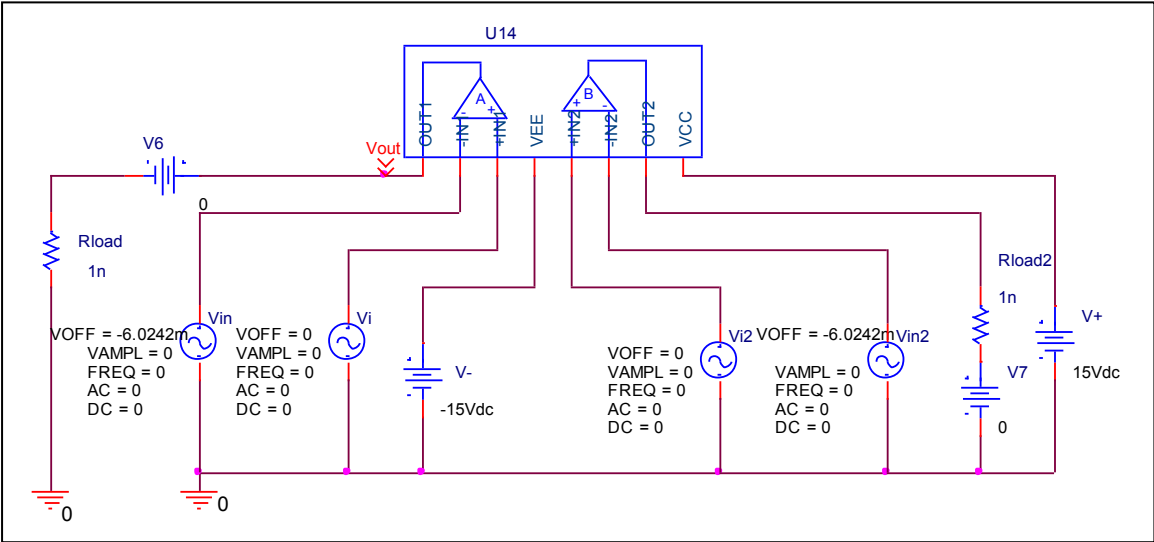


Short Circuit Current	Data sheet	Simulation	%Error
	3.5mA	3.5073mA	0.208

Common-Mode Rejection Voltage gain

Simulation result

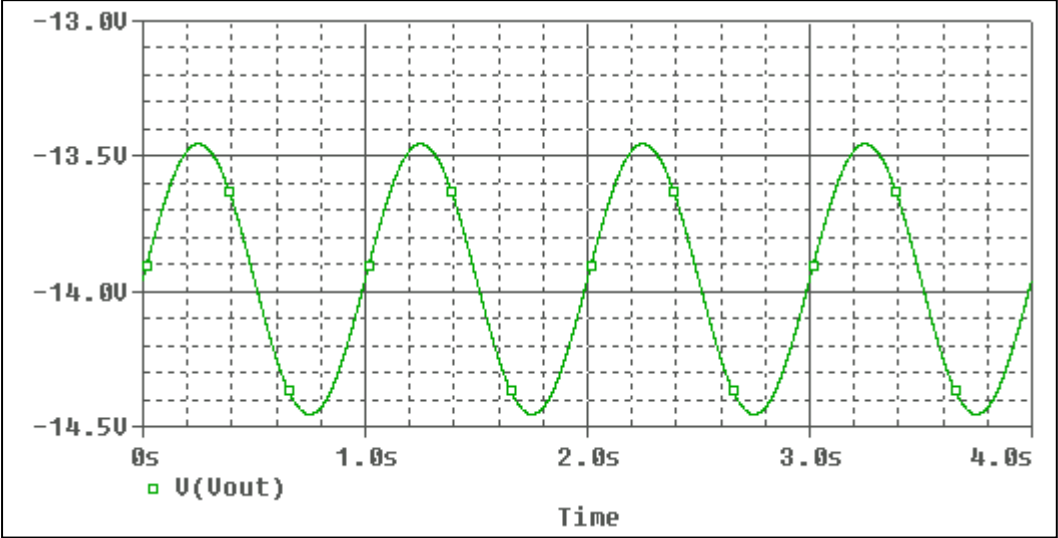

Evaluation circuit

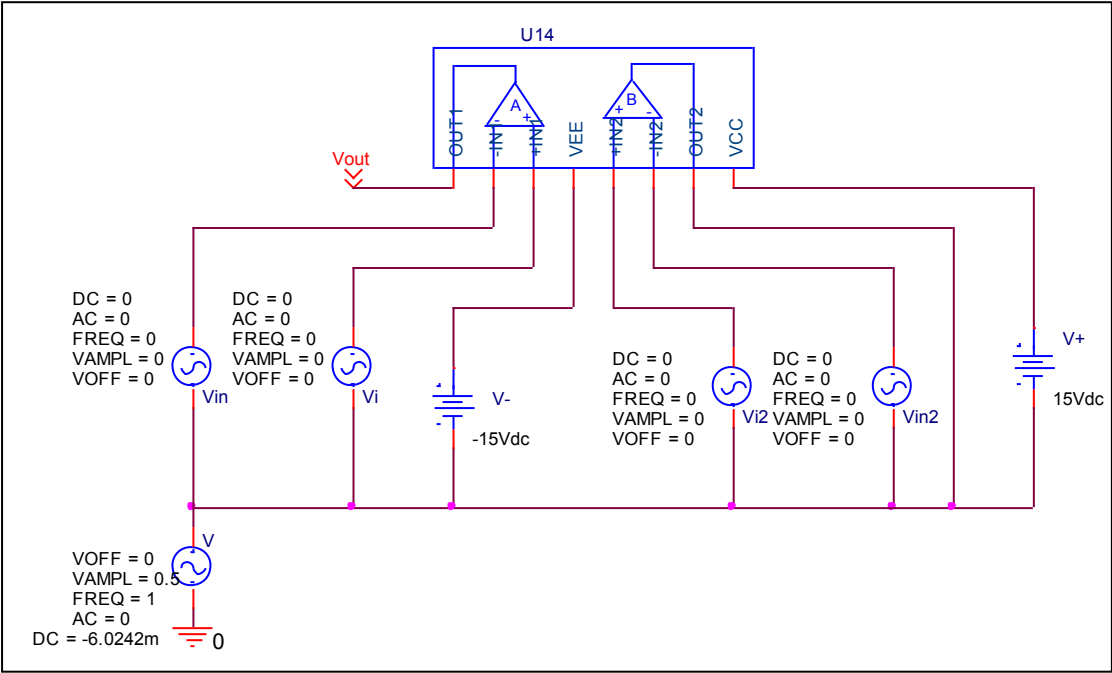

Common mode gain=10/1
Common Mode Reject Ratio=317029/10=31702.9

CMRR	Data sheet	Simulation	%Error
	31622	31702.9	0.255